

# ATTESTATION

of conformity

## with European Directives


**For the following**

**Product** : Network Video Recorder  
**Model Name** : DR-2304P  
**Variant Model Name** : DIR440, EN4104P

**Manufactured at** : IDIS CO., LTD.  
**Address** : 8-10, TECHNO 3-RO, YUSEONG-GU,  
DAEJEON, KOREA

The submitted sample of the above equipment has been tested for CE marking according to following European Directive and standards:

- Electromagnetic Compatibility Directive 2014/30/EU

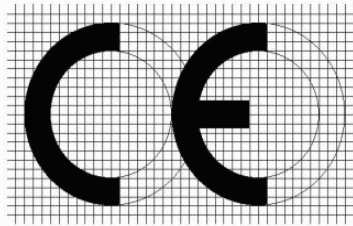

The referred test report(s) show that the product complies with standard(s) recognized as giving presumption of compliance with the essential requirements in the specified European Directive. This verification does not imply assessment of the production of the product. The CE marking may be affixed if all relevant and effective European Directives with CE are applicable.

The standards relevant for the evaluation of EMC requirements are as follows:

**Test Standards** : EN 55032:2015, Class A  
EN 50130-4:2011/A1:2014  
EN 61000-3-2:2014  
EN 61000-3-3:2013

**Date of issue: August 29, 2016**

**IDIS CO., LTD.**

8-10, TECHNO 3-RO, YUSEONG-GU,  
DAEJEON, KOREA

-----  
(Name and signature of authorized person)

# TEST REPORT

**KCTL Inc.**

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82 70 5008 1021  
FAX: 82 505 299 8311

Report No.: KR16-SEC0050

Page(1) / (76) Pages

**KCTL**  
<http://www.kctl.co.kr>

**Applicant** : IDIS CO., LTD.  
8-10, TECHNO 3-RO, YUSEONG-GU, DAEJEON, KOREA

**Manufacturer** : IDIS CO., LTD.  
8-10, TECHNO 3-RO, YUSEONG-GU, DAEJEON, KOREA

**Type of equipment** : Network Video Recorder

**Model Name** : DR-2304P

**Variant Model Name** : DIR440, EN4104P

**Date of Receipt** : July 27, 2016

**Date of Test** : August 03 ~ August 10, 2016


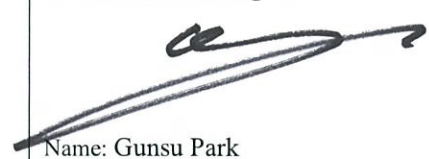
**Test method used** : EN 55032:2015, Class A  
EN 50130-4:2011/A1:2014  
EN 61000-3-2:2014  
EN 61000-3-3:2013

**Test Results** : Complied

This product complies with the requirements of the EMC Directive 2014/30/EU.

The results in this report apply only to the sample tested.

This Test Report cannot be reproduced, except in full, without the written approval of KCTL Laboratory.

Affirmation	Tested by	Technical Manager
	 Name: Seungtae Kim	 Name: Gunsu Park

2016. 08. 29

## Contents

<b>1. Applicant information .....</b>	<b>3</b>
<b>2. Laboratory information .....</b>	<b>4</b>
<b>3. Test system configuration.....</b>	<b>5</b>
3.1 Operation environment .....	5
3.2 Measurement Uncertainty .....	6
3.3 Measurement Program.....	7
<b>4. Description of E.U.T. ....</b>	<b>8</b>
4.1 General information.....	8
4.2 Product description .....	10
4.3 Auxiliary equipments.....	10
4.4 Test configuration .....	11
4.5 Operating conditions.....	12
<b>5. Summary of test results.....</b>	<b>13</b>
5.1 Summary of EMI emission test results .....	13
5.2 Summary of immunity test results .....	13
5.3 Performance criteria.....	14
<b>6. Test results .....</b>	<b>16</b>
6.1 Conducted Emission .....	16
6.2 Radiated Emission .....	27
6.3 Harmonics.....	33
6.4 Flicker.....	41
6.5 Electrostatic Discharge .....	45
6.6 Radio Frequency Electromagnetic Fields .....	50
6.7 Electrical Fast Transient/BURST.....	53
6.8 Surge.....	56
6.9 Conducted Immunity .....	59
6.10 Dips and Interruptions .....	63
6.11 Mains supply voltage variations .....	65
<b>7. E.U.T. photographs.....</b>	<b>66</b>

## 1. Applicant information

**Applicant:** IDIS CO., LTD.  
**Address:** 8-10, TECHNO 3-RO, YUSEONG-GU, DAEJEON, KOREA  
**Telephone:** +82-31-723-5205  
**Fax:** +82-31-723-5108  
**E-mail:** jjungdoo@idis.co.kr  
**Contact name:** **Jungdoo Jang**

**Manufacturer:** IDIS CO., LTD.  
**Address:** 8-10, TECHNO 3-RO, YUSEONG-GU, DAEJEON, KOREA  
**Telephone:** +82-31-723-5205  
**Fax:** +82-31-723-5108  
**E-mail:** jjungdoo@idis.co.kr  
**Contact name:** **Jungdoo Jang**



## 2. Laboratory information

### Address

#### **KCTL Inc.**

65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea

Telephone Number: 82 70 5008 1021

Facsimile Number: 82 505 299 8311


FCC Site Designation No: KR0040, FCC Site Registration No: 687132

VCCI Registration No. : R-3327, G-198, C-3706, T-1849

Industry Canada Registration No. : 8035A

KOLAS NO.: KT231

### **SITE MAP**

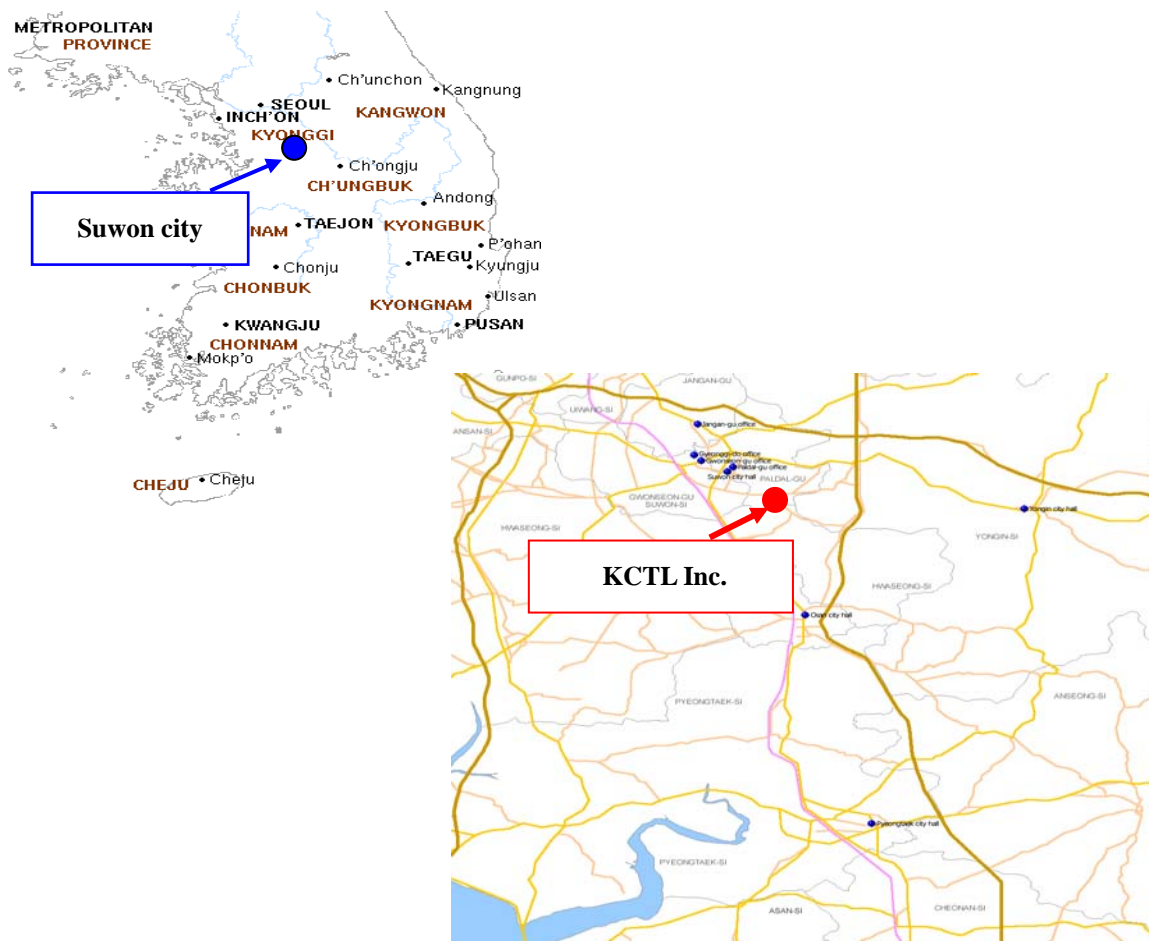

**KCTL Inc.** 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82 70 5008 1021 FAX: 82 505 299 8311

This test report shall not be reproduced, except in full, without the written approval.

### 3. Test system configuration

#### 3.1 Operation environment

	Temperature	Humidity	Pressure
Chamber(10 m)	: 24.7 °C	41.1 % R.H.	-
Shielded room(CE)	: 21.5 °C	52.3 % R.H.	-
Shielded room(ESD)	: 25.4 °C	42.1 % R.H.	100.9 kPa

#### Test site

These testing items were performed following locations;

Test item	Test site
Conducted Emission	Shielded Room
Radiated Emission	10 m Chamber
Harmonics current	EMI Test area(6F)
Voltage fluctuations and flickers	EMI Test area(6F)
Electrostatic discharge	Shielded Room
Radiated RF immunity	6F Fully anechoic chamber (3 m)
Electrical Fast Transient/BURST	Shielded Room
Surge	Shielded Room
Conducted RF immunity	Shielded Room
Voltage dip/interruption	Shielded Room
Mains supply voltage variations	Shielded Room

### 3.2 Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC.

The factors contributing to uncertainties are test receiver, cable loss, antenna factor calibration, Antenna directivity, antenna factor variation with height, antenna phase center variation, antenna frequency interpolation, measurement distance variation, site imperfection, mismatch, and system repeatability.

Based on CISPR 16-4-2, the measurement uncertainty level with a 95 % confidence level was applied.

Conducted emission measurement (C.L.: Approx 95 %, $k = 2$ )		
Shielded Room (CE#1)	9 kHz ~ 150 kHz: 3.80 dB 150 kHz ~ 30 MHz: 3.42 dB	
Shielded Room (CE#2)	9 kHz ~ 150 kHz: 3.82 dB 150 kHz ~ 30 MHz: 3.40 dB	
Radiated Emission measurement (C.L.: Approx 95 %, $k = 2$ )		
10 m Chamber (4F)	30 MHz ~ 300 MHz	3 m: 5.48 dB 10 m: 5.48 dB
	300 MHz ~ 1 000 MHz	3 m: 5.60 dB 10 m: 5.48 dB
	1 GHz ~ 6 GHz	3 m: 6.00 dB
10 m Chamber (2F)	30 MHz ~ 300 MHz	3 m: 5.04 dB 10 m: 5.04 dB
	300 MHz ~ 1 000 MHz	3 m: 5.16 dB 10 m: 5.04 dB
	1 GHz ~ 6 GHz	3 m: 6.10 dB
Radio Frequency Electromagnetic Fields (C.L.: Approx 95 %, $k = 2$ )		
1.85 dB		
Disturbance power Electromagnetic Fields (C.L.: Approx 95 %, $k = 2$ )		
3.20 dB		

### 3.3 Measurement Program

These test items were performed by software programs;

Test item	Measurement Program	
Conducted Emission	EP5CE_V 5.4.0(TOYO)	
Radiated Emission	EP5RE_V 4.6.0(TOYO)	
Harmonics current, Voltage fluctuations and flickers	CTS 4_V 4.6.2 (AMETEK)	
Radiated RF immunity	3F	EMC32_V 9.01.0 (ROHDE & SCHWARZ)
	6F	EMC32_V 8.53.0 (ROHDE & SCHWARZ)
Electrical Fast Transient/BURST, Surge, Magnetic field immunity, Voltage dip/interruption	6F(#1)	ISMIEC_V 4.08(EM TEST)
	6F(#2)	ISMIEC_V 4.07(EM TEST)
	3F(#3)	IEC_V 5.2.9(EM TEST)
Conducted RF immunity	6F(#1)	EMC32_V 9.25.00 (ROHDE & SCHWARZ)
	3F(#2)	ICD_V 5.3.4(EM TEST)

## 4. Description of E.U.T.

### 4.1 General information

Key Feature -for catalog	<ul style="list-style-type: none"> <li>- Total incoming throughput 130Mbps</li> <li>- Up to 120ips Full HD real-time recording</li> <li>- Supports H.265 / H.264 codec</li> <li>- Supports UHD display</li> <li>- Up to 120ips live display</li> <li>- Easy to install, set-up and play with DirectIP™ cameras</li> <li>- Built-in 4 channel PoE Switch</li> <li>- Supports one click network configuration through FEN service</li> <li>- Supports third party cameras (Axis, Panasonic, ONVIF™ )</li> </ul>
<b>VIDEO</b>	
Video Inputs	4 IP channels
3rd party above 5MP available channels	4
IDIS 8MP regist channels	4
IDIS 5MP Fish eye regist channels	4
Max. Incoming Throughput	130Mbps
(Live + Recording + Remote)	(40+40+50)
Supported Camera	DirectIP™, AXIS, PANASONIC, ONVIF™
Video Outputs	1 HDMI, 1 VGA
Display Layout	1x1, 2x2, 3x1
Display Resolution	3840x2160, 1920 x 1200, 1920 x 1080, 1680 x 1050, 1600 x 1200
Display Speed	Up to 120ips
Max. Display Throughput	40Mbps
Digital Zoom	x2 ~ x12
<b>RECORDING</b>	
Max. Throughput	40Mbps, 120ips@Full HD, 60ips @ 4K (UHD)
Recording Resolution	Up to 8MP (Depending on IP Camera)
Recording bit rate(CIF @30ips) - Very High / High / Standard / Basic	1/4 x D1
Recording bit rate(640x360 @30ips) - Very High / High / Standard / Basic	3Mbps / 2.25Mbps / 1.5Mbps / 0.75Mbps
Recording bit rate(D1 @30ips) - Very High / High / Standard / Basic	4Mbps / 3Mbps / 2Mbps / 1Mbps
Recording bit rate(720P @30ips) - Very High / High / Standard / Basic	6Mbps / 6Mbps / 4Mbps / 2Mbps
Recording bit rate(FHD @15ips) - Very High / High / Standard / Basic	7.2Mbps / 5.76Mbps / 4.32Mbps / 2.88Mbps
Recording bit rate(FHD @30ips) - Very High / High / Standard / Basic	10Mbps / 8Mbps / 6Mbps / 4Mbps
Recording bit rate(1536x1536 @30ips) - Very High / High / Standard / Basic	12Mbps / 10Mbps / 8Mbps / 4Mbps
Recording bit rate(2560x2048 @30ips) - Very High / High / Standard / Basic	16Mbps / 14Mbps / 12Mbps / 10Mbps
Recording bit rate(3840x2160 @15ips) - Very High / High / Standard / Basic	12Mbps / 10Mbps / 8Mbps / 7Mbps

Encoding Mode	CBR, VBR *
Compression	H.264, H.265
Recording Mode	Time-Lapse, Event, Pre-Event, Panic
Trigger Events	Alarm In, Audio detection, Motion detection, Trip-zone, Tampering, Video loss
<b>PLAYBACK</b>	
Performance	4ch Full HD synchronous playback
Search Mode	Time-lapse, Event log,Thumbnail, Motion, Text-in
Digital Zoom	x2 ~ x12
<b>STORAGE</b>	
HDD	SATA x2, eSATA x1,(Up to 4TB capacity for each disk)
Total Capacity	24TB=4TB x (2 +1x4)
Data Export Device	USB HDD, USB Stick
<b>NETWORK</b>	
Client Connection	Gigabit Ethernet(Client) x1
Video In Connection	Fast Ethernet(IP Camera) x4
Transmission Speed	50Mbps / 100Mbps(BRP Mode)
Camera Power	PoE(IEEE 802.3at class 4) supported 4 ports, 30W
Remote Data Export	IDIS Player, AVI, JPG
Event Notification	Email (attach clip (.cbr) .MP4), Callback to Remote S/W, Push notification (IDIS Mobile), SNS (Twitter)
Two-way Audio	yes (NVR<->Camera, IRAS <->Camera)
Client Viewer	IDIS Center, IDIS Mobile, IDIS Web, IDIS Solution Suite
<b>INTERFACE</b>	
Audio In/ Out	Local(NVR) : - / 1RCA + 1HDMI IP Camera : 4 / 4 (Depending on IP Camera)
- NVR AUDIO ( Impedance) In / Out	---
- NVR AUDIO (Signal Level) In / Out	---
- Frequency Range Live / Record	16KHz sampling, 16bit per sample
- Sampling Frequency Live / Record	16KHz sampling, 16bit per sample
- Audio Data Size	64Kbps (per channel)
- Audio Codec Format	G.711, G.726
Alarm In / Out	Local(NVR) : 4 / 1 IP Camera : 4 / 4 (Depending on IP Camera)
- NVR Alarm Spec- In	4 TTL, NC/NO programmable, 2.4V (NC) or 0.3V (NO) threshold, 5VDC
- NVR Alarm Spec- Out	1 relay output, 2A@125VAC, 1A@30VDC (NO)
- NVR Alarm Spec - Reset IN	-
- Internal Buzzer	Yes
Alarm Reset In	-
Serial Interface	RS232 (Terminal Block)
USB	USB 2.0 x 1, USB 3.0 x 1
User Interface	Mouse, IR Remote Control, Network Remote Keyboard
<b>GENERAL</b>	
Operating System	Embedded Linux
System Language	English, French, German, Italian, Spanish, Dutch, Danish, Russian, Polish, Hungarian, Czech, Portuguese, Croatian, Finnish, Swedish, Turkish, Korean, Japanese
User Guide Language	English, Korean, Japanese German, Italian, French, Spanish, Dutch, Turkish, Russian (1.0.0)
Quick Guide Language	English, Korean, Japanese German, Italian, French, Spanish, Dutch, Turkish, Russian (1.0.0)
UNIT Dimensions (W x H x D)	300mm x 62mm x 231 mm (11.8" x 2.4" x 9.1")
Unit Weight	2.21kg (5.1lb) (with 1 HDD)
Shipping Dimensions (W x H x D)	460mm x 113mm x 350mm
Shipping Dimensions	3.9kg (with 1 HDD)
Working Temperature	0°C to 40°C (32°F ~ 104°F)
Operating Humidity	0% ~ 90%
Power	NVR Adaptor (Input : 100-240V AC, 60/60Hz, 1.6A, Output : 12V DC, 6A) PSE Adaptor (Input : 100-240VAC, 60/60Hz, 1.6A, Output : 48V DC, 1A)
Power Input	DC 12V 1.78A (for NVR), DC 48V 0.65A(for PSE)
Power Consumption	21.12W (for NVR), Max. 31.2W (for PSE)

## 4.2 Product description


Type of product	Network Video Recorder
Model name (Basic)	DR-2304P
Model name (Variant)	DIR440, EN4104P
Difference	Buyer model names.
Trade name	-
Serial no	-
Testing Voltage	230 V, 50 Hz
Input/Output range	* AC/DC Adaptor #1 (PA-1061-81) Input: 100 - 240 V, 50/60 Hz, 1.6 A Output: DC 12V, 5.0 A *AC/DC Adaptor #2 (DSA-48PFA-48 2 480100) Input: 100 - 240 V, 50/60 Hz, 1.2 A Output: DC 48 V, 1 A
Internal clock frequency	6 GHz
Note	* AC/DC adaptors were provided by the manufacturer. * Front Type#1

## 4.3 Auxiliary equipments

Type	Model / Part #	Serial number	Manufacturer
Note PC	NT271B5E	JGFE919DB00025Z	SAMSUNG
Monitor #1	SMT-2231P	YDQ03VDBB02500H	SAMSUNG
Monitor #2	D2214Hb	-	Dell
Camera	MNC322D	-	IDIS
USB Mouse	GP-M3100UE	2C001153	GP Electronics
Controller	SPC-1010	-	SAMSUNG
JIG	-	-	-
External HDD	IT-735	-	IT-CEO
USB Memory (16 GB)	-	-	SanDisk



#### 4.4 Test configuration

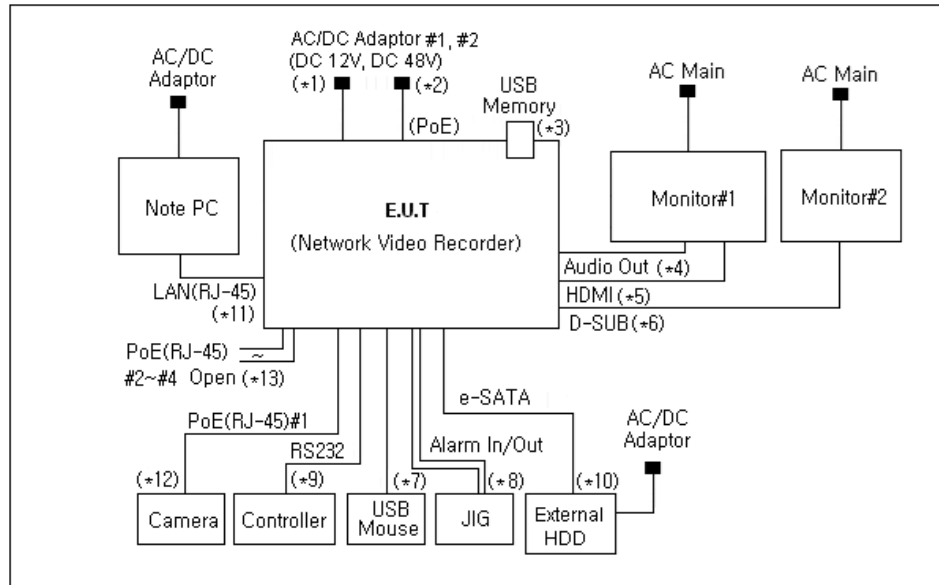

Note *	Start		End		Cable		
	Name	I/O port	Name	I/O port	Length (m)	Spec.	Cable
1	EUT (Network Video Recorder)	Power #1	AC/DC Adaptor#1 (DC 12V)	Power #1	1.5	Unshield	-
2		Power(PoE) #2	AC/DC Adaptor#2 (DC 48V)	Power(PoE) #2	1.5	Unshield	-
3		USB 3.0	USB Memory	USB 3.0	Direct	-	-
4		Audio Out	Monitor#1	Audio In	3.0	Shield	Out-door
5		HDMI	Monitor#1	HDMI	2.0	Shield	-
6		D-SUB	Monitor#2	D-SUB	1.8	Shield	-
7		USB 2.0	USB Mouse	USB 2.0	1.8	Shield	-
8		Alarm In/Out	JIG	Alarm In/Out	3.0	Unshield	Out-door
9		RS232	Controller	RS232	3.0	Unshield	Out-door
10		e-SATA	External HDD	e-SATA	2.0	Shield	-
11		LAN(RJ-45)	Note PC	LAN(RJ-45)	3.0	Unshield	Out-door
12		PoE(RJ-45)#1	Camera	PoE(RJ-45)#1	3.0	Unshield	Out-door
13		PoE(RJ-45) #2~#4	Open	-	3.0	Unshield	Out-door

## 4.5 Operating conditions

The EUT was configured as normal intended use.

Test mode	Normal operating
1	Monitoring test using the Camera. (HDMI, D-SUB: 1 920 X 1 080)
	Check the recording video using the USB Memory.
	Audio Out test using the Monitor#1.
	RS232 test using the Controller.
	Alarm In/Out test using the JIG.
	Ping test.

## 5. Summary of test results

### 5.1 Summary of EMI emission test results

Applied	Test items	Test method	Result
<input checked="" type="checkbox"/>	Conducted Emission	EN 55032:2015	Pass
<input checked="" type="checkbox"/>	Radiated Emission	EN 55032:2015	Pass
<input checked="" type="checkbox"/>	Harmonics current	EN 61000-3-2:2014	Pass
<input checked="" type="checkbox"/>	Voltage fluctuations and flickers	EN 61000-3-3:2013	Pass

### 5.2 Summary of immunity test results

Applied	Test items	Test method	Result
<b>* EN 50130-4:2011/A1:2014</b>			
<input checked="" type="checkbox"/>	Electrostatic discharge	EN 61000-4-2:2009	Pass
<input checked="" type="checkbox"/>	Radiated RF immunity	EN 61000-4-3:2006+A2:2010	Pass
<input checked="" type="checkbox"/>	Electrical Fast Transient/BURST	EN 61000-4-4:2012	Pass
<input checked="" type="checkbox"/>	Surge	EN 61000-4-5:2014	Pass
<input checked="" type="checkbox"/>	Conducted RF immunity	EN 61000-4-6:2014	Pass
<input checked="" type="checkbox"/>	Voltage dip/interruption	EN 61000-4-11:2004	Pass
<input checked="" type="checkbox"/>	Mains supply voltage variations	EN 50130-4:2011/A1:2014	Pass

### 5.3 Performance criteria

The variety and the diversity of the apparatus within the scope of this document makes it difficult to define precise criteria for the evaluation of the immunity test results.

If as a result of the application of the tests defined in this standard, the apparatus becomes dangerous or unsafe then the apparatus shall be deemed to have failed the test.

A functional description and a definition of performance by the manufacture and noted in the test report, based on the following criteria:

#### **Electrostatic discharge**

There shall be no damage, malfunction or change of status due to the conditioning.

Flickering of an indicator during the application of discharge is permissible, providing that there is no residual change in the EUT or any change in outputs, which could be interpreted by associated equipment as a change. The EUT shall meet the acceptance criteria for the functional test (see Clause 6), after the conditioning.

#### **Radiated electromagnetic fields**

There shall be no damage, malfunction or change of status due to the conditioning.

Flickering of an indicator during the conditioning is permissible, providing that there is no residual change in the EUT or any change in outputs, which could be interpreted by associated equipment as a change, and no such flickering of indicators occurs at a field strength of 3 V/m.

For components of CCTV systems, where the status is monitored by observing the TV picture, then deterioration of the picture is allowed at 10 V/m, providing.

- (a) there is no permanent damage or change to the EUT  
(e.g. no corruption of memory or changes to programmable setting etc.)
- (b) at 3 V/m, any deterioration of the picture is so minor that the system could still be used; and
- (c) there is no observable deterioration of the picture at 1 V/m.

The EUT shall meet the acceptance criteria for the functional test(see Clause 6), after the conditioning.

#### **Fast transient burst / slow high energy voltage surge**

There shall be no damage, malfunction or change of status due to the conditioning.

Flickering of an indicator during the application of the bursts is permissible, providing that there is no residual change in the EUT or any change in outputs, which could be interpreted by associated equipment as a change. The EUT shall meet the acceptance criteria for the functional test (see Clause 6), after the conditioning.

### **Slow high energy voltage surge**

There shall be no damage, malfunction or change of status due to the conditioning.

Flickering of an indicator during the application of the surges is permissible, providing that there is no residual change in the EUT or any change in outputs, which could be interpreted by associated equipment as a change. The EUT shall meet the acceptance criteria for the functional test (see Clause 6), after the conditioning.

### **Conducted RF immunity**

There shall be no damage, malfunction or change of status due to the conditioning.

Flickering of an indicator during the conditioning is permissible, providing that there is no residual change in the EUT or any change in outputs, which could be interpreted by associated equipment as a change, and no such flickering of indicators occurs at  $U_0 = 130 \text{ dB}\mu\text{V}$ .

For components of CCTV systems, where the status is monitored by observing the TV picture, then deterioration of the picture is allowed at  $U_0 = 140 \text{ dB}\mu\text{V}$ , providing

- (a) there is no permanent damage or change to the EUT  
(e.g. no corruption of memory or changes to programmable settings, etc.)
- (b) at  $U_0 = 130 \text{ dB}\mu\text{V}$ , any deterioration of the picture is so minor that the system could still be used, and
- (c) there is no observable deterioration of the picture at  $U_0 = 120 \text{ dB}\mu\text{V}$ .

The EUT shall meet the acceptance criteria for the functional test(see Clause 6), after the conditioning.

### **Voltage dip/interruption / Voltage variation**

There shall be no damage, malfunction or change of status due to the conditioning.

Flickering of an indicator during the conditioning is permissible, providing that there is no residual change in the EUT or any change in outputs, which could be interpreted by associated equipment as a change. The EUT shall meet the acceptance criteria for the functional test(see Clause 6), after the conditioning.

### **Mains supply voltage variations**

There shall be no damage, malfunction or change of status due to the different supply voltage conditions.

The EUT shall meet the acceptance criteria for the functional test(see Clause 6), during the conditioning.

## 6. Test results

### 6.1 Conducted Emission

Test specification	EN 55032:2015, Class A		
Testing voltage	230 V, 50 Hz		
Test facility	Shielded room (CE#1)		
Date	2016. 08. 03		
Temperature (°C)	21.5 °C	Humidity (% R.H.)	52.3 % R.H.
Remarks	Pass		

Both conducted lines are measured in Quasi-Peak and C/Average mode, including the worst-case data points for each tested configuration. The EUT measured in accordance with the methods described in standards.

#### 6.1.1 Limits of conducted emission measurement

AC main

Frequency [MHz]	Resolution Bandwidth [kHz]	Class A Limits (dB( $\mu$ V))		Class B Limits (dB( $\mu$ V))	
		Quasi-peak	Average	Quasi-peak	Average
0.15 ~ 0.5	9	79	66	66 ~ 56 *	56 ~ 46*
0.5 ~ 5	9	73	60	56	46
5 ~ 30	9	73	60	60	50

Telecommunication

Frequency [MHz]	Resolution Bandwidth [kHz]	Class A Limits (dB( $\mu$ V))		Current Limits (dB( $\mu$ A))	
		Quasi-Peak	Average	Quasi-Peak	Average
0.15 ~ 0.5	9	97 to 87	84 to 74	53 to 43	40 to 30
0.5 ~ 30	9	87	74	43	30
Frequency [MHz]	Resolution Bandwidth [kHz]	Class B Limits (dB( $\mu$ V))		Current Limits (dB( $\mu$ A))	
		Quasi-Peak	Average	Quasi-Peak	Average
0.15 ~ 0.5	9	84 to 74	74 to 64	40 to 30	30 to 20
0.5 ~ 30	9	74	64	30	20

If the reading on the measuring receiver shows fluctuations close to the limit, the reading shall be observed for at least 15 seconds at each measurement frequency, the highest reading shall be recorded, with the exception of any brief isolated high reading (which shall be ignored).



### 6.1.2 Used equipment

Equipment	Model	Serial No.	Makers	Next Cal. Date	Used
Test Receiver	ESCI	100001	R&S	2017.02.26	<input checked="" type="checkbox"/>
TWO-LINE V-NETWORK	ENV216	101358	R&S	2016.09.03	<input checked="" type="checkbox"/>
TWO-LINE V-NETWORK	ESH3-Z5	100267	R&S	2017.04.07	<input checked="" type="checkbox"/>
8-WIRE ISN CAT5	NTFM 8158 ISN CAT5	CAT5 8158 #138	SCHWARZBECK	2017.05.19	<input checked="" type="checkbox"/>




### 6.1.3 Photographs of test setup

\* AC main

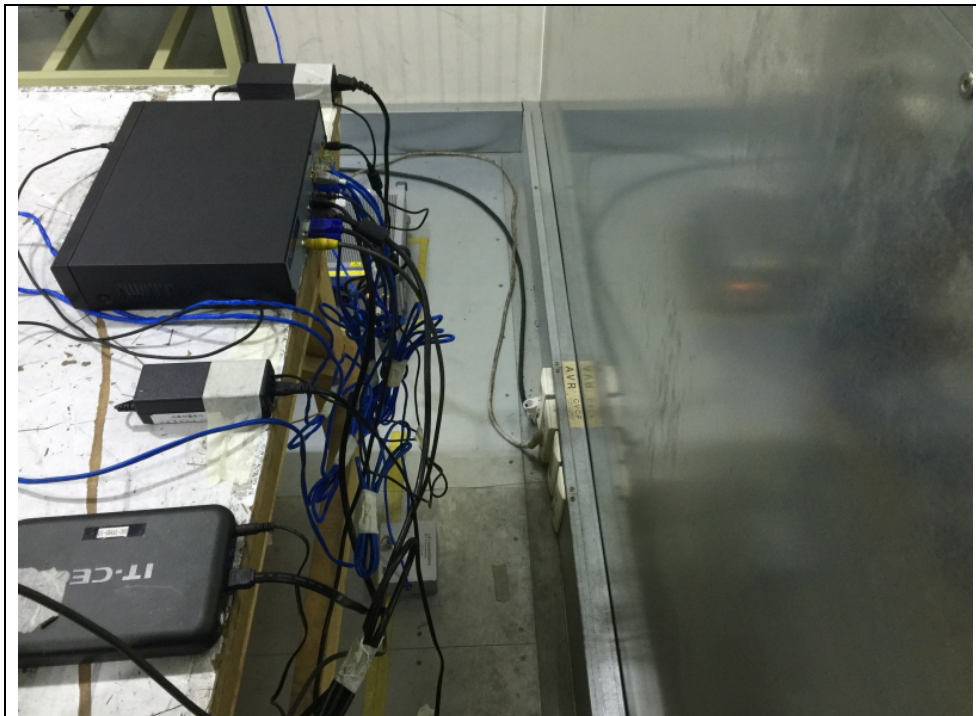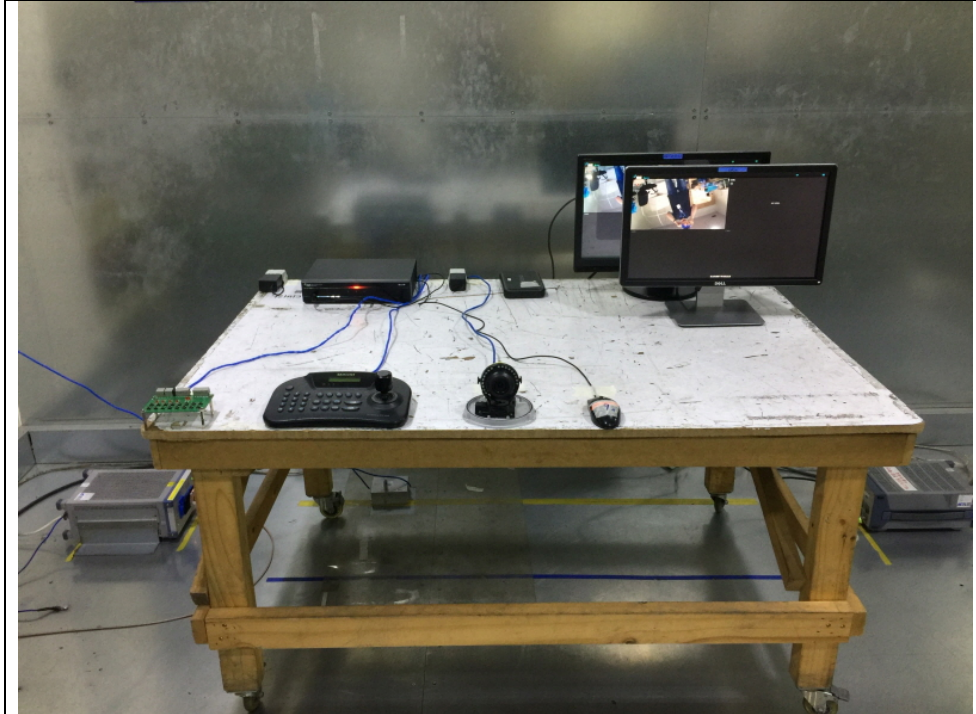


\* Telecommunication

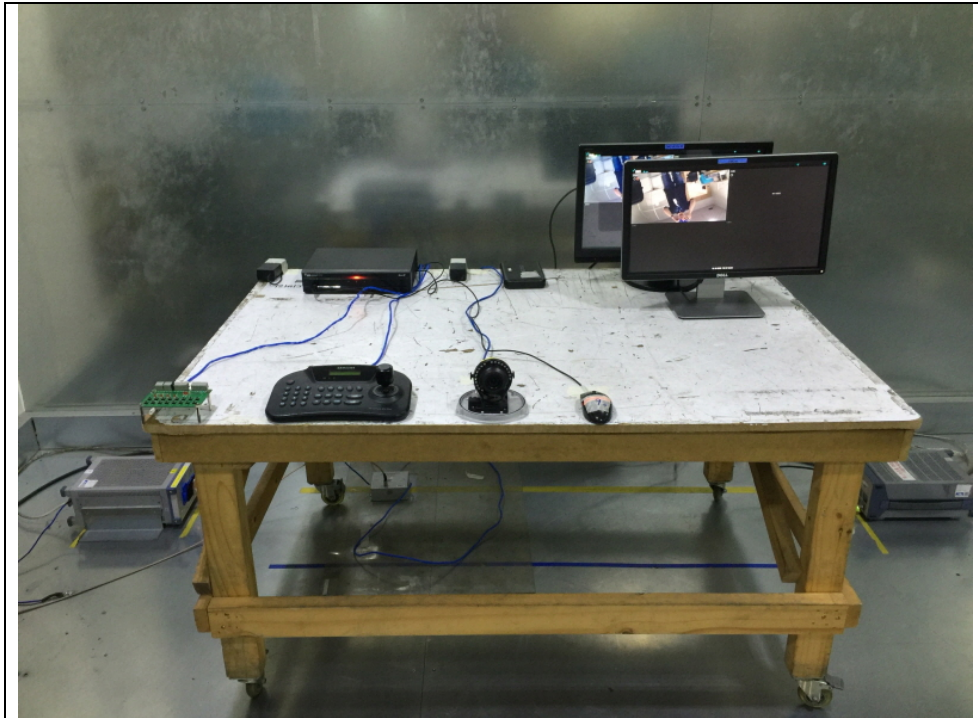

6.1.4 Conducted emission measurement result

\* AC main (DR-2304P)(AC/DC Adaptor#1)

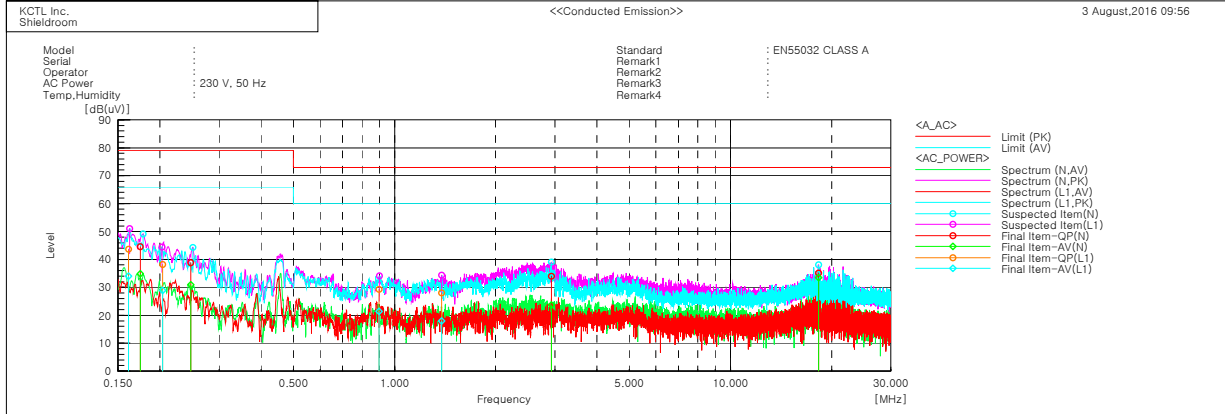

Final Result


--- N Phase ---

No.	Frequency [MHz]	Reading QP [dB(uV)]	Reading CAV [dB(uV)]	c.f [dB]	Result QP [dB(uV)]	Result CAV [dB(uV)]	Limit QP [dB(uV)]	Limit AV [dB(uV)]	Margin QP [dB]	Margin CAV [dB]
1	0.1747	34.6	25.0	9.9	44.5	34.9	79.0	66.0	34.5	31.1
2	0.24738	29.2	21.3	9.7	38.9	31.0	79.0	66.0	40.1	35.0
3	2.92707	24.3	14.0	9.7	34.0	23.7	73.0	60.0	39.0	36.3
4	18.30544	25.2	23.5	9.9	35.1	33.4	73.0	60.0	37.9	26.6

--- L1 Phase ---

No.	Frequency [MHz]	Reading QP [dB(uV)]	Reading CAV [dB(uV)]	c.f [dB]	Result QP [dB(uV)]	Result CAV [dB(uV)]	Limit QP [dB(uV)]	Limit AV [dB(uV)]	Margin QP [dB]	Margin CAV [dB]
1	0.16127	33.8	24.1	9.9	43.7	34.0	79.0	66.0	35.3	32.0
2	0.2039	28.2	18.9	10.0	38.2	28.9	79.0	66.0	40.8	37.1
3	0.89938	19.4	11.4	9.9	29.3	21.3	73.0	60.0	43.7	38.7
4	1.38159	18.2	8.2	9.8	28.0	18.0	73.0	60.0	45.0	42.0

\* AC main (DR-2304P)(AC/DC Adaptor#2)

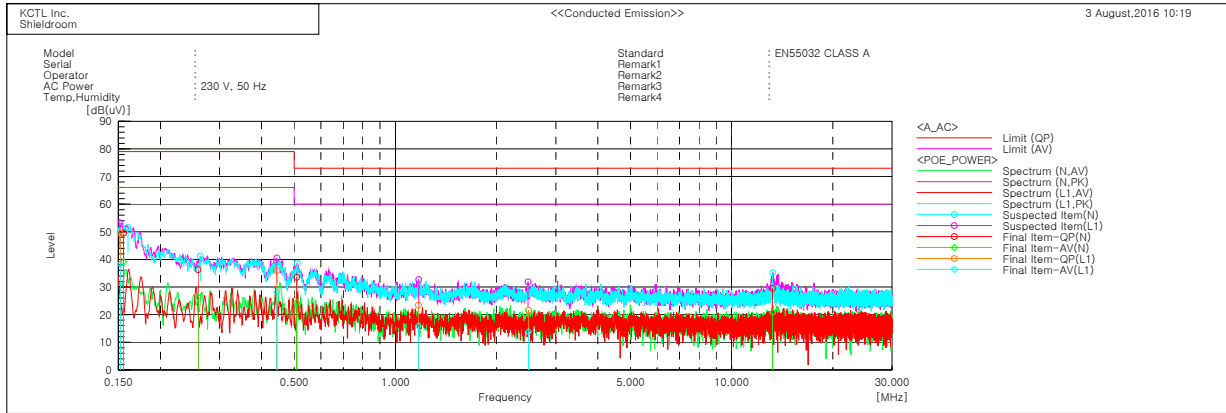

Final Result


--- N Phase ---										
No.	Frequency [MHz]	Reading QP [dB(uV)]	Reading CAV [dB(uV)]	c. f [dB]	Result QP [dB(uV)]	Result CAV [dB(uV)]	Limit QP [dB(uV)]	Limit AV [dB(uV)]	Margin QP [dB]	Margin CAV [dB]
1	0.15549	39.6	29.2	9.9	49.5	39.1	79.0	66.0	29.5	26.9
2	0.25891	26.6	16.7	9.7	36.3	26.4	79.0	66.0	42.7	39.6
3	0.50845	23.5	14.3	10.0	33.5	24.3	73.0	60.0	39.5	35.7
4	13.24446	19.7	10.9	9.9	29.6	20.8	73.0	60.0	43.4	39.2

--- L1 Phase ---										
No.	Frequency [MHz]	Reading QP [dB(uV)]	Reading CAV [dB(uV)]	c. f [dB]	Result QP [dB(uV)]	Result CAV [dB(uV)]	Limit QP [dB(uV)]	Limit AV [dB(uV)]	Margin QP [dB]	Margin CAV [dB]
1	0.1521	39.5	28.4	9.9	49.4	38.3	79.0	66.0	29.6	27.7
2	0.44452	26.1	18.3	9.9	36.0	28.2	79.0	66.0	43.0	37.8
3	1.17016	13.6	6.0	9.9	23.5	15.9	73.0	60.0	49.5	44.1
4	2.48628	11.8	4.1	9.8	21.6	13.9	73.0	60.0	51.4	46.1

\* Telecommunication port

LAN Port (LCL 65 dB)\_10 Mbps (DR-2304P)

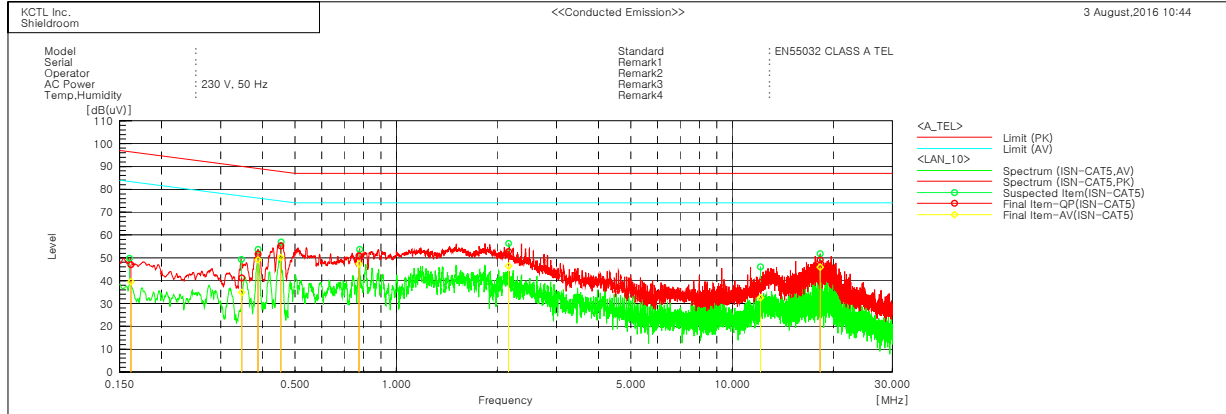


Final Result

--- ISN-CAT5 Phase ---

No.	Frequency [MHz]	Reading QP [dB(uV)]	Reading CAV [dB(uV)]	c.f [dB]	Result QP [dB(uV)]	Result CAV [dB(uV)]	Limit QP [dB(uV)]	Limit AV [dB(uV)]	Margin QP [dB]	Margin CAV [dB]
1	0.16197	37.0	29.6	9.9	46.9	39.5	96.4	83.4	49.5	43.9
2	0.34639	31.5	25.2	9.7	41.2	34.9	90.0	77.0	48.8	42.1
3	0.38768	42.0	39.4	9.7	51.7	49.1	89.1	76.1	37.4	27.0
4	0.45362	45.6	40.4	9.7	55.3	50.1	87.8	74.8	32.5	24.7
5	0.77384	41.2	37.7	9.6	50.8	47.3	87.0	74.0	36.2	26.7
6	2.16248	43.4	37.0	9.4	52.8	46.4	87.0	74.0	34.2	27.6
7	12.14843	29.6	22.9	9.6	39.2	32.5	87.0	74.0	47.8	41.5
8	18.30339	39.4	36.3	9.6	49.0	45.9	87.0	74.0	38.0	28.1

LAN Port (LCL 65 dB)\_100 Mbps (DR-2304P)

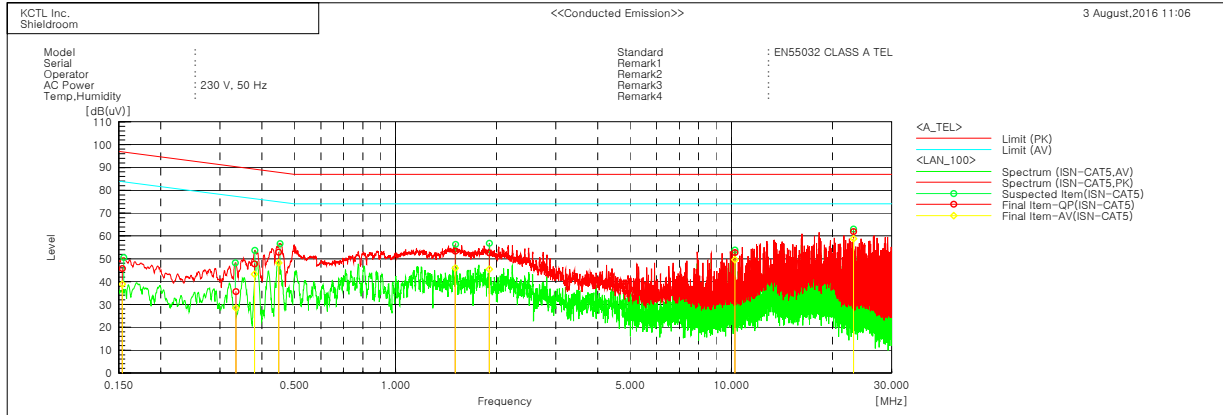


Final Result

No.	Frequency [MHz]	Reading QP [dB(uV)]	Reading CAV [dB(uV)]	c.f [dB]	Result QP [dB(uV)]	Result CAV [dB(uV)]	Limit QP [dB(uV)]	Limit AV [dB(uV)]	Margin QP [dB]	Margin CAV [dB]
1	0.15373	35.8	29.0	9.9	45.7	38.9	96.8	83.8	51.1	44.9
2	0.3349	25.9	18.7	9.7	35.6	28.4	90.3	77.3	54.7	48.9
3	0.38019	38.0	33.5	9.7	47.7	43.2	89.3	76.3	41.6	33.1
4	0.44899	43.2	38.6	9.7	52.9	48.3	87.9	74.9	35.0	26.6
5	1.50723	43.8	36.4	9.5	53.3	45.9	87.0	74.0	33.7	28.1
6	1.90314	43.1	36.0	9.5	52.6	45.5	87.0	74.0	34.4	28.5
7	10.24316	43.1	40.0	9.6	52.7	49.6	87.0	74.0	34.3	24.4
8	23.12806	52.3	49.1	9.6	61.9	58.7	87.0	74.0	25.1	15.3



LAN Port (LCL 65 dB)\_1000 Mbps (DR-2304P)

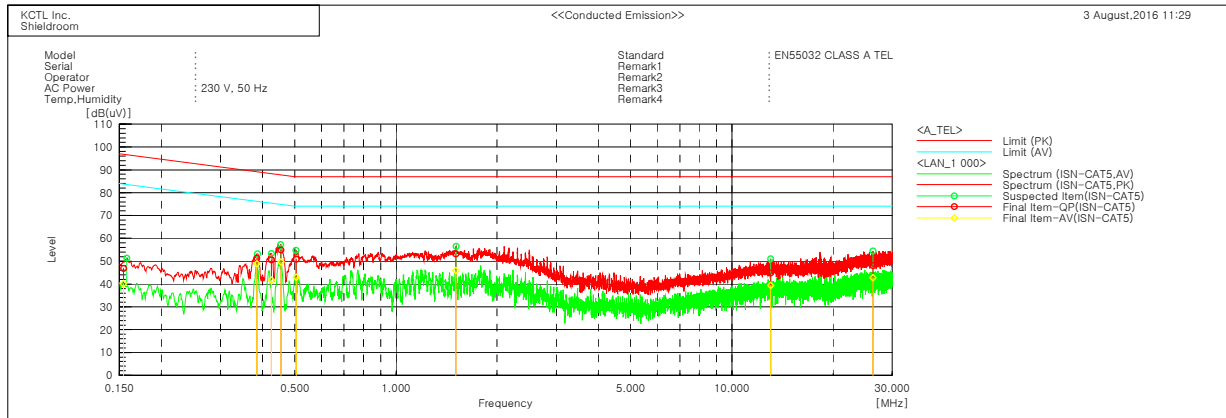


Final Result

--- ISN-CAT5 Phase ---										
No.	Frequency [MHz]	Reading QP [dB(uV)]	Reading CAV [dB(uV)]	c.f [dB]	Result QP [dB(uV)]	Result CAV [dB(uV)]	Limit QP [dB(uV)]	Limit AV [dB(uV)]	Margin QP [dB]	Margin CAV [dB]
1	0.15437	36.9	30.3	9.9	46.8	40.2	96.8	83.8	50.0	43.6
2	0.38494	41.6	39.2	9.7	51.3	48.9	89.2	76.2	37.9	27.3
3	0.4255	40.9	31.9	9.7	50.6	41.6	88.3	75.3	37.7	33.7
4	0.45478	45.2	39.9	9.7	54.9	49.6	87.8	74.8	32.9	25.2
5	0.50466	41.2	33.4	9.6	50.8	43.0	87.0	74.0	36.2	31.0
6	1.50725	43.7	36.4	9.5	53.2	45.9	87.0	74.0	33.8	28.1
7	13.05133	35.2	29.7	9.6	44.8	39.3	87.0	74.0	42.2	34.7
8	26.28396	38.6	33.2	9.5	48.1	42.7	87.0	74.0	38.9	31.3



PoE(RJ-45) Port (LCL 65 dB)\_10 Mbps (DR-2304P)

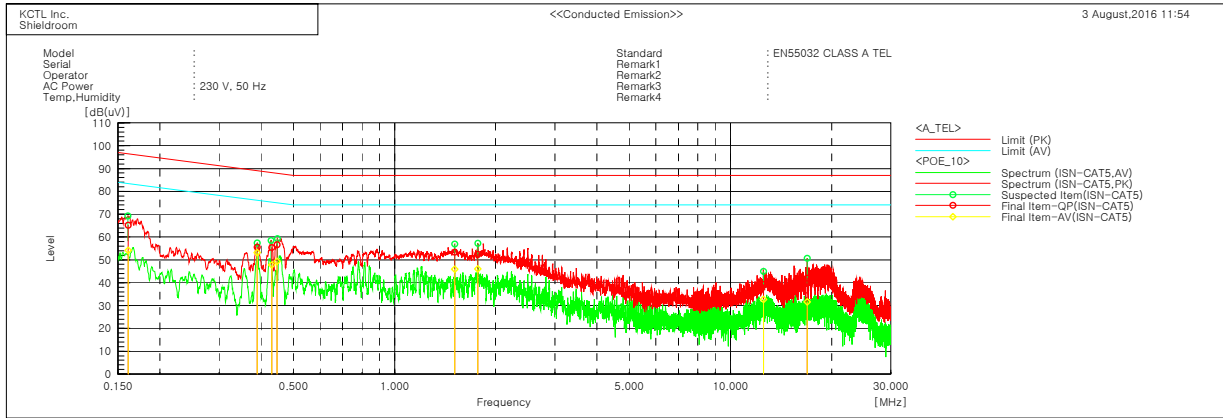


Final Result

--- ISN-CAT5 Phase ---

No.	Frequency [MHz]	Reading QP [dB(uV)]	Reading CAV [dB(uV)]	c.f [dB]	Result QP [dB(uV)]	Result CAV [dB(uV)]	Limit QP [dB(uV)]	Limit AV [dB(uV)]	Margin QP [dB]	Margin CAV [dB]
1	0.16099	55.2	44.3	9.9	65.1	54.2	96.4	83.4	31.3	29.2
2	0.39002	45.9	43.5	9.7	55.6	53.2	89.1	76.1	33.5	22.9
3	0.43022	45.6	38.1	9.7	55.3	47.8	88.2	75.2	32.9	27.4
4	0.44724	46.9	39.5	9.7	56.6	49.2	87.9	74.9	31.3	25.7
5	1.50885	43.9	36.4	9.5	53.4	45.9	87.0	74.0	33.6	28.1
6	1.77083	42.9	36.5	9.5	52.4	46.0	87.0	74.0	34.6	28.0
7	12.55463	29.5	23.1	9.6	39.1	32.7	87.0	74.0	47.9	41.3
8	16.9242	32.4	21.8	9.7	42.1	31.5	87.0	74.0	44.9	42.5

PoE(RJ-45) Port (LCL 65 dB)\_100 Mbps (DR-2304P)

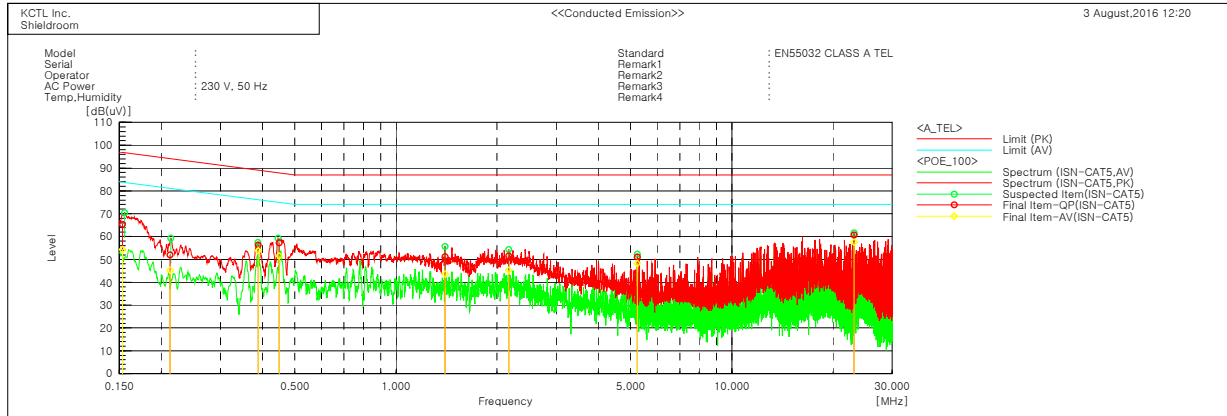

Final Result

--- ISN-CAT5 Phase ---										
No.	Frequency [MHz]	Reading QP [dB(uV)]	Reading CAV [dB(uV)]	c. f [dB]	Result QP [dB(uV)]	Result CAV [dB(uV)]	Limit QP [dB(uV)]	Limit AV [dB(uV)]	Margin QP [dB]	Margin CAV [dB]
1	0.1535	55.4	44.5	9.9	65.3	54.4	96.8	83.8	31.5	29.4
2	0.21262	42.2	35.4	9.8	52.0	45.2	94.1	81.1	42.1	35.9
3	0.38927	46.6	44.1	9.7	56.3	53.8	89.1	76.1	32.8	22.3
4	0.44902	47.5	41.8	9.7	57.2	51.5	87.9	74.9	30.7	23.4
5	1.40021	41.8	34.1	9.5	51.3	43.6	87.0	74.0	35.7	30.4
6	2.16439	42.1	35.8	9.4	51.5	45.2	87.0	74.0	35.5	28.8
7	5.23652	41.5	38.7	9.5	51.0	48.2	87.0	74.0	36.0	25.8
8	23.12803	51.0	47.9	9.6	60.6	57.5	87.0	74.0	26.4	16.5

## 6.2 Radiated Emission

Test specification	EN 55032:2015, Class A		
Testing voltage	230 V, 50 Hz		
Test facility	10 m Chamber (4F)		
Test distance	10 m, 3 m		
Date	2016. 08. 07		
Temperature (°C)	24.7 °C	Humidity (% R.H.)	41.1 % R.H.
Remarks	Pass		

Of those emissions above ( $L - 20$  dB), where  $L$  is the limit level in logarithmic units, record at least the emission levels and the frequencies of the six highest emissions.

The following data lists the significant emission frequencies, measured levels, correction factors (for antenna and cables), orientation of table, polarization and height of antenna, the corrected reading, the limit, and the amount of margin. All measurements were taken utilizing quasi-peak detection unless stated otherwise.

Measurements were performed at an antenna to EUT distance of 10 or 3 meters and elevated between 1 and 4 meters. Both vertical and horizontal antenna polarizations were measured.

Below 1 GHz, peak detector function mode for prescan was used with resolution bandwidth of 120 kHz and a video bandwidth of 300 kHz and sweep method.

The sweep time for prescan set below 200 ms up and final measurement with quasi-peak detector evaluated for suspected frequencies points, which are detected from prescan measurement.

Final measurements consisted of 3 steps.

First step, frequency fine tuning to find exact emission frequency.

Second step, rechecking to search for maximum height and azimuth for interference from EUT

In final step, there are conducted measuring with quasi-peak detector for points which are detected from 1<sup>st</sup> step & 2<sup>nd</sup> step.

### 6.2.1 Limits of radiated emission measurement

Limits below 1 GHz

Frequency [MHz]	Resolution Bandwidth [kHz]	Class A Limits (dB( $\mu$ V/m)) @ 10 m	Class B Limits (dB( $\mu$ V/m)) @ 10 m
30 ~ 230	120	40	30
230 ~ 1 000	120	47	37

Limits above 1 GHz

Frequency [GHz]	Resolution Bandwidth [MHz]	Class A @ 3 m		Class B @ 3 m	
		Average limit (dB( $\mu$ V/m))	Peak limit (dB( $\mu$ V/m))	Average limit (dB( $\mu$ V/m))	Peak limit (dB( $\mu$ V/m))
1 ~ 3	1	56	76	50	70
3 ~ 6	1	60	80	54	74

Note - The lower limit applies at the transition frequency.

Measurements within 20 dB of the limit were then maximized by adjusting turntable position.

Final measurements were made using an C/Average detector.


Results checked manually and points close to the limit line were re-measured.

### 6.2.2 Used equipments

Equipment	Model no.	Serial no.	Makers	Next Cal. Date	Used
Test Receiver	ESR	101078	R&S	2017.02.26	<input checked="" type="checkbox"/>
Bilog Antenna	VULB 9168	583	SCHWARZBECK	2018.06.10	<input checked="" type="checkbox"/>
Amplifier	317	321041	SONOMA INSTRUMENT	2017.03.05	<input checked="" type="checkbox"/>
COAXIAL FIXED ATTENUATOR	8491B-003	2708A18758	Agilent	2016.09.01	<input checked="" type="checkbox"/>
Antenna Mast	AM4.0	079/3440509	MATURO	-	<input checked="" type="checkbox"/>
Turn Table	CO2000-SOFT	-	MATURO	-	<input checked="" type="checkbox"/>
Preamplifier	8449B	3008A01802	AGILENT	2017.04.07	<input checked="" type="checkbox"/>
Horn ANT	3115	00086706	ETS	2016.09.02	<input checked="" type="checkbox"/>
Spectrum Analyzer	FSV40	100988	R&S	2017.01.07	<input type="checkbox"/>



### 6.2.3 Photographs of test setup

\* 30 MHz ~ 1 GHz

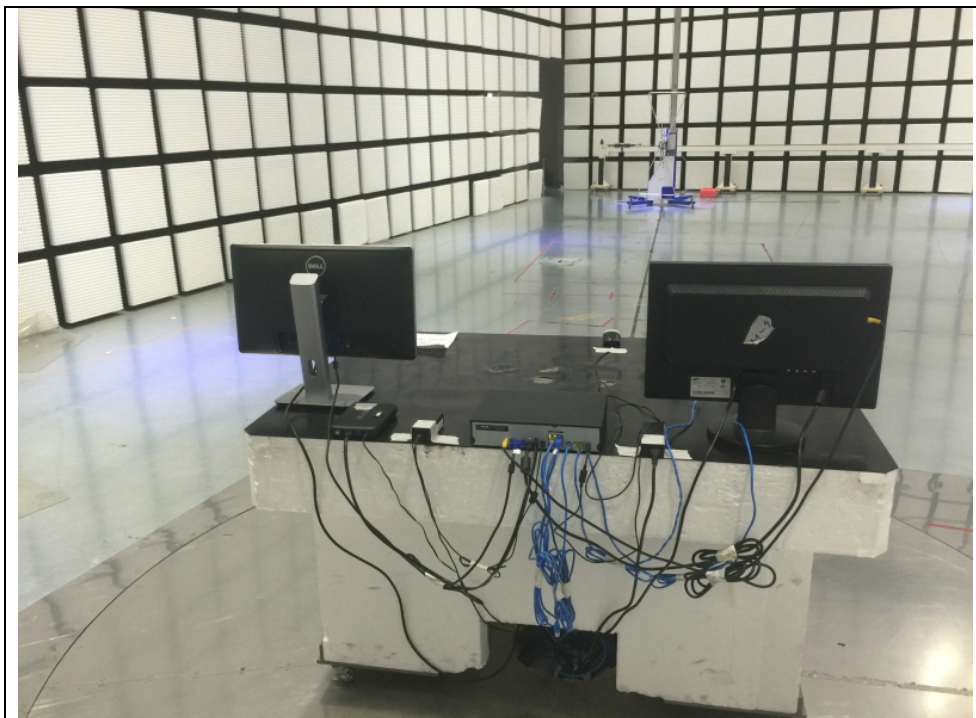




\* 1 GHz ~ 6 GHz

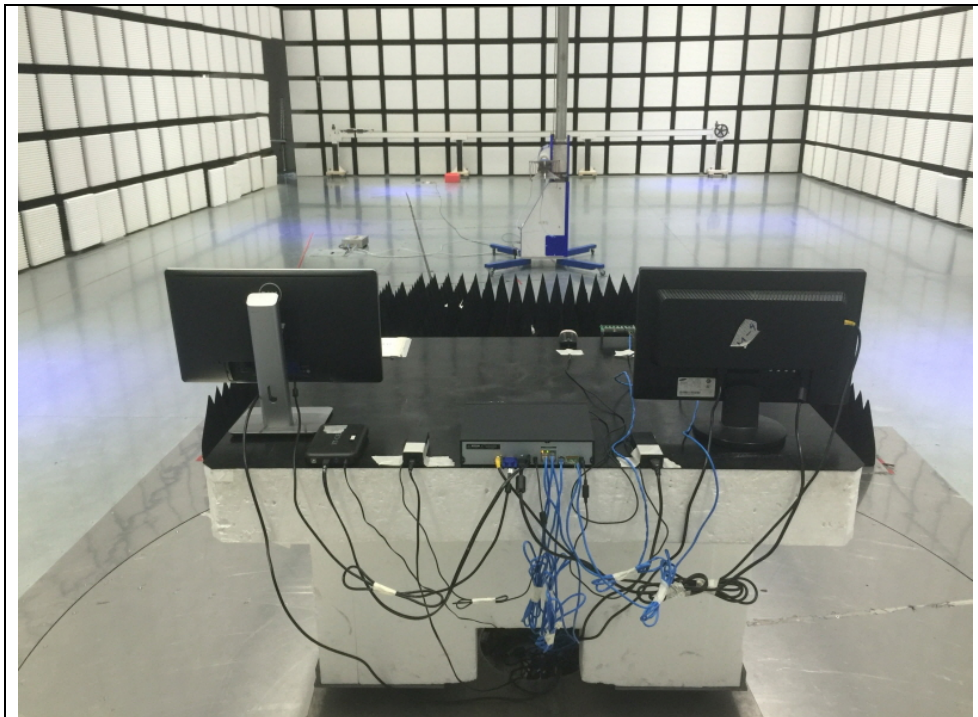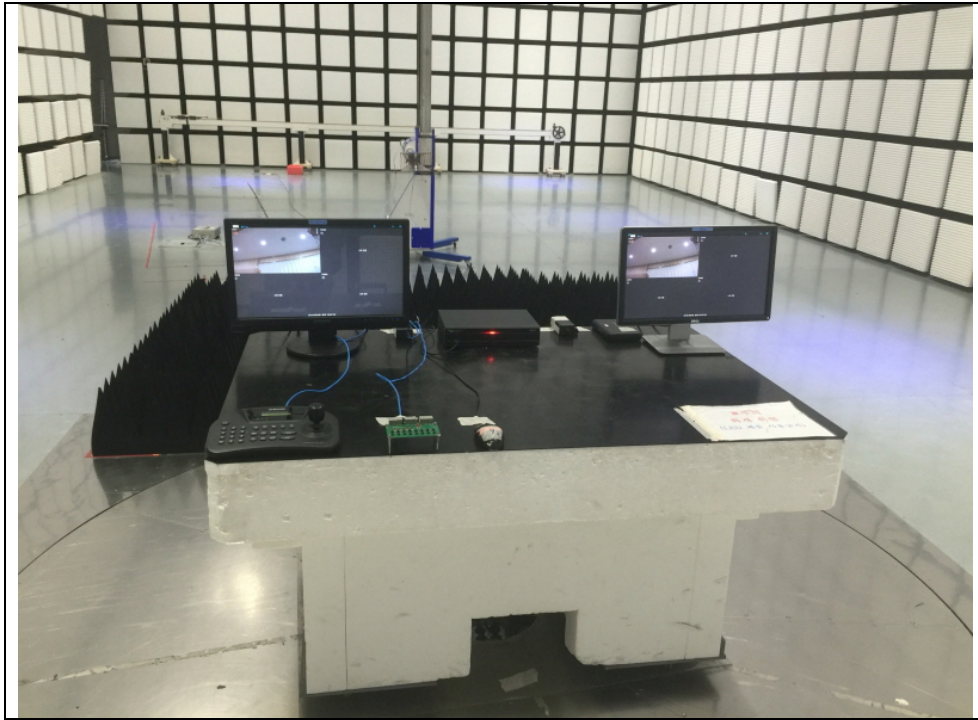

6.2.4 Radiated emission measurement result

\* Graph and Data

\* 30 MHz ~ 1 GHz (DR-2304P)(AC/DC Adaptor#1, #2)

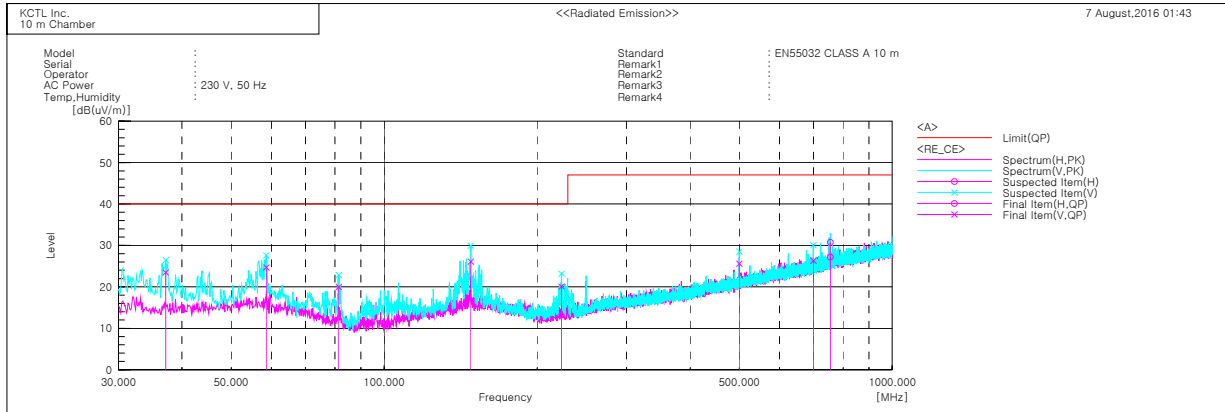


Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c. f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]
1	37.154	V	41.9	-18.4	23.5	40.0	16.5	100.0	62.5
2	58.615	V	42.1	-17.4	24.7	40.0	15.3	400.0	170.0
3	81.410	V	41.5	-21.5	20.0	40.0	20.0	100.0	224.5
4	148.098	V	42.9	-16.8	26.1	40.0	13.9	100.0	267.2
5	223.394	V	38.7	-18.6	20.1	40.0	19.9	300.0	116.8
6	499.965	V	35.2	-9.6	25.6	47.0	21.4	200.0	146.7
7	699.300	V	31.8	-5.5	26.3	47.0	20.7	100.0	44.3
8	755.924	H	31.5	-4.3	27.2	47.0	19.8	300.0	26.0



\* 1 GHz ~ 6 GHz (DR-2304P)(AC/DC Adaptor#1, #2)

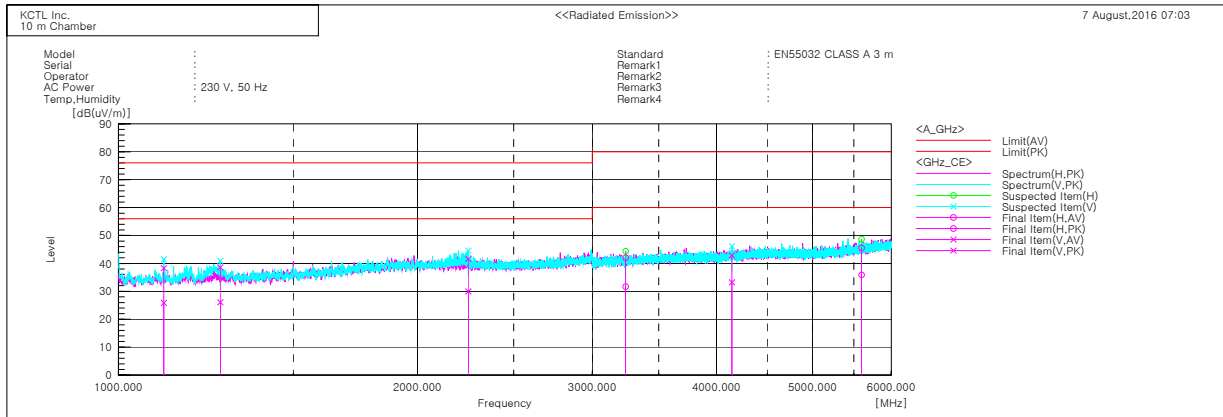

Final Result

No.	Frequency [MHz]	(P)	Reading AV [dB(uV)]	Reading PK [dB(uV)]	c. f [dB(1/m)]	Result AV [dB(uV/m)]	Result PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Margin AV [dB]	Margin PK [dB]	Height [cm]	Angle [deg]
1	1110.625	V	38.4	50.8	-12.5	25.9	38.3	56.0	76.0	30.1	37.7	100.0	32.1
2	1266.250	V	37.6	50.1	-11.5	26.1	38.6	56.0	76.0	29.9	37.4	100.0	0.2
3	2250.625	V	35.1	46.7	-5.1	30.0	41.6	56.0	76.0	26.0	34.4	100.0	32.1
4	3241.875	H	33.9	44.2	-2.2	31.7	42.0	60.0	80.0	28.3	38.0	100.0	220.2
5	4146.875	V	32.2	41.9	1.0	33.2	42.9	60.0	80.0	26.8	37.1	100.0	150.7
6	5601.250	H	31.7	41.3	4.2	35.9	45.5	60.0	80.0	24.1	34.5	100.0	146.3

### 6.3 Harmonics

Test specification	EN 61000-3-2:2014				
Testing voltage	230 V, 50 Hz				
Test facility	EMI Test area(6F)				
Date	2016. 08. 05				
Temperature(°C)	24.7 °C	Humidity (% R.H.)	42.6 % R.H.	Pressure (kPa)	100.1 kPa
Remarks	Pass				

#### 6.3.1 Measurement procedure

The equipment is supplied in series with shunt(s) R<sub>m</sub> or current transformer(s) from a source having the same nominal voltage and frequency as the rated supply voltage and frequency of the equipment. Measurements shall be made under normal load, or conditions for adequate heat discharge, and under normal operating conditions. User's operation controls or automatic programmers shall be set to produce the maximum harmonic component, for each successive harmonic component in turn. For the purpose of harmonic current limitation, equipment is classified as follows :

Class A : Equipment not specified in one of the three other Classes shall be considered as Class A equipment.

- Balanced three-phase equipment;
- Household appliances, excluding equipment identified as Class D;
- Tools, excluding portable tools;
- Dimmers for incandescent lamps;
- Audio equipment.

Class B : Portable tools; Arc welding equipment which is not professional equipment.

Class C : Lighting equipment.


Class D : Equipment having a specified power according to 6.2.2 less than or equal to 600 w, of the following types:

- Personal computers and personal computer monitors;
- Television receivers.
- Refrigerators and freezers having one or more variable-speed drives to control compressor motor(s).

#### 6.3.2 Used equipments


Equipment	Model no.	Serial no.	Makers	Next Cal. date	Used
Harmonics/Flicker meter (AC POWER SOURCE)	5001x-CTS -400-413	54894	C.I.	2017.03.16	<input checked="" type="checkbox"/>
Harmonics/Flicker meter (Analyzer)	PACS-1	72072	C.I.	2017.03.16	<input checked="" type="checkbox"/>

### 6.3.3 Photographs of test setup

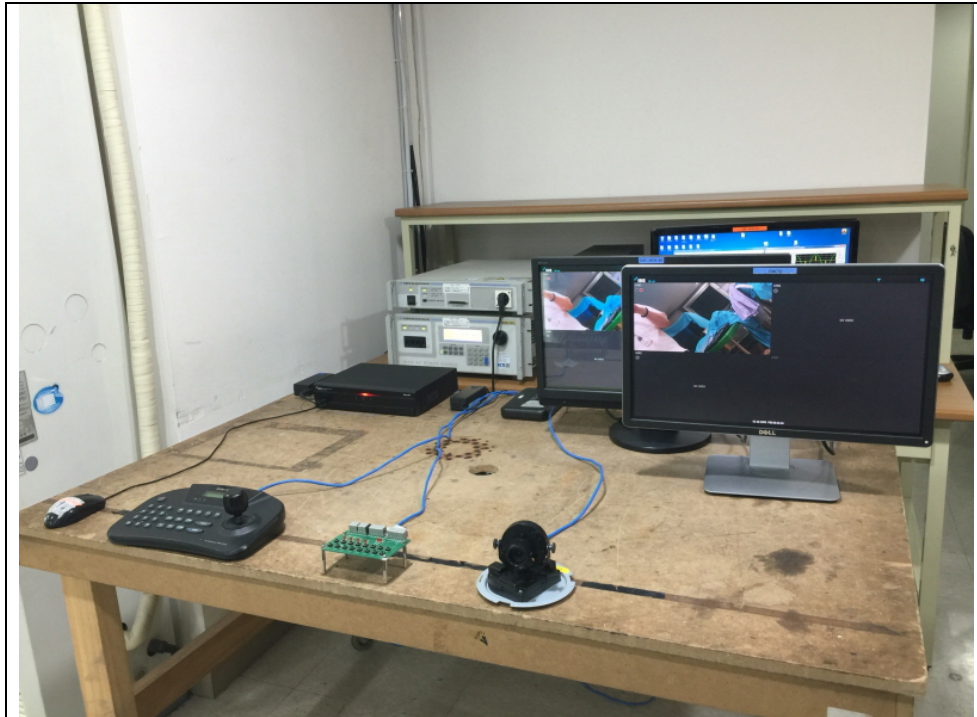

6.3.4 Measurement result

\* AC/DC Adaptor#1

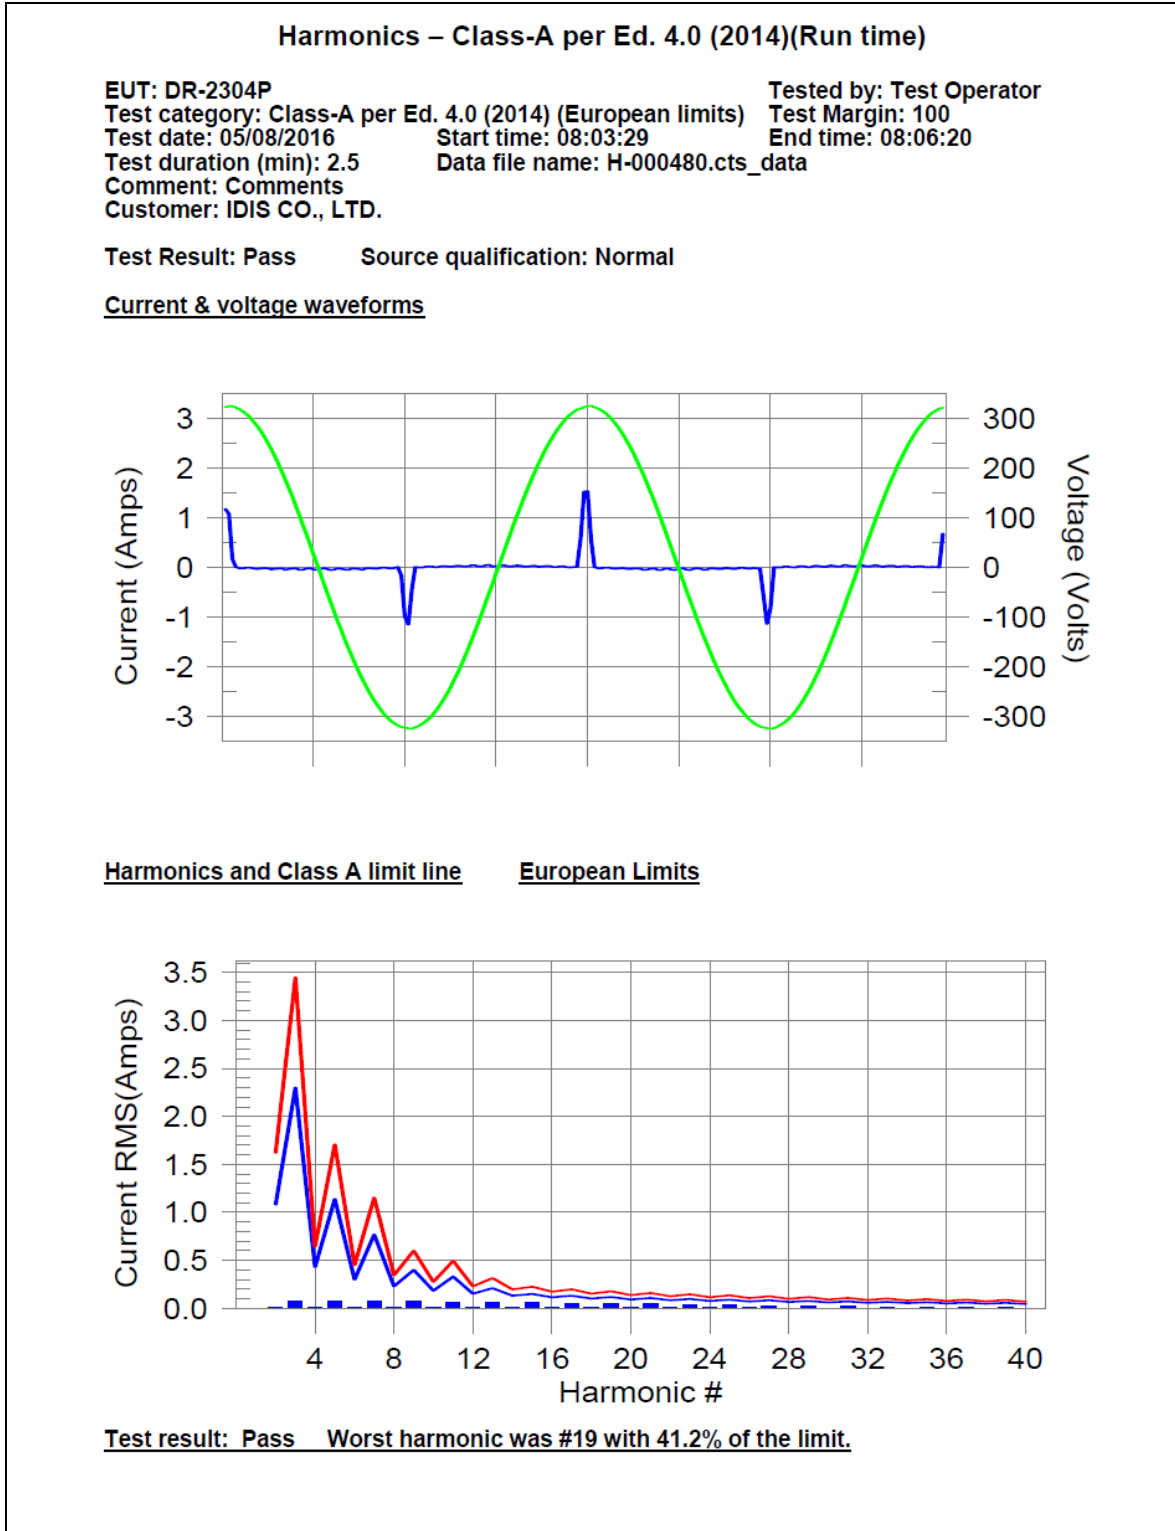

**Current Test Result Summary (Run time)**

EUT: DR-2304P  
 Test category: Class-A per Ed. 4.0 (2014) (European limits)  
 Test date: 05/08/2016  
 Test duration (min): 2.5  
 Comment: Comments  
 Customer: IDIS CO., LTD.

Tested by: Test Operator  
 Test Margin: 100  
 End time: 08:06:20

Start time: 08:03:29  
 Data file name: H-000480.cts\_data

Test Result: Pass Source qualification: Normal  
 THC(A): 0.212 I-THD(%): 264.6 POHC(A): 0.083 POHC Limit(A): 0.251  
 Highest parameter values during test:  
 V\_RMS (Volts): 229.49 Frequency(Hz): 50.00  
 I\_Peak (Amps): 1.719 I\_RMS (Amps): 0.242  
 I\_Fund (Amps): 0.082 Crest Factor: 7.330  
 Power (Watts): 17.8 Power Factor: 0.337

Harm#	Harms(avg)	100%Limit	%of Limit	Harms(max)	150%Limit	%of Limit	Status
2	0.004	1.080	N/A	0.005	1.620	N/A	Pass
3	0.076	2.300	3.3	0.077	3.450	2.2	Pass
4	0.004	0.430	N/A	0.005	0.645	N/A	Pass
5	0.074	1.140	6.5	0.076	1.710	4.4	Pass
6	0.004	0.300	N/A	0.005	0.450	N/A	Pass
7	0.072	0.770	9.3	0.073	1.155	6.4	Pass
8	0.004	0.230	N/A	0.005	0.345	N/A	Pass
9	0.069	0.400	17.3	0.071	0.600	11.8	Pass
10	0.004	0.184	N/A	0.005	0.276	N/A	Pass
11	0.066	0.330	20.0	0.067	0.495	13.6	Pass
12	0.004	0.153	N/A	0.005	0.230	N/A	Pass
13	0.062	0.210	29.6	0.063	0.315	20.1	Pass
14	0.004	0.131	N/A	0.005	0.197	N/A	Pass
15	0.058	0.150	38.7	0.059	0.225	26.3	Pass
16	0.004	0.115	N/A	0.005	0.173	N/A	Pass
17	0.054	0.132	40.5	0.054	0.198	27.5	Pass
18	0.004	0.102	N/A	0.005	0.153	N/A	Pass
19	0.049	0.118	41.2	0.050	0.178	27.9	Pass
20	0.004	0.092	N/A	0.004	0.138	N/A	Pass
21	0.044	0.107	41.0	0.044	0.161	27.7	Pass
22	0.004	0.084	N/A	0.004	0.125	N/A	Pass
23	0.039	0.098	39.8	0.039	0.147	26.8	Pass
24	0.003	0.077	N/A	0.004	0.115	N/A	Pass
25	0.034	0.090	37.7	0.034	0.135	25.4	Pass
26	0.003	0.071	N/A	0.004	0.107	N/A	Pass
27	0.029	0.083	34.9	0.029	0.125	23.5	Pass
28	0.003	0.066	N/A	0.003	0.099	N/A	Pass
29	0.024	0.078	31.5	0.025	0.116	21.1	Pass
30	0.003	0.061	N/A	0.003	0.092	N/A	Pass
31	0.020	0.073	27.6	0.020	0.109	18.5	Pass
32	0.002	0.058	N/A	0.002	0.086	N/A	Pass
33	0.016	0.068	23.4	0.016	0.102	15.7	Pass
34	0.002	0.054	N/A	0.002	0.081	N/A	Pass
35	0.012	0.064	19.0	0.012	0.096	12.8	Pass
36	0.001	0.051	N/A	0.002	0.077	N/A	Pass
37	0.009	0.061	14.6	0.009	0.091	9.9	Pass
38	0.001	0.048	N/A	0.001	0.073	N/A	Pass
39	0.006	0.058	10.4	0.006	0.087	7.0	Pass
40	0.001	0.046	N/A	0.001	0.069	N/A	Pass

**Voltage Source Verification Data (Run time)**

EUT: DR-2304P Tested by: Test Operator  
 Test category: Class-A per Ed. 4.0 (2014) (European limits) Test Margin: 100  
 Test date: 05/08/2016 Start time: 08:03:29 End time: 08:06:20  
 Test duration (min): 2.5 Data file name: H-000480.cts\_data  
 Comment: Comments  
 Customer: IDIS CO., LTD.

Test Result: Pass Source qualification: Normal

Highest parameter values during test:

Voltage (Vrms): 229.49	Frequency(Hz): 50.00
I_Peak (Amps): 1.719	I_RMS (Amps): 0.242
I_Fund (Amps): 0.082	Crest Factor: 7.330
Power (Watts): 17.8	Power Factor: 0.337

Harm#	Harmonics V-rms	Limit V-rms	% of Limit	Status
2	0.100	0.459	21.75	OK
3	0.526	2.065	25.45	OK
4	0.025	0.459	5.49	OK
5	0.013	0.918	1.42	OK
6	0.026	0.459	5.68	OK
7	0.026	0.688	3.83	OK
8	0.019	0.459	4.20	OK
9	0.041	0.459	8.84	OK
10	0.007	0.459	1.56	OK
11	0.039	0.229	16.96	OK
12	0.016	0.229	7.04	OK
13	0.058	0.229	25.24	OK
14	0.008	0.229	3.35	OK
15	0.049	0.229	21.23	OK
16	0.011	0.229	4.83	OK
17	0.050	0.229	21.97	OK
18	0.015	0.229	6.54	OK
19	0.054	0.229	23.39	OK
20	0.007	0.229	3.18	OK
21	0.049	0.229	21.27	OK
22	0.008	0.229	3.59	OK
23	0.046	0.229	20.10	OK
24	0.009	0.229	3.96	OK
25	0.045	0.229	19.53	OK
26	0.010	0.229	4.18	OK
27	0.041	0.229	17.78	OK
28	0.008	0.229	3.36	OK
29	0.038	0.229	16.39	OK
30	0.013	0.229	5.55	OK
31	0.036	0.229	15.85	OK
32	0.006	0.229	2.51	OK
33	0.033	0.229	14.42	OK
34	0.011	0.229	4.90	OK
35	0.028	0.229	12.26	OK
36	0.011	0.229	4.84	OK
37	0.023	0.229	10.07	OK
38	0.005	0.229	2.14	OK
39	0.012	0.229	5.02	OK
40	0.006	0.229	2.76	OK



\* AC/DC Adaptor#2


**Harmonics – Class-A per Ed. 4.0 (2014)(Run time)**

EUT: DR-2304P  
 Test category: Class-A per Ed. 4.0 (2014) (European limits)  
 Test date: 05/08/2016  
 Test duration (min): 2.5  
 Comment: Comments  
 Customer: IDIS CO., LTD.


Tested by: Test Operator  
 Test Margin: 100  
 End time: 08:34:32  
 Start time: 08:31:41  
 Data file name: H-000483.cts\_data

Test Result: Pass Source qualification: Normal

Current & voltage waveforms

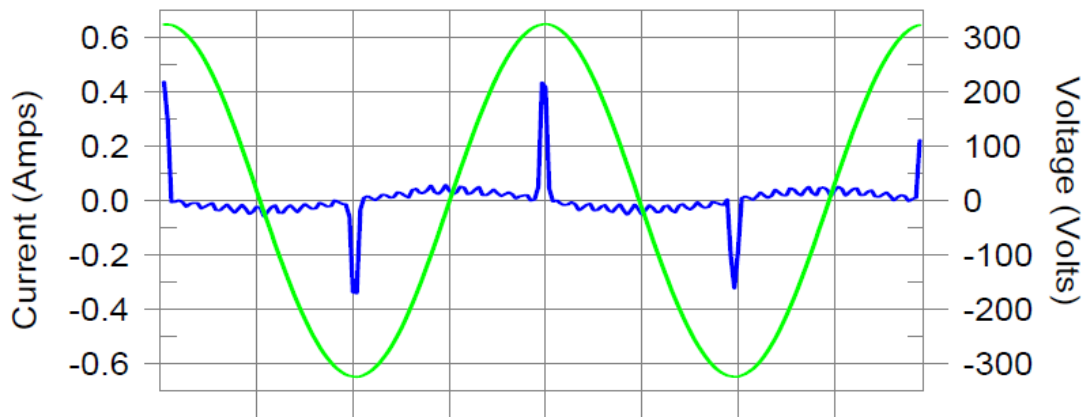

Harmonics and Class A limit line      European Limits

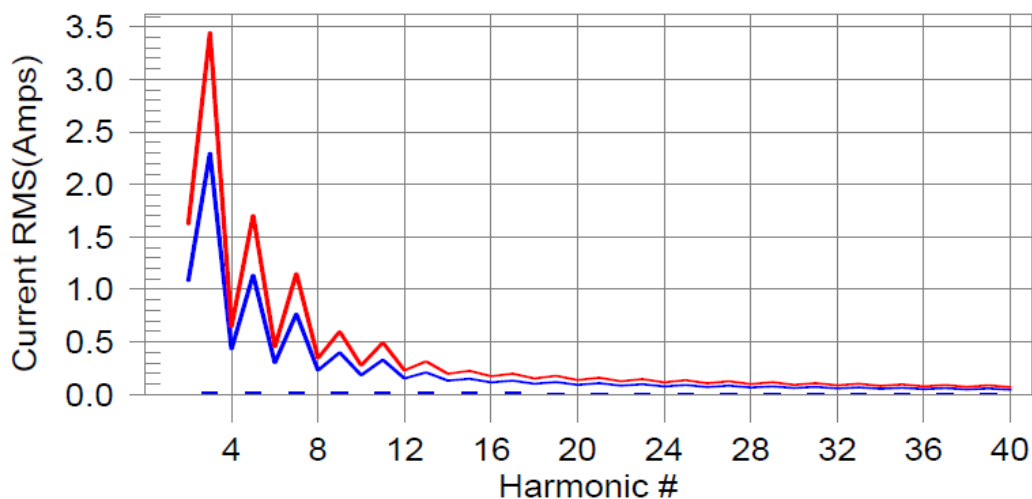

Test result: Pass Worst harmonic was #21 with 13.8% of the limit.



**Current Test Result Summary (Run time)**

EUT: DR-2304P Tested by: Test Operator  
 Test category: Class-A per Ed. 4.0 (2014) (European limits) Test Margin: 100  
 Test date: 05/08/2016 Start time: 08:31:41 End time: 08:34:32  
 Test duration (min): 2.5 Data file name: H-000483.cts\_data  
 Comment: Comments  
 Customer: IDIS CO., LTD.

Test Result: Pass Source qualification: Normal  
 THC(A): 0.068 I-THD(%): 202.9 POHC(A): 0.030 POHC Limit(A): 0.251

Highest parameter values during test:

V_RMS (Volts): 229.48	Frequency(Hz): 50.00
I_Peak (Amps): 0.505	I_RMS (Amps): 0.077
I_Fund (Amps): 0.034	Crest Factor: 6.545
Power (Watts): 5.3	Power Factor: 0.302

Harm#	Harms(avg)	100%Limit	%of Limit	Harms(max)	150%Limit	%of Limit	Status
2	0.002	1.080	N/A	0.002	1.620	N/A	Pass
3	0.023	2.300	1.0	0.023	3.450	0.7	Pass
4	0.002	0.430	N/A	0.002	0.645	N/A	Pass
5	0.023	1.140	2.0	0.023	1.710	1.3	Pass
6	0.002	0.300	N/A	0.002	0.450	N/A	Pass
7	0.022	0.770	2.9	0.022	1.155	1.9	Pass
8	0.002	0.230	N/A	0.002	0.345	N/A	Pass
9	0.021	0.400	5.3	0.021	0.600	3.6	Pass
10	0.002	0.184	N/A	0.002	0.276	N/A	Pass
11	0.021	0.330	6.2	0.021	0.495	4.2	Pass
12	0.002	0.153	N/A	0.002	0.230	N/A	Pass
13	0.020	0.210	9.3	0.020	0.315	6.2	Pass
14	0.002	0.131	N/A	0.002	0.197	N/A	Pass
15	0.019	0.150	12.3	0.019	0.225	8.3	Pass
16	0.002	0.115	N/A	0.002	0.173	N/A	Pass
17	0.017	0.132	13.1	0.017	0.198	8.8	Pass
18	0.001	0.102	N/A	0.002	0.153	N/A	Pass
19	0.016	0.118	13.6	0.016	0.178	9.1	Pass
20	0.001	0.092	N/A	0.002	0.138	N/A	Pass
21	0.015	0.107	13.8	0.015	0.161	9.3	Pass
22	0.001	0.084	N/A	0.001	0.125	N/A	Pass
23	0.013	0.098	13.7	0.014	0.147	9.2	Pass
24	0.001	0.077	N/A	0.001	0.115	N/A	Pass
25	0.012	0.090	13.4	0.012	0.135	9.0	Pass
26	0.001	0.071	N/A	0.001	0.107	N/A	Pass
27	0.011	0.083	12.9	0.011	0.125	8.7	Pass
28	0.001	0.066	N/A	0.001	0.099	N/A	Pass
29	0.009	0.078	12.1	0.010	0.116	8.2	Pass
30	0.001	0.061	N/A	0.001	0.092	N/A	Pass
31	0.008	0.073	11.1	0.008	0.109	7.6	Pass
32	0.001	0.058	N/A	0.001	0.086	N/A	Pass
33	0.007	0.068	10.0	0.007	0.102	6.8	Pass
34	0.001	0.054	N/A	0.001	0.081	N/A	Pass
35	0.006	0.064	8.8	0.006	0.096	6.0	Pass
36	0.001	0.051	N/A	0.001	0.077	N/A	Pass
37	0.005	0.061	N/A	0.005	0.091	N/A	Pass
38	0.001	0.048	N/A	0.001	0.073	N/A	Pass
39	0.003	0.058	N/A	0.004	0.087	N/A	Pass
40	0.000	0.046	N/A	0.001	0.069	N/A	Pass

**Voltage Source Verification Data (Run time)**

EUT: DR-2304P  
 Test category: Class-A per Ed. 4.0 (2014) (European limits)  
 Test date: 05/08/2016  
 Test duration (min): 2.5  
 Comment: Comments  
 Customer: IDIS CO., LTD.

Tested by: Test Operator  
 Test Margin: 100  
 Start time: 08:31:41  
 End time: 08:34:32

Data file name: H-000483.cts\_data

Test Result: Pass      Source qualification: Normal

Highest parameter values during test:

Voltage (Vrms): 229.48      Frequency(Hz): 50.00  
 I\_Peak (Amps): 0.505      I\_RMS (Amps): 0.077  
 I\_Fund (Amps): 0.034      Crest Factor: 6.545  
 Power (Watts): 5.3      Power Factor: 0.302

Harm#	Harmonics V-rms	Limit V-rms	% of Limit	Status
2	0.102	0.459	22.31	OK
3	0.512	2.065	24.79	OK
4	0.023	0.459	5.01	OK
5	0.017	0.918	1.83	OK
6	0.026	0.459	5.70	OK
7	0.013	0.688	1.95	OK
8	0.018	0.459	4.01	OK
9	0.019	0.459	4.11	OK
10	0.008	0.459	1.68	OK
11	0.018	0.229	7.86	OK
12	0.016	0.229	6.77	OK
13	0.032	0.229	13.78	OK
14	0.007	0.229	3.09	OK
15	0.015	0.229	6.57	OK
16	0.011	0.229	4.67	OK
17	0.020	0.229	8.63	OK
18	0.014	0.229	6.05	OK
19	0.022	0.229	9.67	OK
20	0.005	0.229	2.25	OK
21	0.021	0.229	9.00	OK
22	0.006	0.229	2.82	OK
23	0.017	0.229	7.60	OK
24	0.006	0.229	2.80	OK
25	0.022	0.229	9.79	OK
26	0.009	0.229	3.95	OK
27	0.020	0.229	8.70	OK
28	0.007	0.229	3.26	OK
29	0.022	0.229	9.66	OK
30	0.011	0.229	4.68	OK
31	0.021	0.229	9.31	OK
32	0.005	0.229	2.10	OK
33	0.022	0.229	9.55	OK
34	0.009	0.229	4.03	OK
35	0.019	0.229	8.22	OK
36	0.011	0.229	4.75	OK
37	0.018	0.229	7.87	OK
38	0.005	0.229	1.99	OK
39	0.005	0.229	2.28	OK
40	0.008	0.229	3.42	OK

## 6.4 Flicker

Test specification	EN 61000-3-3:2013				
Testing voltage	230 V, 50 Hz				
Test facility	EMI Test area(6F)				
Date	2016. 08. 05				
Temperature(°C)	24.7 °C	Humidity (% R.H.)	42.6 % R.H.	Pressure (kPa)	100.1 kPa
Remarks	Pass				

### 6.4.1 Measurement procedure

EUT was connected to the power analyzer system.

Measurement was performed to obtain the desired flicker parameters.

The measuring time depends on which parameters are to be measured.

$$P_{lr} = 2 \text{ h}$$


$$P_{sr} = 10 \text{ min}$$

Controls and automatic programs shall be set to produce the most unfavorable sequence of voltage changes, using only those combinations of controls and programs are mentioned by the manufacturer in the instruction manual.

### 6.4.2 Used equipments


Equipment	Model no.	Serial no.	Makers	Next Cal. date	Used
Harmonics/Flicker meter (AC POWER SOURCE)	5001x-CTS -400-413	54894	C.I.	2017.03.16	<input checked="" type="checkbox"/>
Harmonics/Flicker meter (Analyzer)	PACS-1	72072	C.I.	2017.03.16	<input checked="" type="checkbox"/>

### 6.4.3 Photographs of test setup

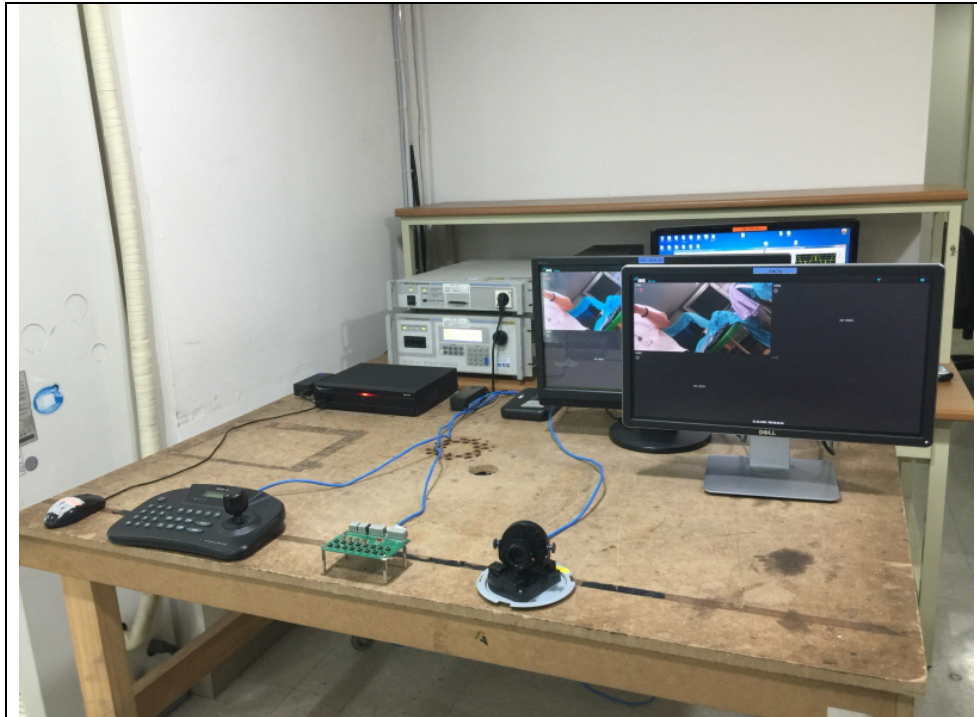


6.4.4 Measurement result

\* AC/DC Adaptor#1

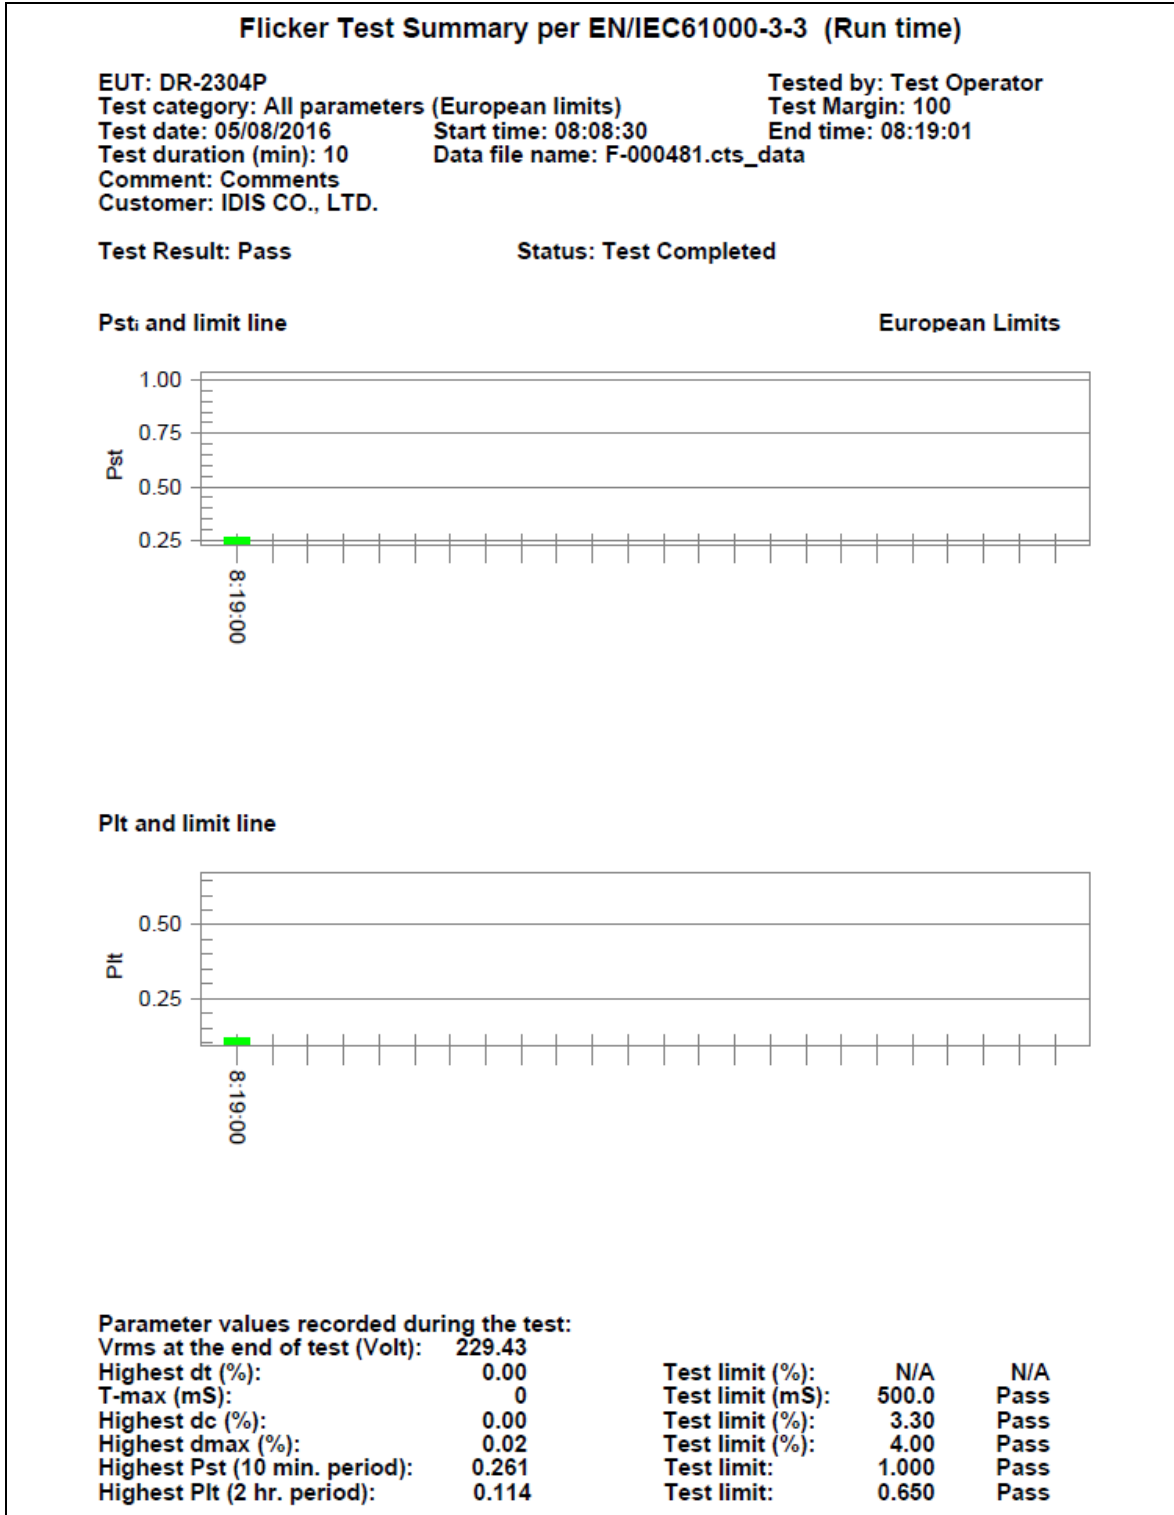

\* AC/DC Adaptor#2

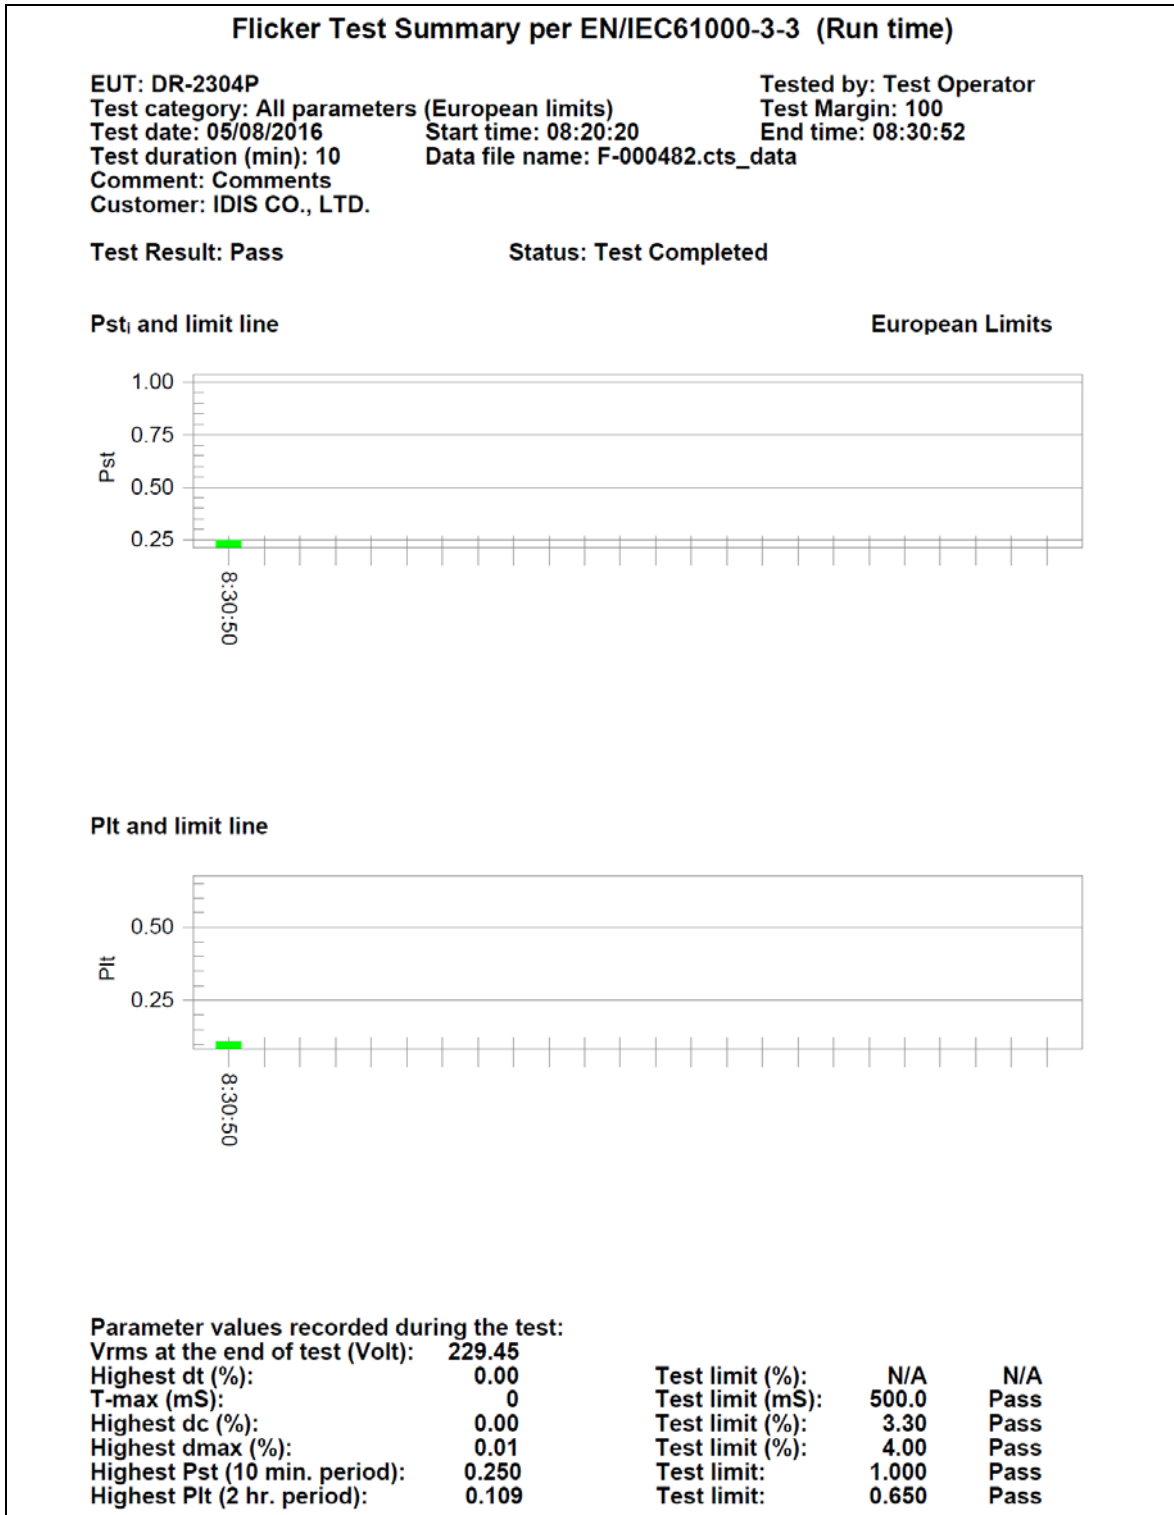



## 6.5 Electrostatic Discharge

Test specification	EN 61000-4-2:2009				
Test level	<input checked="" type="checkbox"/> Contact: $\pm 6$ kV <input checked="" type="checkbox"/> Air: $\pm 2$ kV, $\pm 4$ kV, $\pm 8$ kV <input checked="" type="checkbox"/> HCP: $\pm 6$ kV <input checked="" type="checkbox"/> VCP: $\pm 6$ kV				
Discharge impedance	330 $\Omega$ / 150 pF				
Number of discharge (Each polarity)	<input checked="" type="checkbox"/> Contact: 10 <input checked="" type="checkbox"/> Air: 10 <input checked="" type="checkbox"/> HCP / VCP: 10				
Interval between discharges	1 s				
Testing voltage	230 V, 50 Hz				
Test facility	Shielded room (3F)				
Date	2016. 08. 04				
Temperature ( $^{\circ}$ C)	25.4 $^{\circ}$ C	Humidity (% R.H.)	42.1 % R.H.	Pressure (kPa)	100.9 kPa
Remarks	Pass -There shall be no damage, malfunction or change of status due to the conditioning. Flickering of an indicator during the conditioning is permissible, providing that there is no residual change in the EUT or any change in outputs.				

### 6.5.1 Measurement procedure

A ground reference plane was located on the floor, and connected to earth via a low Impedance connection. The return cable of the ESD generator was connected to the reference plane.

In case of floor standing equipment, EUT was placed on the reference plane on 0.1 m of insulating Support. In case of table top equipment, EUT was placed on a wooden table 0.8 m above the reference grounded floor. A horizontal coupling plane (HCP) was placed on the table, and Connected to the reference plane via a 470 k $\Omega$  resistor located in each end (0.5 mm insulating support between EUT and HCP). In both cases a vertical coupling plane(VCP) OF 0.5 X 0.5 m was located 0.1 m from the EUT's sides. The VCP was connected to the reference plane in the same matter as the HCP.



### 6.5.2 Used equipments



Equipment	Model No.	Serial No.	Makers	Next Cal. Date	Used
ESD Tester	PESD-1600	H011 309	HAEFELY	2017.05.10	<input checked="" type="checkbox"/>
ESD Tester	NSG 437	182	TESEQ	2017.04.26	<input type="checkbox"/>
HCP	-	-	-	-	<input checked="" type="checkbox"/>
VCP	-	-	-	-	<input checked="" type="checkbox"/>



### 6.5.3 Photographs of test setup



6.5.4 Measurement result

Electrostatic Discharge (Test Point)

Air discharge	
Contact discharge	

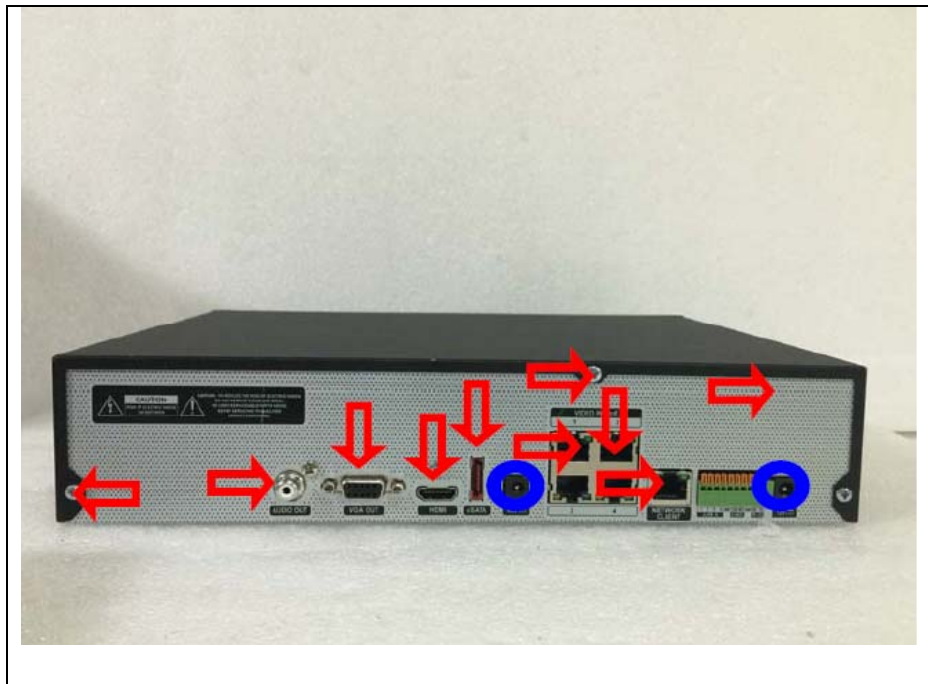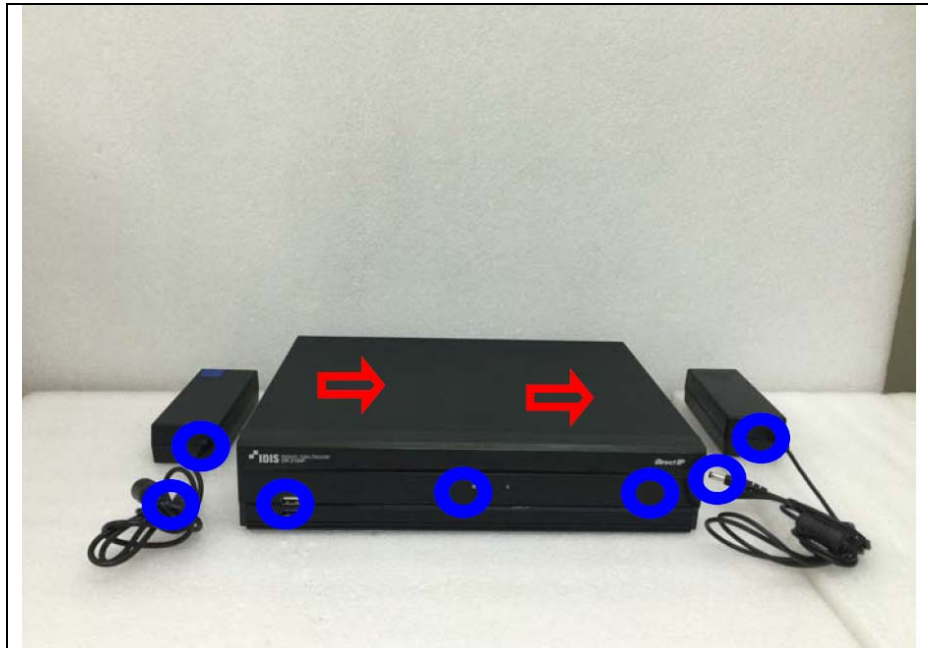



(AC/DC Adaptor#1, #2)

**HCP/VCP discharge**

Location(EUT)	Applied level ( $\pm$ )	Result
HCP (All 4 sides)	$\pm 6$ kV	Pass
VCP (All 4 sides)	$\pm 6$ kV	Pass

**Contact discharge**

Location(EUT)	Applied level ( $\pm$ )	Result
Front	$\pm 6$ kV	Pass
Rear	$\pm 6$ kV	Pass
Left	$\pm 6$ kV	Pass
Right	$\pm 6$ kV	Pass

**Air discharge**

Location(EUT)	Applied level ( $\pm$ )	Result
Front	$\pm 2$ kV, $\pm 4$ kV, $\pm 8$ kV	Pass
Rear	$\pm 2$ kV, $\pm 4$ kV, $\pm 8$ kV	Pass
Left	$\pm 2$ kV, $\pm 4$ kV, $\pm 8$ kV	-
Right	$\pm 2$ kV, $\pm 4$ kV, $\pm 8$ kV	-

## 6.6 Radio Frequency Electromagnetic Fields

Test specification	EN 61000-4-3:2006+A2:2010				
Tested frequency	80 MHz ~ 1 GHz, 1 GHz ~ 2.7 GHz				
Test level & Modulation	1 V/m, 3 V/m, 10 V/m, 80 % Amplitude Modulation (1 kHz) 1 V/m, 3 V/m, 10 V/m, Pulse Modulation (1 Hz (0.5 s ON: 0.5 s OFF))				
Frequency Step	1 % step				
Dwell time	1 s				
Distance	3 m from EUT to tip of antenna				
Testing voltage	230 V, 50 Hz				
Test facility	6F Fully anechoic chamber (3 m)				
Date	2016. 08. 10				
Temperature (°C)	26.7 °C	Humidity (% R.H.)	41.5 % R.H.	Pressure (kPa)	100.4 kPa
Remarks	Pass -There shall be no damage, malfunction or change of status due to the conditioning. Flickering of an indicator during the conditioning is permissible, providing that there is no residual change in the EUT or any change in outputs.				

### 6.6.1 Measurement procedure

The test was performed at 3 m full anechoic chamber.

For floor standing equipment, the EUT was standing on the floor.

For tabletop equipment, the EUT was located on a wooden table 0.8 m above the floor.


The EUT was tested all sides, horizontal and vertical polarization.



### 6.6.2 Used equipments

Equipment	Model no.	Serial no.	Makers	Next Cal. date	Used
Power meter	PM2002	302852	AR	2016.09.03	<input checked="" type="checkbox"/>
Power sensor	PH2000	303224	AR	2016.09.03	<input checked="" type="checkbox"/>
Power sensor	PH2000	311217	AR	2016.09.03	<input checked="" type="checkbox"/>
Directional coupler	DC6180	303976	AR	2016.09.03	<input checked="" type="checkbox"/>
Directional coupler	DC7144M1	320279	AR	2016.09.03	<input checked="" type="checkbox"/>
Signal generator	E4421B	GB40052295	AGILENT	2016.09.03	<input checked="" type="checkbox"/>
Broadband Amplifier	BBA100	100996-1	R&S	-	<input checked="" type="checkbox"/>
Amplifier	60S1G3M2	320444	AR	-	<input checked="" type="checkbox"/>
Log Periodic Dipole Antenna	LPDA-0803	130269	ETS	-	<input checked="" type="checkbox"/>
Antenna master	-	-	ETS	-	<input checked="" type="checkbox"/>

### 6.6.3 Photographs of test setup

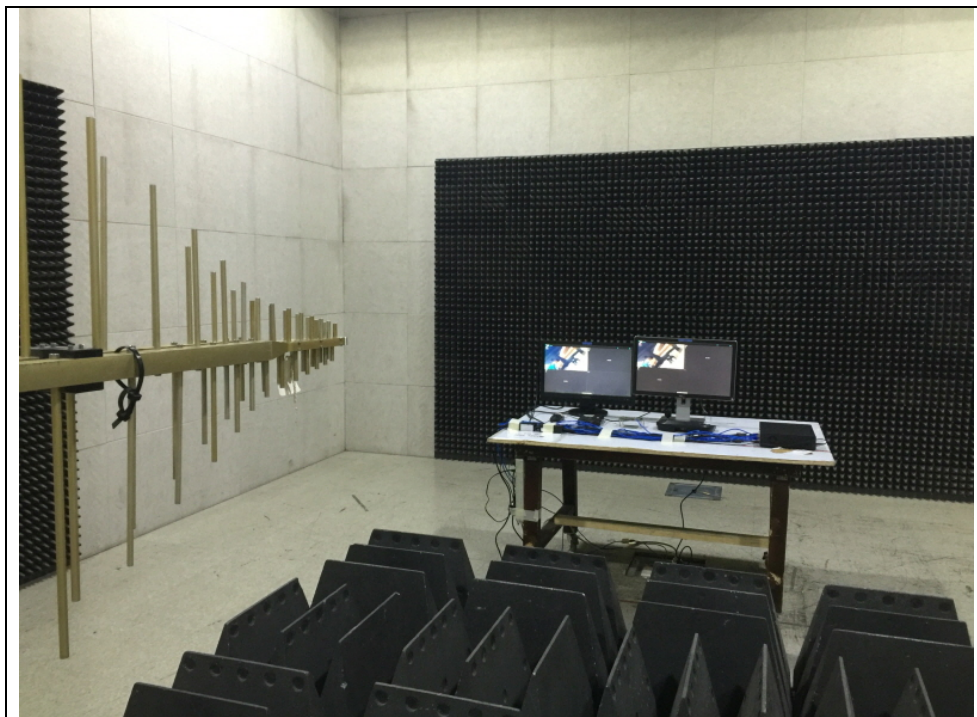

6.6.4 Measurement result

(AC/DC Adaptor#1, #2)

Location(EUT)	Antenna polarization	Result
Front side	Horizontal	Pass
	Vertical	Pass
Rear side	Horizontal	Pass
	Vertical	Pass
Left side	Horizontal	Pass
	Vertical	Pass
Right side	Horizontal	Pass
	Vertical	Pass



## 6.7 Electrical Fast Transient/BURST

Test specification	EN 61000-4-4:2012				
Coupling	<input checked="" type="checkbox"/> AC main <input checked="" type="checkbox"/> Signal / Control: Clamp <input checked="" type="checkbox"/> Telecommunication: Clamp				
Test level	<input checked="" type="checkbox"/> AC main: $\pm 2$ kV Peak <input checked="" type="checkbox"/> Signal / Control: $\pm 1$ kV Peak <input checked="" type="checkbox"/> Telecommunication: $\pm 1$ kV Peak				
Repetition frequency	100 kHz, Tr/Th = 5 / 50 ns				
Coupling time (Minimum)	60 s				
Testing voltage	230 V, 50 Hz				
Test facility	Shielded room (6F)				
Date	2016. 08. 09				
Temperature(°C)	24.3 °C	Humidity (% R.H.)	45.1 % R.H.	Pressure (kPa)	99.6 kPa
Remarks	Pass -There shall be no damage, malfunction or change of status due to the conditioning. Flickering of an indicator during the conditioning is permissible, providing that there is no residual change in the EUT or any change in outputs.				


### 6.7.1 Measurement procedure

A ground reference plane was located on the floor.  
 EFT generator was connected to reference ground plane via low impedance connection.  
 For floor standing equipment, EUT was placed on a 0.1 m wooden table.  
 For tabletop equipment, EUT was placed on a 0.1 m above the ground reference plane.  
 Test generator and coupling/decoupling network was placed on, and bounded to, the ground reference plane. When using the coupling clamp, the minimum distance between the coupling plates and all other conductive surfaces, except the ground reference plane beneath the coupling clamp, Shall be 0.5 m.

### 6.5.2 Used equipments

Equipment	Model no.	Serial no.	Makers	Next Cal. date	Used
Ultra compact simulator	UCS 500-M6BS1	V0545100858	EM TEST	2017.04.07	<input type="checkbox"/>
Ultra compact simulator	UCS500M	0701-03	EM TEST	2016.09.01	<input checked="" type="checkbox"/>
Capacitive coupling clamp	-	0001	EM TEST	2016.09.03	<input checked="" type="checkbox"/>

6.7.3 Photographs of test setup

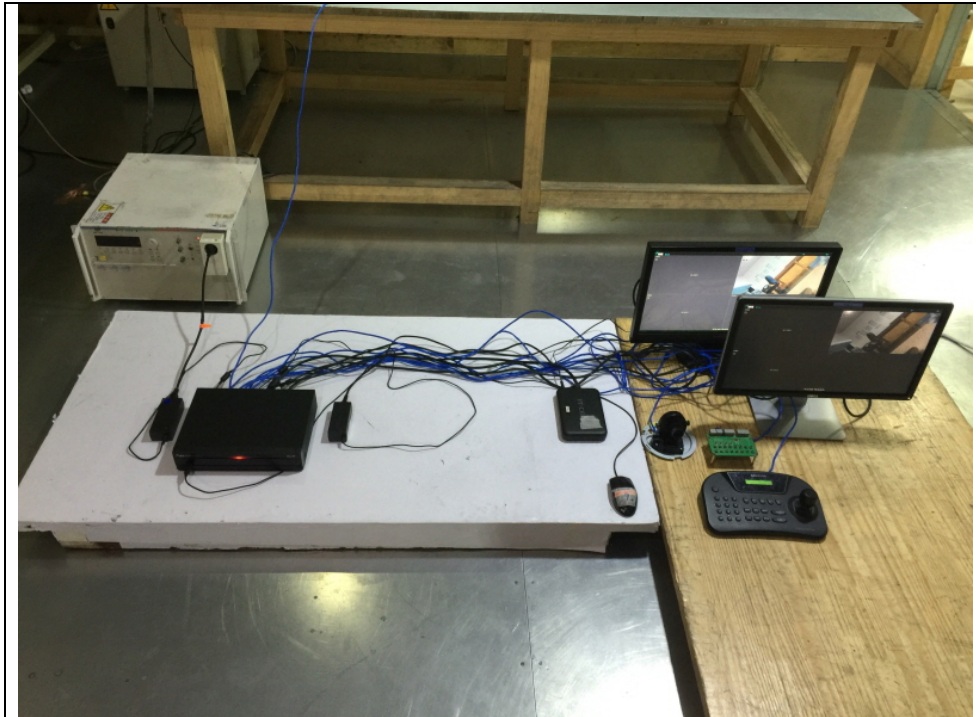

**6.7.4 Measurement result****\* AC main (AC/DC Adaptor#1)**

Coupling point	(+)	(-)	Result
L+N+PE	+ 2 kV	- 2 kV	Pass

**\* AC main (AC/DC Adaptor#2)**

Coupling point	(+)	(-)	Result
L+N	+ 2 kV	- 2 kV	Pass

**\* Signal / Control(AC/DC Adaptor#1, #2)**

Coupling point	(+)	(-)	Result
Audio Out	+ 1 kV	- 1 kV	Pass
Alarm In/Out	+ 1 kV	- 1 kV	Pass
RS232	+ 1 kV	- 1 kV	Pass

**\* Telecommunication(AC/DC Adaptor#1, #2)**

Coupling point	(+)	(-)	Result
LAN(RJ-45)	+ 1 kV	- 1 kV	Pass
PoE(RJ-45)	+ 1 kV	- 1 kV	Pass

## 6.8 Surge

Test specification	EN 61000-4-5:2014				
Coupling	<input checked="" type="checkbox"/> AC main: Direct <input checked="" type="checkbox"/> Signal / Control: CDN <input checked="" type="checkbox"/> Telecommunication: CDN				
Test level	<input checked="" type="checkbox"/> AC main: $\pm 0.5$ kV, $\pm 1$ kV, $\pm 2$ kV <input checked="" type="checkbox"/> Signal: $\pm 0.5$ kV, $\pm 1$ kV <input checked="" type="checkbox"/> Telecommunication: $\pm 0.5$ kV, $\pm 1$ kV				
Coupling Impedance	<input checked="" type="checkbox"/> Differential mode: $18 \mu\text{F}$ <input checked="" type="checkbox"/> $40 \Omega + 0.5 \mu\text{F}$		<input checked="" type="checkbox"/> Common mode: $10 \Omega + 9 \mu\text{F}$ <input type="checkbox"/> Direct		
Surge pulse shape	Tr/Th = 1.2 / 50 $\mu\text{s}$				
Angles	0°, 90°, 180°, 270°				
Number of surge	5				
Coupling time	30 s				
Testing voltage	230 V, 50 Hz				
Test facility	Shielded room (6F)				
Date	2016. 08. 09				
Temperature(°C)	24.3 °C	Humidity (% R.H.)	45.1 % R.H.	Pressure (kPa)	99.6 kPa
Remarks	Pass -There shall be no damage, malfunction or change of status due to the conditioning. Flickering of an indicator during the conditioning is permissible, providing that there is no residual change in the EUT or any change in outputs.				

### 6.8.1 Measurement procedure


A ground reference plane was located on the floor. SURGE generator was connected to reference ground plane via low impedance connection. For floor standing equipment & table top equipment, EUT was placed on a wooden table.

### 6.8.2 Used equipments

Equipment	Model no.	Serial no.	Makers	Next Cal. date	Used
Ultra compact simulator	UCS 500N5V	P1429136861	EM TEST	2016.09.03	<input checked="" type="checkbox"/>
CDN	CNV 508 N1	V1108108861	EM TEST	2016.09.02	<input checked="" type="checkbox"/>



6.8.3 Photographs of test setup

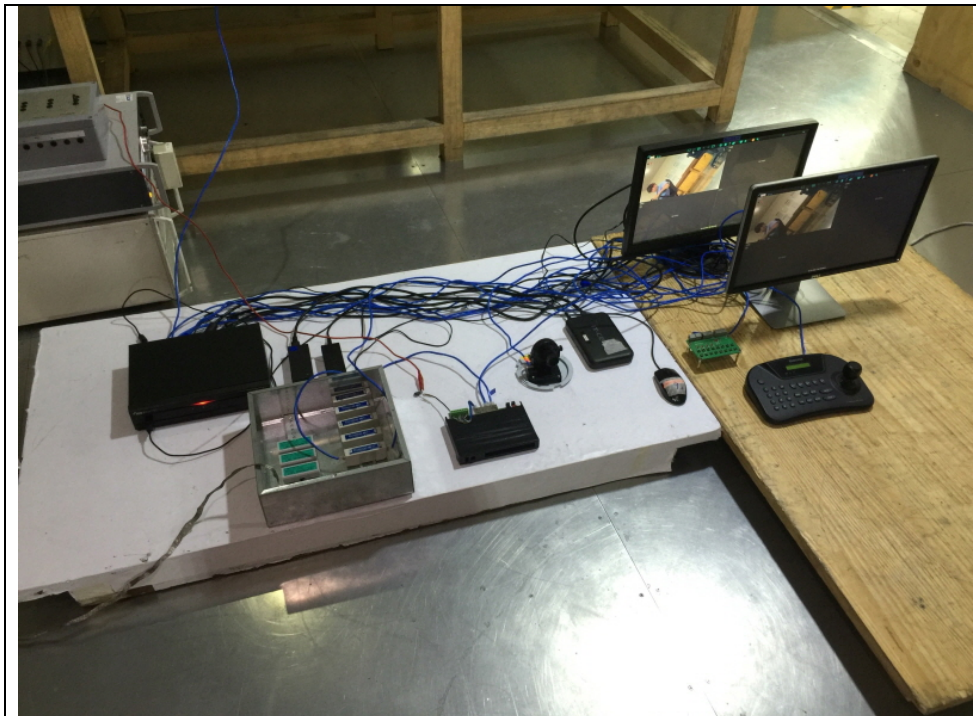

**6.8.4 Measurement result****\* AC main (AC/DC Adaptor#1)**

Coupling point	(+)	(-)	Result
L-N	+ 0.5 kV, + 1 kV	- 0.5 kV, - 1 kV	Pass
L-PE	+ 0.5 kV, + 1 kV, + 2 kV	- 0.5 kV, - 1 kV, - 2 kV	Pass
N-PE	+ 0.5 kV, + 1 kV, + 2 kV	- 0.5 kV, - 1 kV, - 2 kV	Pass

**\* AC main (AC/DC Adaptor#2)**

Coupling point	(+)	(-)	Result
L-N	+ 0.5 kV, + 1 kV	- 0.5 kV, - 1 kV	Pass

**\* Signal / Control (AC/DC Adaptor#1, #2)**

Coupling point	(+)	(-)	Result
Audio Out	+ 0.5 kV, + 1 kV	- 0.5 kV, - 1 kV	Pass
Alarm In/Out	+ 0.5 kV, + 1 kV	- 0.5 kV, - 1 kV	Pass
RS232	+ 0.5 kV, + 1 kV	- 0.5 kV, - 1 kV	Pass

**\* Telecommunication (AC/DC Adaptor#1, #2)**

Coupling point	(+)	(-)	Result
LAN(RJ-45)	+ 0.5 kV, + 1 kV	- 0.5 kV, - 1 kV	Pass
PoE(RJ-45)	+ 0.5 kV, + 1 kV	- 0.5 kV, - 1 kV	Pass

## 6.9 Conducted Immunity

Test specification	EN 61000-4-6:2014				
Tested frequency	0.15 MHz ~ 100 MHz				
Test level & Modulation	1 V, 3 V, 10 V, 80 % Amplitude Modulation (1 kHz) 1 V, 3 V, 10 V, Pulse Modulation (1 Hz (0.5 s ON: 0.5 s OFF))				
Frequency Step	1 % step				
Dwell time	1 s				
Coupling method	<input checked="" type="checkbox"/> AC main: CDN(M3), CDN(M2) <input checked="" type="checkbox"/> Signal / Control: Clamp, CDN(S1/75) <input checked="" type="checkbox"/> Telecommunication: CDN(T8-RJ45)				
Testing voltage	230 V, 50 Hz				
Test facility	Shielded room (6F)				
Date	2016. 08. 09				
Temperature(°C)	22.6 °C	Humidity (% R.H.)	44.7 % R.H.	Pressure (kPa)	100.3 kPa
Remarks	Pass -There shall be no damage, malfunction or change of status due to the conditioning. Flickering of an indicator during the conditioning is permissible, providing that there is no residual change in the EUT or any change in outputs.				

### 6.9.1 Measurement procedure

A ground reference plane was located on the floor.

The test was performed on a ground reference plane on a 0.1 m wooden table. This test were Performed using CDN for mains, clamp for signal and injection probe. The frequency range was swept from 0.15 MHz to 80 MHz. This frequency range was Modulated with 1 kHz sine wave at 80 %.

The signal generators provided the modulated frequency at a 1 % step size.

The power and all network cable, I/O cables longer than 3 m length were tested.




6.9.2 Used equipments

Equipment	Model no.	Serial no.	Makers	Next Cal. date	Used
POWER SENSOR	NRP-Z91	103183	R&S	2017.02.15	<input checked="" type="checkbox"/>
POWER SENSOR	NRP-Z91	103184	R&S	2017.02.15	<input checked="" type="checkbox"/>
CDN	CDN L-801 M2 / M3	2936	EM TEST	2016.09.03	<input checked="" type="checkbox"/>
CDN	CDN M2/M3	0906-12	EM TEST	2016.09.03	<input checked="" type="checkbox"/>
SIGNAL GENERATOR	SMC100A	105221	R&S	2017.08.02	<input checked="" type="checkbox"/>
COAXIAL FIXED ATTENUATOR	MU918	73-6-34	MCE/ WEINSCHEL	2017.08.02	<input checked="" type="checkbox"/>
BROADBAND AMPLIFIER	BBA150	101937	R&S	2017.02.15	<input checked="" type="checkbox"/>
CDN	CDN S1/75	0410-28	EM TEST	2017.02.29	<input checked="" type="checkbox"/>
CDN	CDN-T8-RJ45	0113-22	EM TEST	2016.09.03	<input checked="" type="checkbox"/>
EM Clamp	KEMZ 801	17643	Schaffner	2017.04.08	<input checked="" type="checkbox"/>

6.9.3 Photographs of test setup



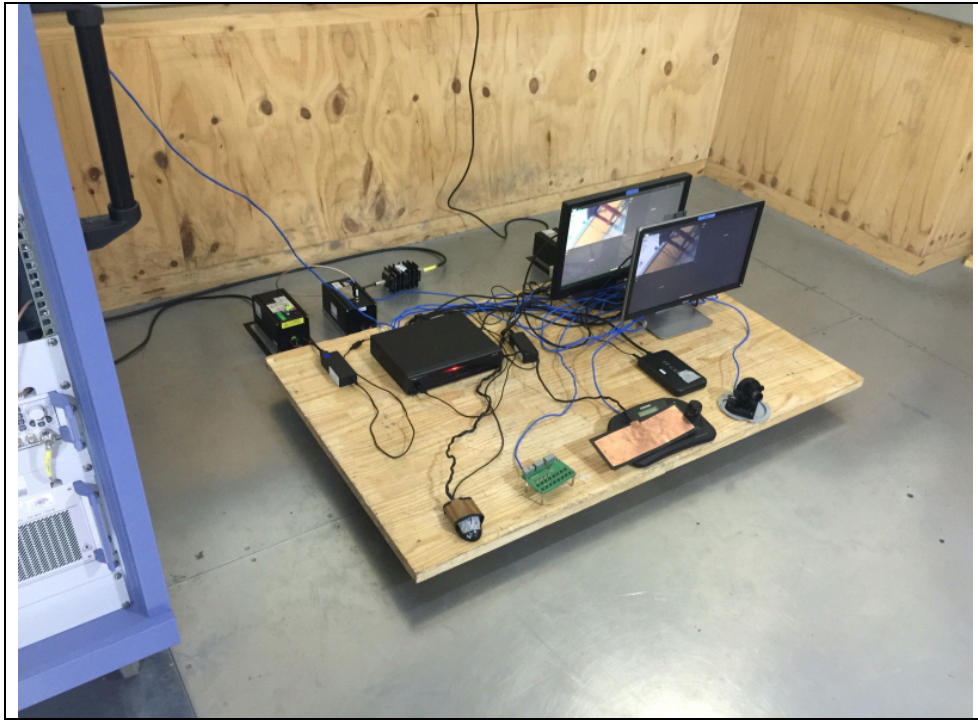

---

#### 6.9.4 Measurement result

\* AC main (AC/DC Adaptor#1)

Coupling point	Coupling method	Result
Power	CDN(M3)	Pass

\* AC main (AC/DC Adaptor#2)

Coupling point	Coupling method	Result
Power	CDN(M2)	Pass

\* Signal / Control (AC/DC Adaptor#1, #2)

Coupling point	Coupling method	Result
Audio Out	CDN(S1/75)	Pass
Alarm In/Out	Clamp	Pass
RS232	Clamp	Pass

\* Telecommunication (AC/DC Adaptor#1, #2)

Coupling point	Coupling method	Result
LAN(RJ-45)	CDN(T8-RJ45)	Pass
PoE(RJ-45)	CDN(T8-RJ45)	Pass

## 6.10 Dips and Interruptions

Test specification	EN 61000-4-11:2004				
Number of dips	3 T				
Duration	10 s				
Phase	Zero crossing (0 °)				
Testing voltage	100 V, 50/60 Hz / 240 V, 50/60 Hz				
Test facility	Shielded room (6F)				
Date	2016. 08. 09				
Temperature(°C)	24.3 °C	Humidity (% R.H.)	45.1 % R.H.	Pressure (kPa)	99.6 kPa
Remarks	Pass -There shall be no damage, malfunction or change of status due to the conditioning. Flickering of an indicator during the conditioning is permissible, providing that there is no residual change in the EUT or any change in outputs.				

### 6.10.1 Measurement procedure

The dips/interruption test is only applicable to AC mains.

The dips/interruptions were applied at zero crossing.

### 6.10.2 Used equipments

Equipment	Model no.	Serial no.	Makers	Next Cal. date	Used
Ultra compact simulator	UCS 500-M6BS1	V0545100858	EM TEST	2017.04.07	<input type="checkbox"/>
Ultra compact simulator	UCS500M	0701-03	EM TEST	2016.09.01	<input checked="" type="checkbox"/>

### 6.10.3 Photographs of test setup



### 6.10.4 Measurement result

\* 100 V, 50/60 Hz / 240 V, 50/60 Hz (AC/DC Adaptor#1, #2)

Test Level (%UT)	Dip/Int. (% UT)	Duration /Period	Phase (°)	Count number	Result
80 %	20%	250/300 Period <sup>(1)</sup>	0	3T	Pass
70 %	30 %	25/30 Period	0	3T	Pass
40 %	60 %	10/12 Period	0	3T	Pass
0%	100 %	250/300 Period <sup>(2)</sup>	0	3T	Note*

**Comment:**

- There was no change of operation status during above testing.

(250/300 Period<sup>(1)</sup>, 25/30 Period, 10/12 Period)

- Note\* (250/300 Period<sup>(2)</sup>)

The power of EUT is off during the test. After the test, EUT is getting back to normal operation.

It fully recorded using ancillary Power source equipment to content with Manufacturer`s set up manual. During the 250 period power loss, in accordance with the standard, a UPS was used to maintain full operation of the unit.

(AC/DC Adaptor#1, #2)



## 6.11 Mains supply voltage variations

Test specification	EN 50130-4:2011/A1:2014				
Supply voltage	$U_{nom} + 10\%$ , $U_{nom} - 15\%$				
Testing Voltage	100 V, 50/60 Hz / 240 V, 50/60 Hz				
Date	2016. 08. 09				
Temperature(°C)	24.3 °C	Humidity (% R.H.)	45.1 % R.H.	Pressure (kPa)	99.6 kPa
Remarks	Pass				

### 6.11.1 Used equipments

Equipment	Model no.	Serial no.	Makers	Next Cal. date	Used
Ultra compact simulator	UCS 500-M6BS1	V0545100858	EM TEST	2017.04.07	<input type="checkbox"/>
Ultra compact simulator	UCS500M	0701-03	EM TEST	2016.09.01	<input checked="" type="checkbox"/>

### 6.11.2 Measurement result

\* 100 V, 50/60 Hz (AC/DC Adaptor#1, #2)

Supply voltage		Result
+ 10 %	110 V	Pass
- 15 %	85 V	Pass

\* 240 V, 50/60 Hz (AC/DC Adaptor#1, #2)

Supply voltage		Result
+ 10 %	264 V	Pass
- 15 %	204 V	Pass

#### Comment:

- There was no change of operation status during above testing. (AC/DC Adaptor#1, #2)

## 7. E.U.T. photographs

### Front View



### Rear View






Left View




Right View



Top View

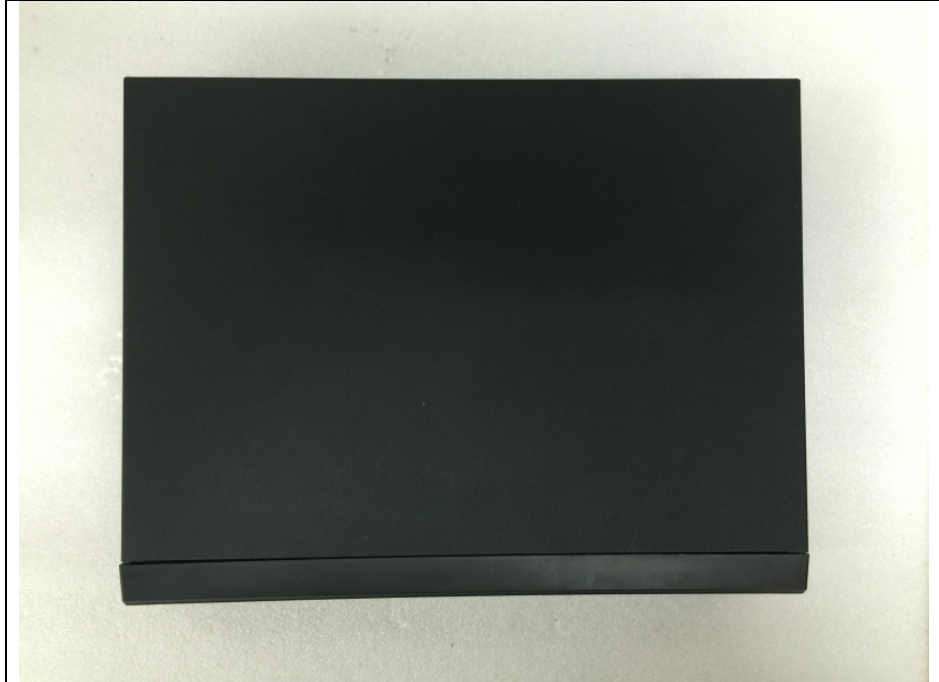

Bottom View

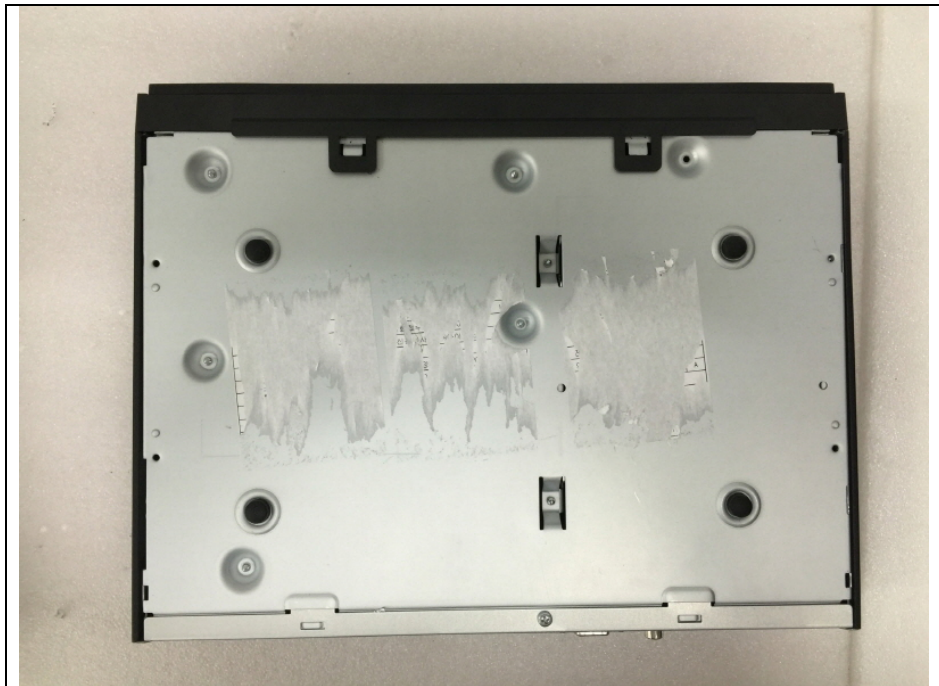


Inside






Main Board

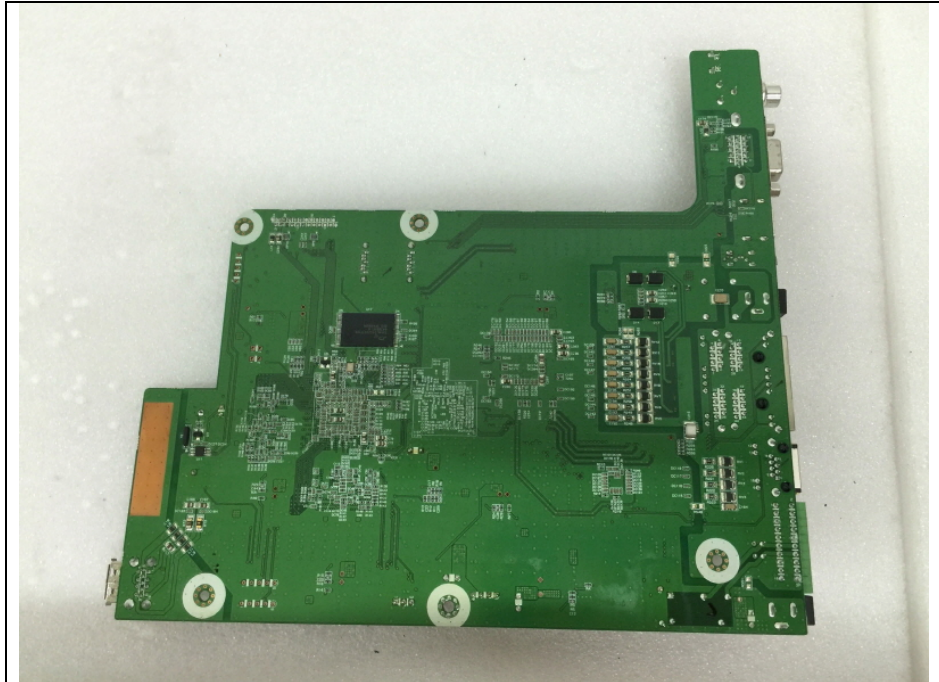


Front Board

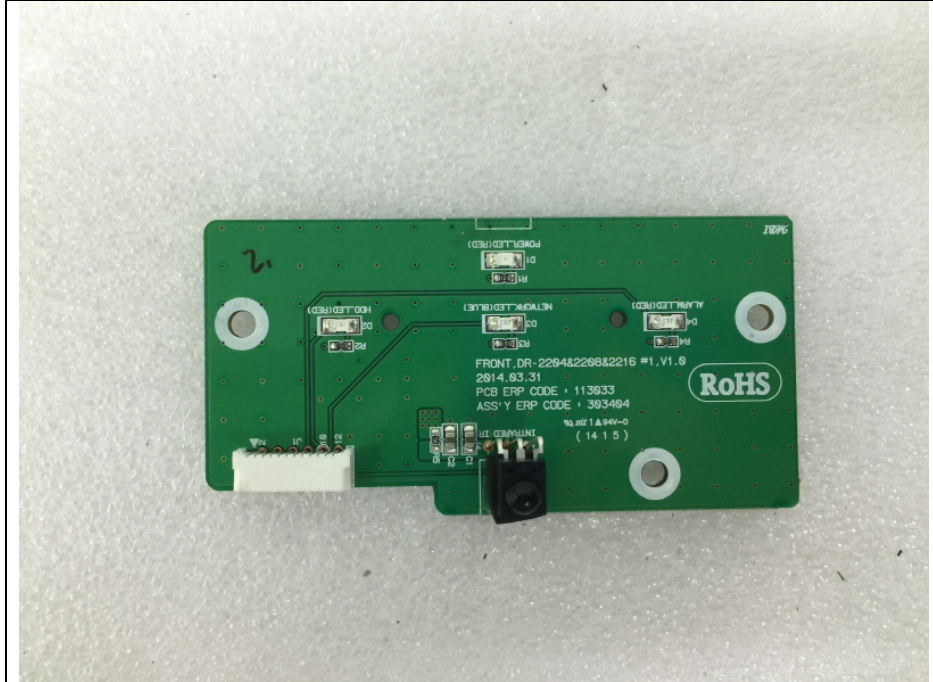



HDD(2000 GB)(2 EA)

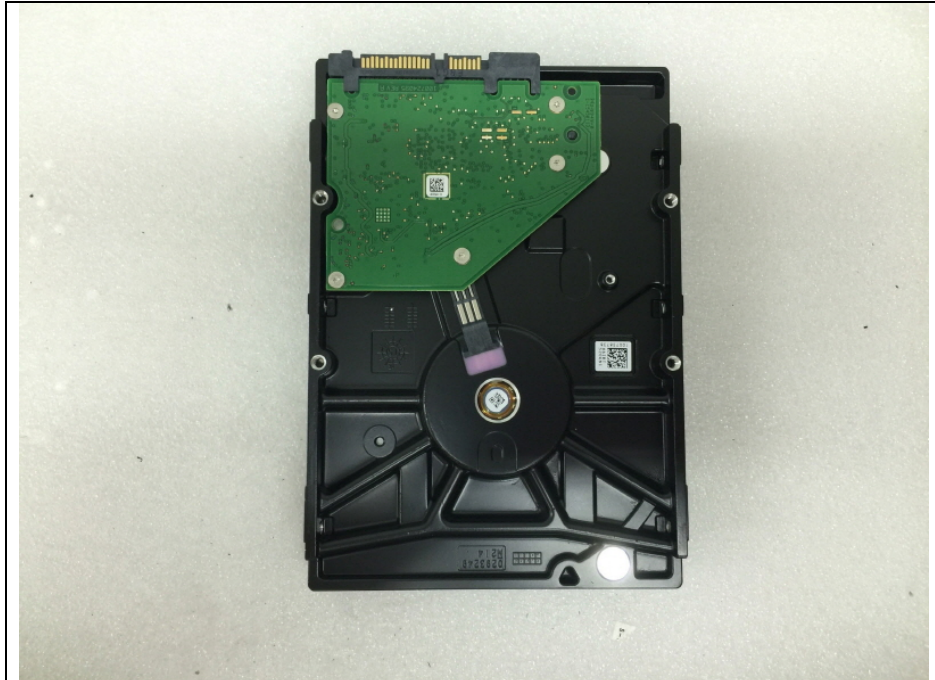





AC/DC Adaptor#1







AC/DC Adaptor#2



