

# EU Declaration of Conformity

According to

## EMC Directive 2014/30/EU


**For the following**

**Product** : NETWORK VIDEO RECORDER  
**Model Name** : DR-8432  
**Variant Model Name** : DR-8416

**Applicant** : IDIS CO., LTD.  
**Address** : 8-10, TECHNO 3-RO, YUSEONG-GU,  
DAEJEON, KOREA

**Manufactured at** : IDIS CO., LTD.  
**Address** : 8-10, TECHNO 3-RO, YUSEONG-GU,  
DAEJEON, KOREA

The submitted sample of the above equipment has been tested for CE marking according to following European Directive and standards:  
- Electromagnetic Compatibility Directive 2014/30/EU

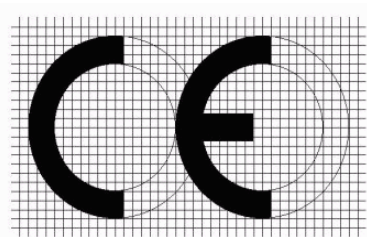

The referred test report(s) show that the product complies with standard(s) recognized as giving presumption of compliance with the essential requirements in the specified European Directive. This verification does not imply assessment of the production of the product. The CE marking may be affixed if all relevant and effective European Directives with CE are applicable.

The standards relevant for the evaluation of EMC requirements are as follows:

**Test Standards** : EN 55032:2015, Class A  
EN 50130-4:2011 /A1:2014  
EN 61000-3-2:2014  
EN 61000-3-3:2013

Date of issue: 2018-03-15

IDIS CO., LTD.

8-10, TECHNO 3-RO, YUSEONG-GU,  
DAEJEON, KOREA

-----  
(Name and signature of authorized person)



# TEST REPORT

|  |  |   |
|--|--|---|
| <p><b>KCTL Inc.</b><br/>                 65, Sinwon-ro, Yeongtong-gu,<br/>                 Suwon-si, Gyeonggi-do, 16677, Korea<br/>                 TEL: 82-31-285-0894 FAX: 82-505-299-8311<br/> <a href="http://www.kctl.co.kr">www.kctl.co.kr</a></p> | <p>Report No.:<br/>                 KR18-SEC0064<br/>                 Page (1) of (70)</p> |  |
|--|--|---|

**1. Client**

- Name : IDIS CO., LTD.
- Address : 8-10, TECHNO 3-RO, YUSEONG-GU,  
 DAEJEON, KOREA
- Date of Receipt : 2018-02-05

**2. Use of Report** : -



**3. Name of Product and Model** : NETWORK VIDEO RECORDER / DR-8432

**4. Manufacturer and Country of Origin** : IDIS CO., LTD. / Korea

**5. Date of Test** : 2018-02-21 to 2018-03-11

**6. Test method used** : EN 55032:2015, Class A  
 EN 50130-4:2011 /A1:2014  
 EN 61000-3-2:2014  
 EN 61000-3-3:2013

**7. Test Results** : Refer to the test result in the test report

|             |  |   |
|-------------|--|---|
| Affirmation | Tested by  | Technical Manager   |
|             | <br>Name : Jinwon Kim (Signature) | <br>Name : Gunsu Park (Signature) |

2018-03-15

## KCTL Inc.

As a test result of the sample which was submitted from the client, this report does not guarantee the whole product quality. This test report should not be used and copied without a written agreement by KCTL Inc.

**REPORT REVISION HISTORY**

| Date       | Revision          | Page No |
|------------|-------------------|---------|
| 2018-03-15 | Originally issued | -       |
|            |                   |         |
|            |                   |         |
|            |                   |         |
|            |                   |         |
|            |                   |         |
|            |                   |         |
|            |                   |         |
|            |                   |         |
|            |                   |         |

*This report shall not be reproduced except in full, without the written approval of KCTL Inc. This document may be altered or revised by KCTL Inc. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by KCTL Inc. will constitute fraud and shall nullify the document.*



## Contents

|  |           |
|--|-----------|
| <b>1. Applicant information .....</b>            | <b>4</b>  |
| <b>2. Laboratory information.....</b>            | <b>5</b>  |
| <b>3. Test system configuration.....</b>         | <b>6</b>  |
| 3.1 Operation environment.....                   | 6         |
| 3.2 Measurement Uncertainty .....                | 7         |
| 3.3 Measurement Program.....                     | 8         |
| <b>4. Description of EUT .....</b>               | <b>9</b>  |
| 4.1 General information.....                     | 9         |
| 4.2 Product description.....                     | 11        |
| 4.3 Auxiliary equipments .....                   | 12        |
| 4.4 Test configuration .....                     | 13        |
| 4.5 Operating conditions .....                   | 14        |
| <b>5. Summary of test results .....</b>          | <b>15</b> |
| 5.1 Summary of EMI emission test results.....    | 15        |
| 5.2 Summary of immunity test results .....       | 15        |
| 5.3 Performance criteria .....                   | 16        |
| <b>6. Test results .....</b>                     | <b>18</b> |
| 6.1 Conducted Emission .....                     | 18        |
| 6.2 Radiated Emission .....                      | 27        |
| 6.3 Harmonics .....                              | 34        |
| 6.4 Flicker.....                                 | 39        |
| 6.5 Electrostatic Discharge.....                 | 42        |
| 6.6 Radio Frequency Electromagnetic Fields ..... | 47        |
| 6.7 Electric Fast Transient/BURST .....          | 51        |
| 6.8 Surge.....                                   | 54        |
| 6.9 Conducted Immunity .....                     | 58        |
| 6.10 Dips and Interruption .....                 | 61        |
| 6.11 Mains supply voltage variations.....        | 63        |
| <b>7. EUT photographs .....</b>                  | <b>64</b> |

**KCTL Inc.**

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR18-SEC0064

Page (4) of (72)



## 1. Applicant information

**Applicant:** IDIS CO., LTD.  
**Address:** 8-10, TECHNO 3-RO, YUSEONG-GU, DAEJEON, KOREA  
**Telephone:** +82-31-723-5205  
**Fax:** +82-31-723-5108  
**E-mail:** [jjungdoo@kidis.co.kr](mailto:jjungdoo@kidis.co.kr)  
**Contact name:** Jungdoo Jang

**Manufacturer:** IDIS CO., LTD.  
**Address:** 8-10, TECHNO 3-RO, YUSEONG-GU, DAEJEON, KOREA  
**Telephone:** +82-31-723-5205  
**Fax:** +82-31-723-5108  
**E-mail:** [jjungdoo@kidis.co.kr](mailto:jjungdoo@kidis.co.kr)  
**Contact name:** Jungdoo Jang



## KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR18-SEC0064

Page (5) of (72)

# KCTL

## 2. Laboratory information

### Address

#### **KCTL Inc. (Suwon Lab.)**

65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea

Telephone Number: 82 31 285 0894

Facsimile Number: 82 505 299 8311


FCC Site Designation No: KR0040, FCC Site Registration No: 687132

VCCI Registration No. : R-3327, G-198, C-3706, T-1849

Industry Canada Registration No. : 8035A

KOLAS NO.: KT231

### **SITE MAP**

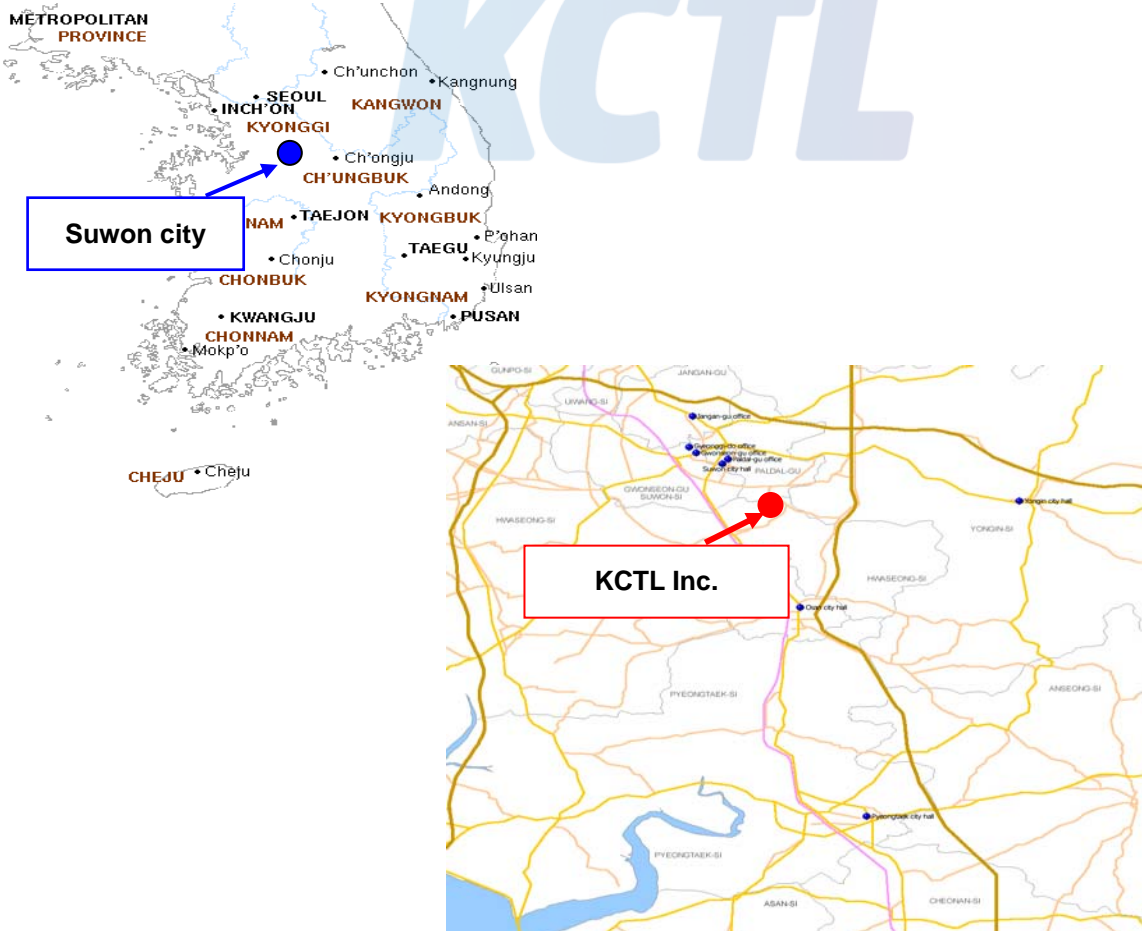

### 3. Test system configuration

#### 3.1 Operation environment

|                    | Temperature          | Humidity                     | Pressure  |
|--------------------|----------------------|------------------------------|-----------|
| Chamber 10 m(RE)   | 24.9 °C /<br>25.0 °C | 21.6 % R.H. /<br>21.3 % R.H. | -         |
| Shielded room(CE)  | 22.7 °C              | 24.1 % R.H.                  | -         |
| Shielded room(ESD) | 21.5 °C              | 49.2 % R.H.                  | 101.7 kPa |

#### Test site

These testing items were performed following locations;

| Test item                         | Test site                       |
|-----------------------------------|---------------------------------|
| Conducted Emission                | Shielded Room                   |
| Radiated Emission                 | 10 m Chamber                    |
| Harmonics current                 | EMI Test area                   |
| Voltage fluctuations and flickers | EMI Test area                   |
| Electrostatic discharge           | Shielded Room                   |
| Radiated RF immunity              | 6F Fully anechoic chamber (3 m) |
| Electric Fast Transient/BURST     | Shielded Room                   |
| Surge                             | Shielded Room                   |
| Conducted RF immunity             | Shielded Room                   |
| Voltage dip/interruption          | Shielded Room                   |
| Mains supply voltage variations   | Shielded Room                   |

### 3.2 Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC.

The factors contributing to uncertainties are test receiver, cable loss, antenna factor calibration, Antenna directivity, antenna factor variation with height, antenna phase center variation, antenna frequency interpolation, measurement distance variation, site imperfection, mismatch, and system repeatability. Based on CISPR 16-4-2, the measurement uncertainty level with a 95% confidence level was applied.

| Conducted Emission measurement (Confidence level about 95 %, $k = 2$ )           |                     |                  |         |         |
|--|---------------------|------------------|---------|---------|
| Shielded Room (CE#1)   | 9 kHz ~ 150 kHz:    | 3.66 dB          |         |         |
|  | 150 kHz ~ 30 MHz:   | 3.24 dB          |         |         |
| Shielded Room (CE#2)   | 9 kHz ~ 150 kHz:    | 3.48 dB          |         |         |
|  | 150 kHz ~ 30 MHz:   | 3.06 dB          |         |         |
| Radiated Emission measurement (Confidence level about 95 %, $k = 2$ )            |                     |                  |         |         |
| 10 m Chamber (4F)  | 30 MHz ~ 300 MHz    | 3 m:             | 5.02 dB |         |
|  |                     | 10 m:            | 5.00 dB |         |
|  | 300 MHz ~ 1 000 MHz | 3 m:             | 5.16 dB |         |
|  |                     | 10 m:            | 5.04 dB |         |
|  | 1 GHz ~ 6 GHz       |                  | 3 m:    | 6.30 dB |
|  | 10 m Chamber (2F)   | 30 MHz ~ 300 MHz | 3 m:    | 5.54 dB |
| 10 m:  |                     |                  | 5.52 dB |         |
| 300 MHz ~ 1 000 MHz  |                     | 3 m:             | 5.60 dB |         |
|  |                     | 10 m:            | 5.48 dB |         |
| 1 GHz ~ 6 GHz  |                     | 3 m:             | 6.32 dB |         |
| Radio Frequency Electromagnetic Fields (Confidence level about 95 %, $k = 2$ )   |                     |                  |         |         |
| 0.86 dB  |                     |                  |         |         |
| Disturbance Power Electromagnetic Fields (Confidence level about 95 %, $k = 2$ ) |                     |                  |         |         |
| 2.82 dB  |                     |                  |         |         |



### 3.3 Measurement Program

These test items were performed by software programs;

| Test item  | Measurement Program    |                                      | Used |
|--|------------------------|--------------------------------------|------|
| Conducted Emission   | EP5CE_V 5.4.0(TOYO)    |                                      | ☒    |
| Radiated Emission  | 2F                     | EP5RE_V 4.6.0(TOYO)                  | ☒    |
|  | 4F                     | EP5RE_V 5.11.10(TOYO)                |      |
| Harmonics current,<br>Voltage fluctuations and flickers                | CTS 4_V 4.6.2 (AMETEK) |                                      | ☒    |
| Radiated RF immunity   | 3F                     | EMC32_V 9.01.0<br>(ROHDE & SCHWARZ)  | ☒    |
|  | 6F                     | EMC32_V 8.53.0<br>(ROHDE & SCHWARZ)  |      |
| Electrical Fast Transient/BURST,<br>Surge,<br>Voltage dip/interruption | 6F(#1)                 | ISMIEC_V 4.08(EM TEST)               | ☒    |
|  | 6F(#2)                 | ISMIEC_V 4.07(EM TEST)               |      |
|  | 3F(#3)                 | IEC_V 5.2.9(EM TEST)                 |      |
| Conducted RF immunity  | 6F(#1)                 | EMC32_V 9.25.00<br>(ROHDE & SCHWARZ) | ☒    |
|  | 3F(#2)                 | ICD_V 5.3.4(EM TEST)                 |      |

## 4. Description of EUT

### 4.1 General information

| VIDEO                     |  |
|---------------------------|--|
| <b>Video Inputs</b>       | 16/32 IP channels  |
| <b>Video Outputs</b>      | 1 HDMI, 1 VGA  |
| <b>Display Resolution</b> | 3840x2160, 1920 x 1200 , 1920 x 1080, 1680 x 1050, 1600 x 1200 |
| <b>Display Speed</b>      | Up to 960ips (DR-8432/8432D)<br>Up to 480ips (DR-8416)         |

\* If more than 16 cameras from video encoders are registered on the NVR, video may not be displayed smoothly in a remote program.

| RECORDING              |  |
|------------------------|--|
| <b>Max. Throughput</b> | 230Mbps, 480ips@Full HD, 120ips @ 4K (UHD) (DR-8416) 230Mbps, 960ips @ Full HD,120ips @ 4K (UHD) (DR-8432/8432D) |
| <b>Compression</b>     | H.265, H.264   |
| <b>Recording Mode</b>  | Time-Lapse, Event, Pre-Event, Panic  |

| PLAYBACK           |  |
|--------------------|--|
| <b>Performance</b> | 16ch Full HD synchronous playback<br>4ch 4K playback |
| <b>Search Mode</b> | Time-lapse, Event log,Thumbnail, Motion, Text-in     |

| STORAGE                   |   |
|---------------------------|---|
| <b>HDD</b>                | SATA x 8, eSATA x4,(Up to 6TB capacity for each disk), RAID 1, 5, 6, 10 supported |
| <b>Total Capacity</b>     | 144TB(6TB x (8(internal)+4x4(internal)))  |
| <b>Data Export Device</b> | USB HDD, USB Stick  |

| NETWORK                    |  |
|----------------------------|--|
| <b>Client Connection</b>   | Gigabit Ethernet(Client) x1  |
| <b>Video in Connection</b> | Gigabit Ethernet(Video In) x3, SFP(Video In ) x 2  |
| <b>Transmission Speed</b>  | 50Mbps / 100Mbps(BRP Mode)   |
| <b>Event Notification</b>  | Email (attach clip (.cbf) .MP4), Callback to Remote S/W, Push notification (IDIS Mobile) |

**KCTL Inc.**

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR18-SEC0064

Page (10) of (72)

**INTERFACE**

|                                  |   |
|----------------------------------|---|
| <b>Audio In / Out</b>            | NVR : 1 RCA / 1 RCA + 1 HDMI  |
| <b>NVR Alarm Spec- In</b>        | 16 TTL, NC/NO programmable, 2.4V (NC) or 0.3V (NO) threshold, 5V DC |
| <b>NVR Alarm Spec- Out</b>       | 4 relay output, NC/NO, 2A@125V AC, 1A@30V DC                        |
| <b>NVR Alarm Spec - Reset IN</b> | 1 TTL, terminal block   |
| <b>Internal Buzzer</b>           | Yes   |
| <b>Serial Interface</b>          | RS232 (Terminal Block), RS485 (Terminal Block)                      |
| <b>USB</b>                       | USB 2.0 x 2. USB 3.0 x 1  |

**GENERAL**

|  |   |
|--|---|
| <b>Operating System</b>                | Embedded Linux  |
| <b>Unit Dimensions<br/>(W x H x D)</b> | 482.6mm x 88mm x 523.3mm (19"x3.5"x20.6")   |
| <b>Unit Weight</b>                     | 10.5kg (23.1lb) (DR-8416/DR-8432)<br>10.8kg (23.8lb) (DR-8432D)                                     |
| <b>Working Temperature</b>             | 0°C to 40°C   |
| <b>Operating Humidity</b>              | 0% ~ 90%  |
| <b>Power</b>                           | AC 100-240 V, 50/60Hz, 6.0 - 3.0A (DR-8416/DR-8432)<br>AC 100-240 V, 50/60Hz, 8.0 - 4.0A (DR-8432D) |
| <b>Power input</b>                     | AC 100-240 V, 50/60Hz, 6.0 - 3.0A (DR-8416/DR-8432)<br>AC 100-240 V, 50/60Hz, 8.0 - 4.0A (DR-8432D) |
| <b>Power Consumption</b>               | Max. 105W (DR-8416/DR-8432)<br>Max. 115W (DR-8432D)   |

This test report shall not be reproduced, except in full, without the written approval.

## 4.2 Product description


|                          |  |
|--------------------------|--|
| Type of product          | NETWORK VIDEO RECORDER                     |
| Model name (Basic)       | DR-8432                                    |
| Model name (Variant)     | DR-8416                                    |
| Difference               | Limit the number of channels with software |
| Serial no                | -  |
| Testing voltage          | 230 V, 50 Hz                               |
| Input/Output rating      | AC 100 - 240 V, 50/60 Hz                   |
| Internal clock frequency | 6 GHz                                      |
| Note                     | -  |



### 4.3 Auxiliary equipments

| Type                      | Model / Part #    | S/N               | Manufacturer                         |
|---------------------------|-------------------|-------------------|--------------------------------------|
| MIC                       | -                 | -                 | -                                    |
| Note PC                   | HP ProBook 470 G2 | CND50740W0        | HP                                   |
| Adapter #1                | PPP009C           | F220881440034774  | HP                                   |
| Monitor #1                | 27UD88            | 705NTSU4H358      | LG                                   |
| Adapter #2                | LCAP31            | EH37N629490051248 | LG                                   |
| Controller                | SCC-1000          | C60E67WC801263M   | SAMSUNG                              |
| Adapter #3                | ADS-65LSI-12-1    | -                 | HOIOTO                               |
| Camera #1                 | B310-DP           | -                 | IDIS                                 |
| Camera #2                 | EB310-P           | -                 | IDIS                                 |
| Adapter #4                | PW1205B           | -                 | DOO HYUN ELEC                        |
| Sensor                    | -                 | -                 | DAE MYUNG<br>ELECTRONICS<br>CO., LTD |
| Light Bar                 | DS-360            | -                 | DAE MYUNG<br>ELECTRONICS<br>CO., LTD |
| PoE                       | DDR3F-DIE         | -                 | -                                    |
| USB 2.0 Memory<br>(16 GB) | SDCZ50-016G       | -                 | SanDisk                              |
| USB 3.0 Memory<br>(16 GB) | SDCZ48-016G-U46   | -                 | SanDisk                              |
| Optical Module #1         | APS31123CDL20     | S1T31251200045    | ATOP                                 |
| Optical Module #2         | APS31123CDL20     | S1T31251200067    | ATOP                                 |
| Optical Module #3         | APS31123CDL20     | S1T31251200051    | ATOP                                 |
| External HDD              | IT-735            | 6127677           | IT-CEO                               |
| Adapter #5                | PW1205B           | -                 | DOO HYUN ELEC                        |

### 4.4 Test configuration

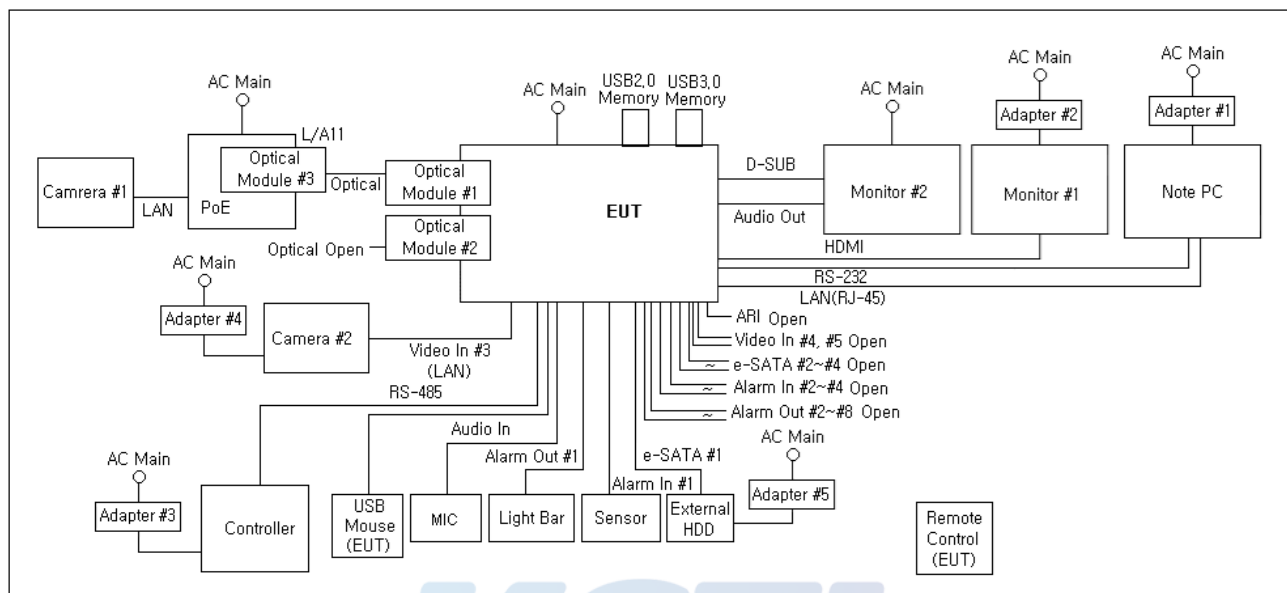

|    | Start |                   | End               |             | Cable      |          |          |
|----|-------|-------------------|-------------------|-------------|------------|----------|----------|
|    | Name  | I/O port          | Name              | I/O port    | Length (m) | Spec.    | Cable    |
| 1  | EUT   | Power #1          | AC Main           | -           | 1.5        | Unshield | -        |
| 2  |       | USB2.0            | USB2.0 Memory     | -           | Direct     | -        | -        |
| 3  |       | USB3.0            | USB3.0 Memory     | -           | Direct     | -        | -        |
| 4  |       | Video In #1       | Optical Module #1 | -           | Direct     | -        | -        |
| 5  |       | Video In #2       | Optical Module #2 | -           | Direct     | -        | -        |
| 6  |       | Alarm Out #1      | Light Bar         | -           | 3.0        | Unshield | Out-door |
| 7  |       | Alarm In #1       | Sensor            | -           | 3.0        | Unshield | Out-door |
| 8  |       | Video In #3 (LAN) | Camera #2         | LAN         | 3.0        | Unshield | Out-door |
| 9  |       | RS-485            | Controller        | RS-485      | 3.0        | Unshield | Out-door |
| 10 |       | D-SUB             | Monitor #2        | D-SUB       | 1.5        | Shield   | -        |
| 11 |       | Audio Out         | Monitor #2        | Audio In    | 3.0        | Shield   | Out-door |
| 12 |       | HDMI              | Monitor #1        | HDMI        | 1.7        | Shield   | -        |
| 13 |       | RS-232            | Note PC           | USB         | 3.0        | Unshield | Out-door |
| 14 |       | e-SATA #1         | External HDD      | -           | 0.5        | Shield   | -        |
| 15 |       | USB               | USB Mouse(EUT)    | -           | 1.0        | Shield   | -        |
| 16 |       | e-SATA #2~#4      | Open              | -           | 0.5        | Shield   | -        |
| 17 |       | Video In #3, #4   | Open              | -           | 3.0        | Unshield | -        |
| 18 |       | LAN(RJ-45)        | Note PC           | LAN (RJ-45) | 3.0        | Unshield | Out-door |
| 19 |       | ARI               | Open              | -           | 3.0        | Unshield | -        |

This test report shall not be reproduced, except in full, without the written approval.

|    |                   |                 |                   |         |        |          |          |
|----|-------------------|-----------------|-------------------|---------|--------|----------|----------|
| 20 |                   | Alarm In #2~#4  | Open              | -       | 3.0    | Unshield | -        |
| 21 |                   | Alarm Out #2~#8 | Open              | -       | 3.0    | Unshield | -        |
| 22 |                   | Audio In        | MIC               | -       | 3.0    | Shield   | Out-door |
| 23 | Optical Module #2 | Optical         | Open              | -       | 3.0    | Unshield | -        |
| 24 | Optical Module #1 | Optical         | Optical Module #3 | Optical | 3.0    | Unshield | -        |
| 25 | PoE               | Power           | AC Main           | -       | 1.5    | Unshield | -        |
| 26 |                   | LAN             | Camrera #1        | LAN     | 2.5    | Unshield | -        |
| 27 |                   | L/A11           | Optical Module #3 | -       | Direct | -        | -        |
| 28 | Camera #2         | Power           | Adapter #4        | -       | 1.2    | Unshield | -        |
| 29 | Controller        | Power           | Adapter #3        | -       | 1.5    | Unshield | -        |
| 30 | Monitor #1        | Power           | Adapter #2        | -       | 1.0    | Unshield | -        |
| 31 | Note PC           | Power           | Adapter #1        | -       | 1.2    | Unshield | -        |
| 32 | External HDD      | Power           | Adapter #5        | -       | 1.2    | Unshield | -        |

## 4.5 Operating conditions

The EUT was configured as normal intended use.

| Test mode                                      | Normal operating  |
|--|---|
| Test #1  | Check the EUT operating test by the monitor #1, monitor #2. |
|  | Alarm test.(Used the Light bar, Sensor)                     |
|  | RS-485 test.(Used the controller)                           |
|  | Audio In test.(Used the MIC)                                |
|  | Audio Out test.(Used the Monitor #2)                        |
|  | Webview test.(Used the Note PC)                             |
|  | Ping test.(Used the Note PC)                                |
|  | RS-232 test.(Used the program: Teraterm)                    |
| Resolution: 1 920 x 1 080, HDMI: 3 840 x 2 160 |   |

## 5. Summary of test results

### 5.1 Summary of EMI emission test results

| Applied                             | Test items                        | Test method       | Result |
|-------------------------------------|-----------------------------------|-------------------|--------|
| <input checked="" type="checkbox"/> | Conducted Emission                | EN 55032:2015     | Pass   |
| <input checked="" type="checkbox"/> | Radiated Emission                 | EN 55032:2015     | Pass   |
| <input checked="" type="checkbox"/> | Harmonics current                 | EN 61000-3-2:2014 | Pass   |
| <input checked="" type="checkbox"/> | Voltage fluctuations and flickers | EN 61000-3-3:2013 | Pass   |

### 5.2 Summary of immunity test results

| Applied                             | Test items                      | Test method                | Result |
|-------------------------------------|---------------------------------|----------------------------|--------|
| <b>EN 50130-4:2011 /A1:2014</b>     |                                 |                            |        |
| <input checked="" type="checkbox"/> | Electrostatic discharge         | EN 61000-4-2:2009          | Pass   |
| <input checked="" type="checkbox"/> | Radiated RF immunity            | EN 61000-4-3:2006 /A2:2010 | Pass   |
| <input checked="" type="checkbox"/> | Electrical Fast Transient/BURST | EN 61000-4-4:2012          | Pass   |
| <input checked="" type="checkbox"/> | Surge                           | EN 61000-4-5:2014          | Pass   |
| <input checked="" type="checkbox"/> | Conducted RF immunity           | EN 61000-4-6:2014          | Pass   |
| <input checked="" type="checkbox"/> | Voltage dip/interruption        | EN 61000-4-11:2004         | Pass   |
| <input checked="" type="checkbox"/> | Mains supply voltage variations | EN 50130-4:2011 /A1:2014   | Pass   |

This product complies with the requirements of the EMC Directive 2014/30/EU.



### 5.3 Performance criteria

The variety and the diversity of the apparatus within the scope of this document makes it difficult to define precise criteria for the evaluation of the immunity test results.

If as a result of the application of the tests defined in this standard, the apparatus becomes dangerous or unsafe then the apparatus shall be deemed to have failed the test.

A functional description and a definition of performance by the manufacture and noted in the test report, based on the following criteria:

#### **Electrostatic discharge**

There shall be no damage, malfunction or change of status due to the conditioning.

Flickering of an indicator during the application of discharge is permissible, providing that there is no residual change in the EUT or any change in outputs, which could be interpreted by associated equipment as a change. The EUT shall meet the acceptance criteria for the functional test (see Clause 6), after the conditioning.

#### **Radiated electromagnetic fields**

There shall be no damage, malfunction or change of status due to the conditioning.

Flickering of an indicator during the conditioning is permissible, providing that there is no residual change in the EUT or any change in outputs, which could be interpreted by associated equipment as a change, and no such flickering of indicators occurs at a field strength of 3 V/m.

For components of CCTV systems, where the status is monitored by observing the TV picture, then deterioration of the picture is allowed at 10 V/m, providing.


- (a) there is no permanent damage or change to the EUT  
(e.g. no corruption of memory or changes to programmable setting etc.)
- (b) at 3 V/m, any deterioration of the picture is so minor that the system could still be used;  
and
- (c) there is no observable deterioration of the picture at 1 V/m.

The EUT shall meet the acceptance criteria for the functional test(see Clause 6), after the conditioning.

#### **Fast transient burst / slow high energy voltage surge**

There shall be no damage, malfunction or change of status due to the conditioning.

Flickering of an indicator during the application of the bursts is permissible, providing that there is no residual change in the EUT or any change in outputs, which could be interpreted by associated equipment as a change. The EUT shall meet the acceptance criteria for the functional test

|  |   |   |
|--|---|---|
| <p style="text-align: center;"><b>KCTL Inc.</b><br/> 65, Sinwon-ro, Yeongtong-gu,<br/> Suwon-si, Gyeonggi-do, 16677, Korea<br/> TEL: 82-31-285-0894 FAX: 82-505-299-8311<br/> <a href="http://www.kctl.co.kr">www.kctl.co.kr</a></p> | <p style="text-align: center;">Report No.:<br/> KR18-SEC0064<br/> Page (17) of (72)</p> |  |
|--|---|---|

(see Clause 6), after the conditioning.

### **Slow high energy voltage surge**

There shall be no damage, malfunction or change of status due to the conditioning.

Flickering of an indicator during the application of the surges is permissible, providing that there is no residual change in the EUT or any change in outputs, which could be interpreted by associated equipment as a change. The EUT shall meet the acceptance criteria for the functional test (see Clause 6), after the conditioning.

### **Conducted RF immunity**

There shall be no damage, malfunction or change of status due to the conditioning.

Flickering of an indicator during the conditioning is permissible, providing that there is no residual change in the EUT or any change in outputs, which could be interpreted by associated equipment as a change, and no such flickering of indicators occurs at  $U_0 = 130 \text{ dB}\mu\text{V}$ .

For components of CCTV systems, where the status is monitored by observing the TV picture, then deterioration of the picture is allowed at  $U_0 = 140 \text{ dB}\mu\text{V}$ , providing

- (a) there is no permanent damage or change to the EUT  
(e.g. no corruption of memory or changes to programmable settings, etc.)
- (b) at  $U_0 = 130 \text{ dB}\mu\text{V}$ , any deterioration of the picture is so minor that the system could still be used, and
- (c) there is no observable deterioration of the picture at  $U_0 = 120 \text{ dB}\mu\text{V}$ .

The EUT shall meet the acceptance criteria for the functional test(see Clause 6), after the conditioning.

### **Voltage dip/interruption / Voltage variation**

There shall be no damage, malfunction or change of status due to the conditioning.

Flickering of an indicator during the conditioning is permissible, providing that there is no residual change in the EUT or any change in outputs, which could be interpreted by associated equipment as a change. The EUT shall meet the acceptance criteria for the functional test(see Clause 6), after the conditioning.

### **Mains supply voltage variations**

There shall be no damage, malfunction or change of status due to the different supply voltage conditions. The EUT shall meet the acceptance criteria for the functional test(see Clause 6), during the conditioning.

## 6. Test results

### 6.1 Conducted Emission

|                    |                        |                   |             |
|--------------------|------------------------|-------------------|-------------|
| Test specification | EN 55032:2015, Class A |                   |             |
| Testing voltage    | 230 V, 50 Hz           |                   |             |
| Test facility      | Shielded room (CE#1)   |                   |             |
| Date               | 2018-02-22             |                   |             |
| Temperature (°C)   | 22.7 °C                | Humidity (% R.H.) | 24.1 % R.H. |
| Remarks            | Pass                   |                   |             |

Both conducted lines are measured in Quasi-Peak and C/Average mode, including the worst-case data points for each tested configuration. The EUT measured in accordance with the methods described in standards.

#### 6.1.1 Limits of conducted emission measurement

AC main

| Frequency [MHz] | Resolution Bandwidth [kHz] | Class A (dB( $\mu$ V)) |         | Class B (dB( $\mu$ V)) |         |
|-----------------|----------------------------|------------------------|---------|------------------------|---------|
|                 |                            | Quasi-peak             | Average | Quasi-peak             | Average |
| 0.15 ~ 0.5      | 9                          | 79                     | 66      | 66 ~ 56                | 56 ~ 46 |
| 0.5 ~ 5         | 9                          | 73                     | 60      | 56                     | 46      |
| 5 ~ 30          | 9                          | 73                     | 60      | 60                     | 50      |

Telecommunication

| Frequency [MHz] | Resolution Bandwidth [kHz] | Class A Limits (dB( $\mu$ V)) |          | Current Limits (dB( $\mu$ V)) |          |
|-----------------|----------------------------|-------------------------------|----------|-------------------------------|----------|
|                 |                            | Quasi-Peak                    | Average  | Quasi-Peak                    | Average  |
| 0.15 ~ 0.5      | 9                          | 97 to 87                      | 84 to 74 | 53 to 43                      | 40 to 30 |
| 0.5 ~ 30        | 9                          | 87                            | 74       | 43                            | 30       |
| Frequency [MHz] | Resolution Bandwidth [kHz] | Class B Limits (dB( $\mu$ V)) |          | Current Limits (dB( $\mu$ V)) |          |
|                 |                            | Quasi-Peak                    | Average  | Quasi-Peak                    | Average  |
| 0.15 ~ 0.5      | 9                          | 84 to 74                      | 74 to 64 | 40 to 30                      | 30 to 20 |
| 0.5 ~ 30        | 9                          | 74                            | 64       | 30                            | 20       |

If the reading on the measuring receiver shows fluctuations close to the limit, the reading shall be observed for at least 15 seconds at each measurement frequency, the highest reading shall be recorded, with the exception of any brief isolated high reading (which shall be ignored).

### 6.1.2 Used equipments

| Equipment             | Model no.             | Serial no.        | Makers      | Next Cal. Date | Used                                |
|-----------------------|-----------------------|-------------------|-------------|----------------|-------------------------------------|
| EMI TEST RECEIVER     | ESCI                  | 100001            | R&S         | 2018.08.24     | <input checked="" type="checkbox"/> |
| TWO-LINE<br>V-NETWORK | ENV216                | 101358            | R&S         | 2018.08.01     | <input checked="" type="checkbox"/> |
| TWO-LINE<br>V-NETWORK | ENV216                | 101584            | R&S         | 2018.07.03     | <input checked="" type="checkbox"/> |
| 8-WIRE ISN CAT5       | 8158 CAT5             | CAT5-8158-0071    | SCHWARZBECK | 2018.08.30     | <input checked="" type="checkbox"/> |
| 8-WIRE ISN CAT5       | NTFM 8158<br>ISN CAT5 | CAT5 8158<br>#138 | SCHWARZBECK | 2018.05.18     | <input checked="" type="checkbox"/> |



**KCTL Inc.**

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)


Report No.:  
KR18-SEC0064

Page (20) of (72)



6.1.3 Photographs of test setup

AC Main

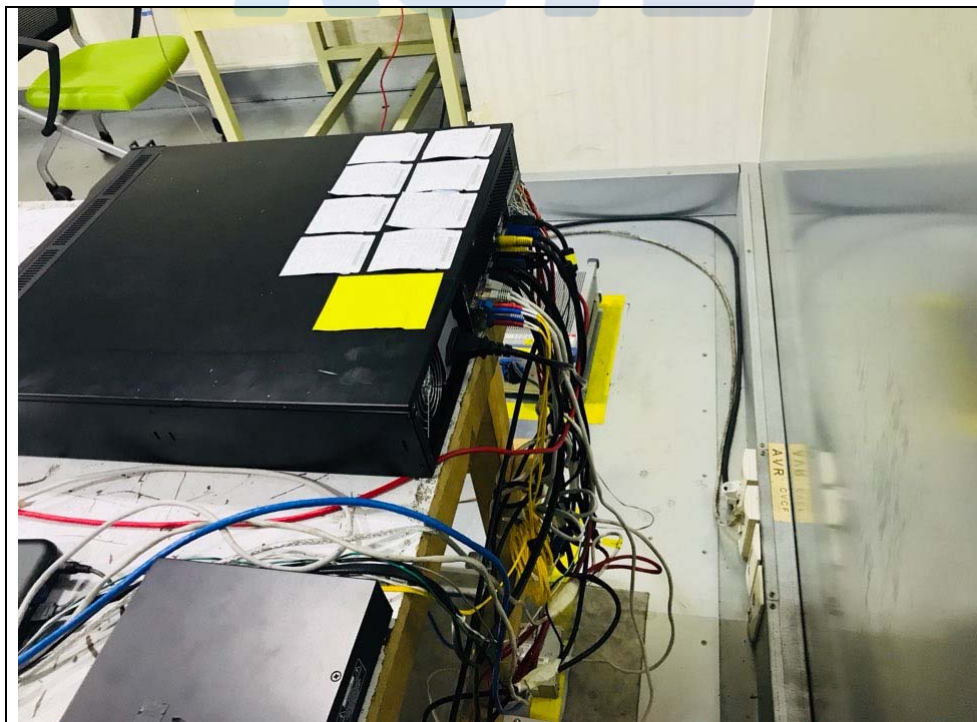



**KCTL Inc.**

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR18-SEC0064

Page (21) of (72)

**KCTL**

Telecommunication



**KCTL**

# KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)


Report No.:  
KR18-SEC0064

Page (22) of (72)



## 6.1.4 Conducted emission measurement result

### AC Main

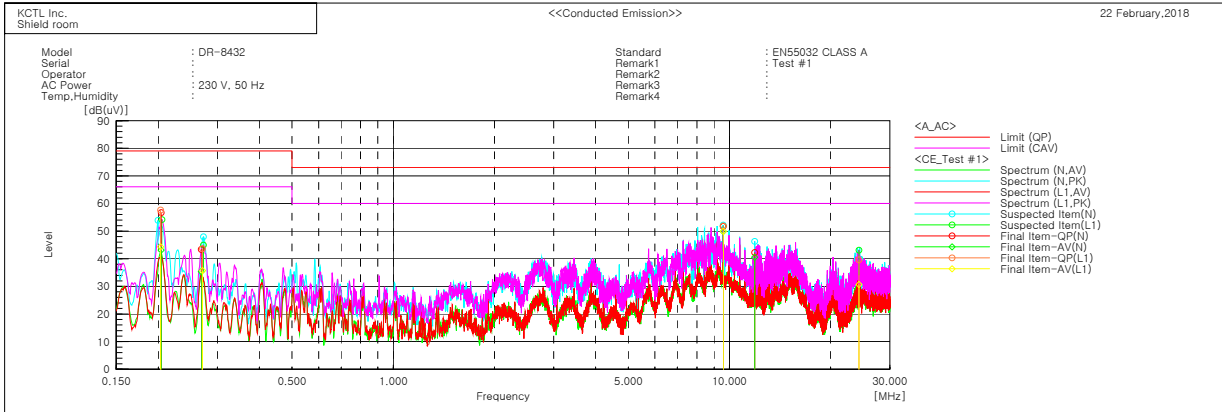

#### Final Result

##### --- N Phase ---

| No. | Frequency [MHz] | Reading QP [dB(uV)] | Reading CAV [dB(uV)] | c. f [dB] | Result QP [dB(uV)] | Result CAV [dB(uV)] | Limit QP [dB(uV)] | Limit AV [dB(uV)] | Margin QP [dB] | Margin CAV [dB] |
|-----|-----------------|---------------------|----------------------|-----------|--------------------|---------------------|-------------------|-------------------|----------------|-----------------|
| 1   | 0.20416         | 47.7                | 34.1                 | 9.0       | 56.7               | 43.1                | 79.0              | 66.0              | 22.3           | 22.9            |
| 2   | 0.26849         | 33.9                | 25.9                 | 9.5       | 43.4               | 35.4                | 79.0              | 66.0              | 35.6           | 30.6            |
| 3   | 9.5847          | 41.8                | 40.0                 | 9.9       | 51.7               | 49.9                | 73.0              | 60.0              | 21.3           | 10.1            |
| 4   | 11.88385        | 32.3                | 30.5                 | 10.0      | 42.3               | 40.5                | 73.0              | 60.0              | 30.7           | 19.5            |

##### --- L1 Phase ---

| No. | Frequency [MHz] | Reading QP [dB(uV)] | Reading CAV [dB(uV)] | c. f [dB] | Result QP [dB(uV)] | Result CAV [dB(uV)] | Limit QP [dB(uV)] | Limit AV [dB(uV)] | Margin QP [dB] | Margin CAV [dB] |
|-----|-----------------|---------------------|----------------------|-----------|--------------------|---------------------|-------------------|-------------------|----------------|-----------------|
| 1   | 0.20347         | 47.8                | 34.5                 | 9.8       | 57.6               | 44.3                | 79.0              | 66.0              | 21.4           | 21.7            |
| 2   | 0.27082         | 34.0                | 26.1                 | 9.6       | 43.6               | 35.7                | 79.0              | 66.0              | 35.4           | 30.3            |
| 3   | 9.58238         | 42.0                | 40.0                 | 9.9       | 51.9               | 49.9                | 73.0              | 60.0              | 21.1           | 10.1            |
| 4   | 24.2706         | 29.5                | 20.6                 | 10.1      | 39.6               | 30.7                | 73.0              | 60.0              | 33.4           | 29.3            |

# KCTL Inc.


65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR18-SEC0064

Page (23) of (72)




## Telecommunication

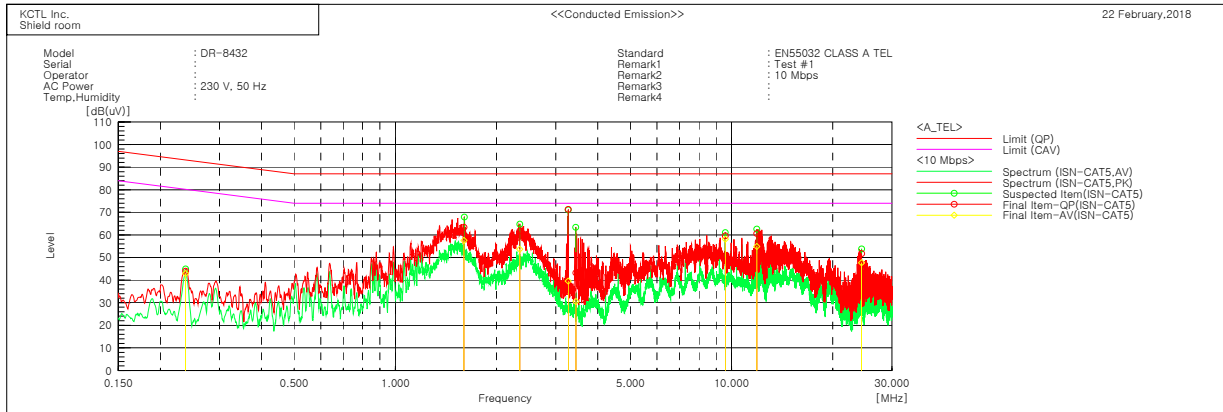

### Final Result

--- ISN-CAT5 Phase ---

| No. | Frequency [MHz] | Reading QP [dB(uV)] | Reading CAV [dB(uV)] | c.f [dB] | Result QP [dB(uV)] | Result CAV [dB(uV)] | Limit QP [dB(uV)] | Limit AV [dB(uV)] | Margin QP [dB] | Margin CAV [dB] |
|-----|-----------------|---------------------|----------------------|----------|--------------------|---------------------|-------------------|-------------------|----------------|-----------------|
| 1   | 0.23777         | 34.5                | 33.4                 | 9.5      | 44.0               | 42.9                | 93.2              | 80.2              | 49.2           | 37.3            |
| 2   | 1.60039         | 54.0                | 48.2                 | 9.3      | 63.3               | 57.5                | 87.0              | 74.0              | 23.7           | 16.5            |
| 3   | 2.34573         | 52.6                | 44.4                 | 9.2      | 61.8               | 53.6                | 87.0              | 74.0              | 25.2           | 20.4            |
| 4   | 3.26842         | 62.1                | 30.4                 | 9.2      | 71.3               | 39.6                | 87.0              | 74.0              | 15.7           | 34.4            |
| 5   | 3.44311         | 34.0                | 21.3                 | 9.2      | 43.2               | 30.5                | 87.0              | 74.0              | 43.8           | 43.5            |
| 6   | 9.58815         | 50.0                | 48.5                 | 9.6      | 59.6               | 58.1                | 87.0              | 74.0              | 27.4           | 15.9            |
| 7   | 11.88651        | 50.9                | 45.1                 | 9.7      | 60.6               | 54.8                | 87.0              | 74.0              | 26.4           | 19.2            |
| 8   | 24.35803        | 41.9                | 37.9                 | 9.8      | 51.7               | 47.7                | 87.0              | 74.0              | 35.3           | 26.3            |

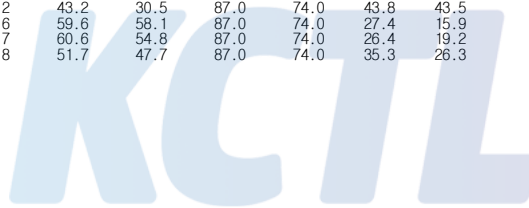




# KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR18-SEC0064

Page (24) of (72)

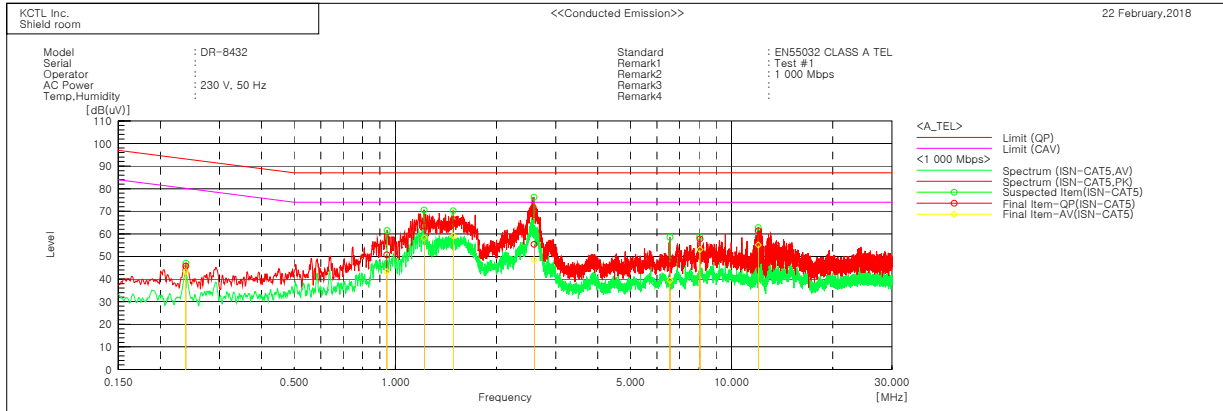

### Final Result

--- ISN-CAT5 Phase ---

| No. | Frequency [MHz] | Reading QP [dB(uV)] | Reading CAV [dB(uV)] | c.f [dB] | Result QP [dB(uV)] | Result CAV [dB(uV)] | Limit QP [dB(uV)] | Limit AV [dB(uV)] | Margin QP [dB] | Margin CAV [dB] |
|-----|-----------------|---------------------|----------------------|----------|--------------------|---------------------|-------------------|-------------------|----------------|-----------------|
| 1   | 0.23825         | 36.3                | 33.8                 | 9.5      | 45.8               | 43.3                | 93.2              | 80.2              | 47.4           | 36.9            |
| 2   | 0.94345         | 41.5                | 33.9                 | 9.3      | 50.8               | 43.2                | 87.0              | 74.0              | 36.2           | 30.8            |
| 3   | 1.21744         | 54.3                | 48.9                 | 9.3      | 63.6               | 58.2                | 87.0              | 74.0              | 23.4           | 15.8            |
| 4   | 1.48783         | 57.0                | 49.8                 | 9.3      | 66.3               | 59.1                | 87.0              | 74.0              | 20.7           | 14.9            |
| 5   | 2.55818         | 46.2                | 39.4                 | 9.2      | 55.4               | 48.6                | 87.0              | 74.0              | 31.6           | 25.4            |
| 6   | 6.55971         | 38.0                | 30.0                 | 9.4      | 47.4               | 39.4                | 87.0              | 74.0              | 39.6           | 34.6            |
| 7   | 8.05109         | 48.3                | 43.6                 | 9.5      | 57.8               | 53.1                | 87.0              | 74.0              | 29.2           | 20.9            |
| 8   | 12.00578        | 51.7                | 45.4                 | 9.7      | 61.4               | 55.1                | 87.0              | 74.0              | 25.6           | 18.9            |




# KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR18-SEC0064

Page (25) of (72)

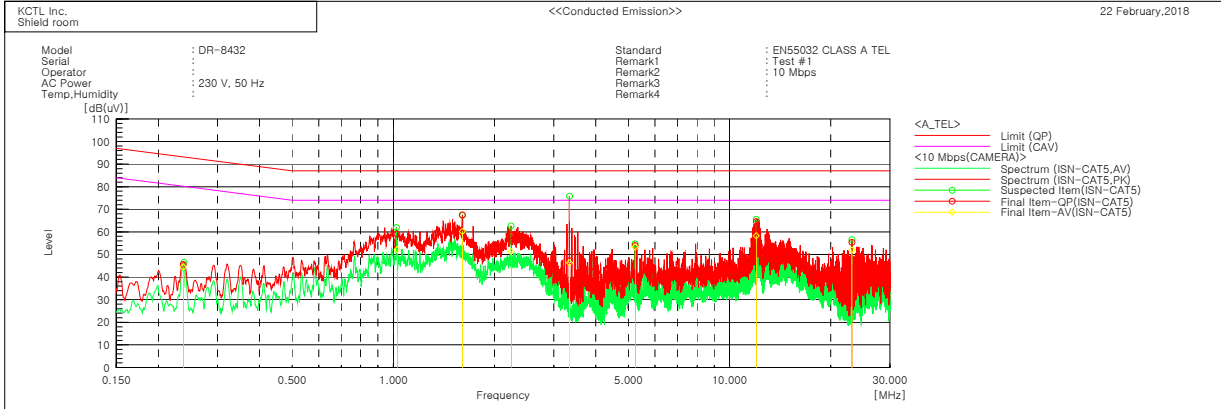

Final Result

--- ISN-CAT5 Phase ---

| No. | Frequency [MHz] | Reading QP [dB(uV)] | Reading CAV [dB(uV)] | c.f [dB] | Result QP [dB(uV)] | Result CAV [dB(uV)] | Limit QP [dB(uV)] | Limit AV [dB(uV)] | Margin QP [dB] | Margin CAV [dB] |
|-----|-----------------|---------------------|----------------------|----------|--------------------|---------------------|-------------------|-------------------|----------------|-----------------|
| 1   | 0.23738         | 36.1                | 34.9                 | 9.5      | 45.6               | 44.4                | 93.2              | 80.2              | 47.6           | 35.8            |
| 2   | 1.02567         | 49.8                | 42.9                 | 9.3      | 59.1               | 52.2                | 87.0              | 74.0              | 27.9           | 21.8            |
| 3   | 1.60464         | 58.2                | 50.9                 | 9.3      | 67.5               | 60.2                | 87.0              | 74.0              | 19.5           | 13.8            |
| 4   | 2.23893         | 49.3                | 42.1                 | 9.2      | 58.5               | 51.3                | 87.0              | 74.0              | 28.5           | 22.7            |
| 5   | 3.34372         | 38.0                | 37.1                 | 9.2      | 47.2               | 46.3                | 87.0              | 74.0              | 39.8           | 27.7            |
| 6   | 5.23712         | 44.6                | 44.1                 | 9.3      | 53.9               | 53.4                | 87.0              | 74.0              | 33.1           | 20.6            |
| 7   | 12.00921        | 54.9                | 48.6                 | 9.7      | 64.6               | 58.3                | 87.0              | 74.0              | 22.4           | 15.7            |
| 8   | 23.12816        | 45.6                | 42.2                 | 9.8      | 55.4               | 52.0                | 87.0              | 74.0              | 31.6           | 22.0            |




# KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR18-SEC0064

Page (26) of (72)

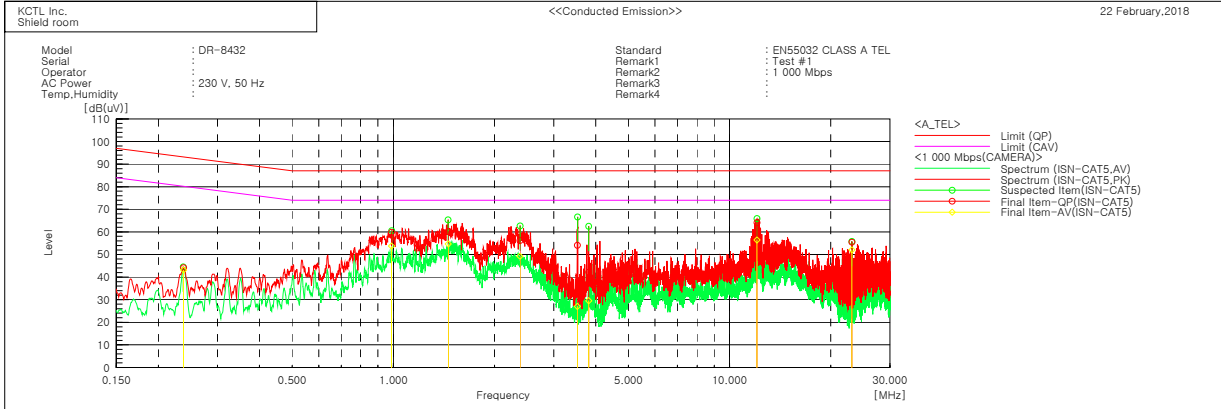

### Final Result

--- ISN-CAT5 Phase ---

| No. | Frequency [MHz] | Reading QP [dB(uV)] | Reading CAV [dB(uV)] | c.f [dB] | Result QP [dB(uV)] | Result CAV [dB(uV)] | Limit QP [dB(uV)] | Limit AV [dB(uV)] | Margin QP [dB] | Margin CAV [dB] |
|-----|-----------------|---------------------|----------------------|----------|--------------------|---------------------|-------------------|-------------------|----------------|-----------------|
| 1   | 0.23784         | 34.7                | 33.6                 | 9.5      | 44.2               | 43.1                | 93.2              | 80.2              | 49.0           | 37.1            |
| 2   | 0.98839         | 50.5                | 44.5                 | 9.3      | 59.8               | 53.8                | 87.0              | 74.0              | 27.2           | 20.2            |
| 3   | 1.45694         | 50.8                | 45.3                 | 9.3      | 60.1               | 54.6                | 87.0              | 74.0              | 26.9           | 19.4            |
| 4   | 2.38106         | 46.9                | 40.0                 | 9.2      | 56.1               | 49.2                | 87.0              | 74.0              | 30.9           | 24.8            |
| 5   | 3.52928         | 44.9                | 17.8                 | 9.2      | 54.1               | 27.0                | 87.0              | 74.0              | 32.9           | 47.0            |
| 6   | 3.81409         | 32.9                | 20.3                 | 9.3      | 42.2               | 29.6                | 87.0              | 74.0              | 44.8           | 44.4            |
| 7   | 12.06647        | 54.4                | 46.7                 | 9.7      | 64.1               | 56.4                | 87.0              | 74.0              | 22.9           | 17.6            |
| 8   | 23.12825        | 45.7                | 42.3                 | 9.8      | 55.5               | 52.1                | 87.0              | 74.0              | 31.5           | 21.9            |



## 6.2 Radiated Emission

|                    |                 |                        |                   |                            |
|--------------------|-----------------|------------------------|-------------------|----------------------------|
| Test specification |                 | EN 55032:2015, Class A |                   |                            |
| Testing voltage    |                 | 230 V, 50 Hz           |                   |                            |
| Test facility      |                 | 10 m Chamber (4F)      |                   |                            |
| Test distance      |                 | 10 m, 3 m              |                   |                            |
| Date               |                 | 2018-02-21             |                   |                            |
| 10 m<br>3 m        | Temperature(°C) | 24.9 °C<br>25.0 °C     | Humidity (% R.H.) | 21.6 % R.H.<br>21.3 % R.H. |
| Remarks            |                 | Pass                   |                   |                            |

Of those emissions above ( $L - 20$  dB), where  $L$  is the limit level in logarithmic units, record at least the emission levels and the frequencies of the six highest emissions.

The following data lists the significant emission frequencies, measured levels, correction factors (for antenna and cables), orientation of table, polarization and height of antenna, the corrected reading, the limit, and the amount of margin. All measurements were taken utilizing quasi-peak detection unless stated otherwise.

Measurements were performed at an antenna to EUT distance of 10 or 3 meters and elevated between 1 and 4 meters. Both vertical and horizontal antenna polarizations were measured.

Below 1 GHz, peak detector function mode for prescan was used with resolution bandwidth of 120 kHz and a video bandwidth of 300 kHz and sweep method.

The sweep time for prescan set below 200 ms up and final measurement with quasi-peak detector evaluated for suspected frequencies points, which are detected from prescan measurement.

Final measurements consisted of 3 steps.

First step, frequency fine tuning to find exact emission frequency.

Second step, rechecking to search for maximum height and azimuth for interference from EUT

In final step, there are conducted measuring with quasi-peak detector for points

which are detected from 1<sup>st</sup> step & 2<sup>nd</sup> step.

## 6.2.1 Limits of radiated emission measurement

### Limits below 1 GHz

| Frequency [MHz] | Resolution Bandwidth [kHz] | Class A (dB( $\mu$ V/m)) @ 10 m | Class B (dB( $\mu$ V/m)) @ 10 m |
|-----------------|----------------------------|---------------------------------|---------------------------------|
| 30 ~ 230        | 120                        | 40                              | 30                              |
| 230 ~ 1 000     | 120                        | 47                              | 37                              |

### Limits above 1 GHz

| Frequency [GHz] | Resolution Bandwidth [MHz] | Class A @ 3 m                  |                             | Class B @ 3 m                  |                             |
|-----------------|----------------------------|--------------------------------|-----------------------------|--------------------------------|-----------------------------|
|                 |                            | Average limit (dB( $\mu$ V/m)) | Peak limit (dB( $\mu$ V/m)) | Average limit (dB( $\mu$ V/m)) | Peak limit (dB( $\mu$ V/m)) |
| 1 ~ 3           | 1                          | 56                             | 76                          | 50                             | 70                          |
| 3 ~ 6           | 1                          | 60                             | 80                          | 54                             | 74                          |

Note - The lower limit applies at the transition frequency.

Measurements within 20 dB of the limit were then maximized by adjusting turntable position.

Final measurements were made using an C/Average detector.

Results checked manually and points close to the limit line were re-measured.

## 6.2.2 Used equipments

| Equipment                  | Model no.    | Serial no. | Makers        | Next Cal. Date | Used                                |
|----------------------------|--------------|------------|---------------|----------------|-------------------------------------|
| EMI TEST RECEIVER          | ESR7         | 101078     | R&S           | 2018.08.24     | <input checked="" type="checkbox"/> |
| Bilog Antenna              | CBL 6112D    | 37876      | TESEQ         | 2018.08.05     | <input checked="" type="checkbox"/> |
| AMPLIFIER                  | 310N         | 293004     | SONOMA        | 2018.08.24     | <input checked="" type="checkbox"/> |
| ATTENUATOR                 | 8491B        | MY39270292 | AGILENT       | -              | <input checked="" type="checkbox"/> |
| Antenna Mast               | MA4640-XP-ET | -          | Innco Systems | -              | <input checked="" type="checkbox"/> |
| Turn Table                 | TT 3.0-3t    | -          | MATURO        | -              | <input checked="" type="checkbox"/> |
| PREAMPLIFIER               | 8449B        | 3008A01802 | AGILENT       | 2018.04.06     | <input checked="" type="checkbox"/> |
| DOUBLE RIDGED HORN ANTENNA | 3115         | 00086706   | ETS-LINDGREN  | 2018.08.31     | <input checked="" type="checkbox"/> |
| Spectrum Analyzer          | FSV40        | 100988     | R&S           | 2019.01.05     | <input type="checkbox"/>            |

**KCTL Inc.**

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR18-SEC0064

Page (29) of (72)

**KCTL**

### 6.2.3 Sample calculation

The field strength is calculated adding the antenna Factor, cable loss and, Antenna pad adding, subtracting the amplifier gain from the measured reading.

The sample calculation is as follow:

$$\text{Result} = \text{M.R} + \text{C.F}(\text{A.F} + \text{C.L} + 6 \text{ dB Att} - \text{A.G})$$

M.R = Meter Reading

C.F = Correction Factor

A.F = Antenna Factor

C.L = Cable Loss

A.G = Amplifier Gain

6 dB Att = 6 dB Attenuator

If M.R is 30 dB, A.F 12 dB, C.L 5 dB, 6 dB, A.G 35 dB

The result is  $30 + 12 + 5 + 6 - 35 = 18 \text{ dB}(\mu\text{V}/\text{m})$

Bilog Antenna and ATTENUATOR (6 dB) were calibrated together.

AV = CAV : Abbreviation of CISPR Average


Correction

$$E_m = E_{dm} + 20\log(d/3)$$

$E_m$ : Result,  $E_{dm}$ : Measured value of the measured distance

## 6.2.4 Photographs of test setup

30 MHz ~ 1 GHz

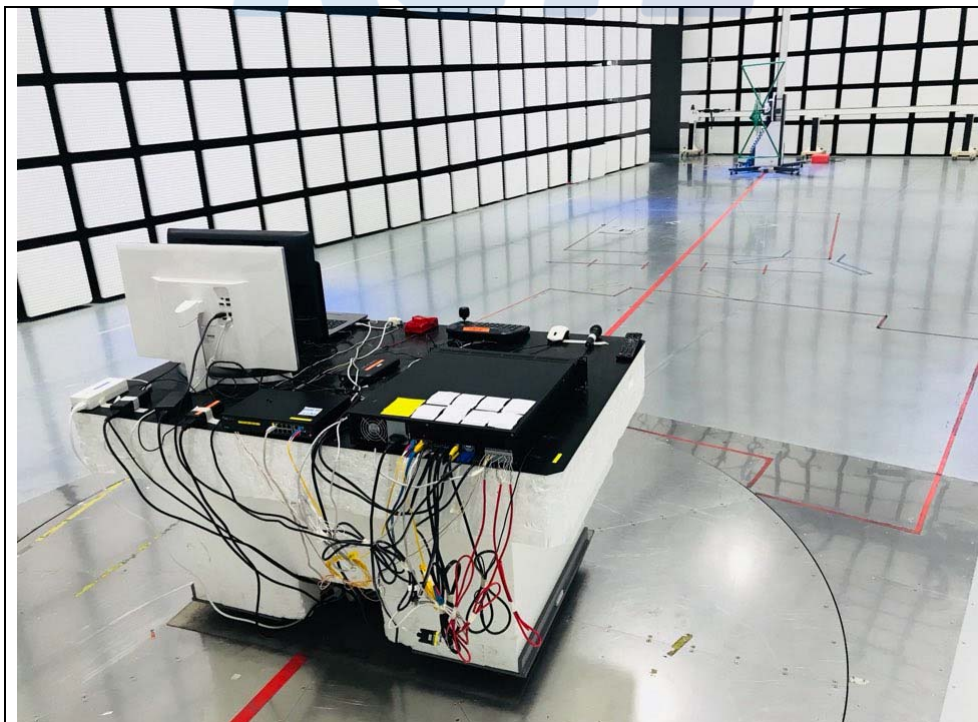



**KCTL Inc.**

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR18-SEC0064

Page (31) of (72)

**KCTL**

1 GHz ~ 6 GHz





# KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)



Report No.:  
KR18-SEC0064

Page (32) of (72)



## 6.2.5 Radiated emission measurement result

30 MHz ~ 1 GHz

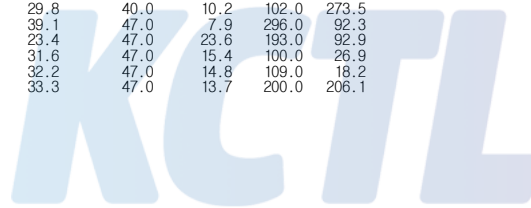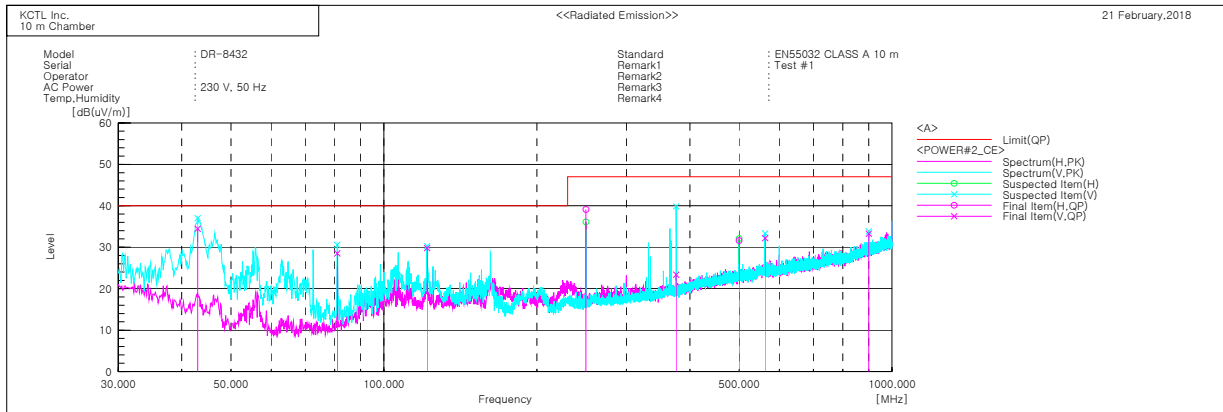

# KCTL Inc.


65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR18-SEC0064

Page (33) of (72)




## 1 GHz ~ 6 GHz

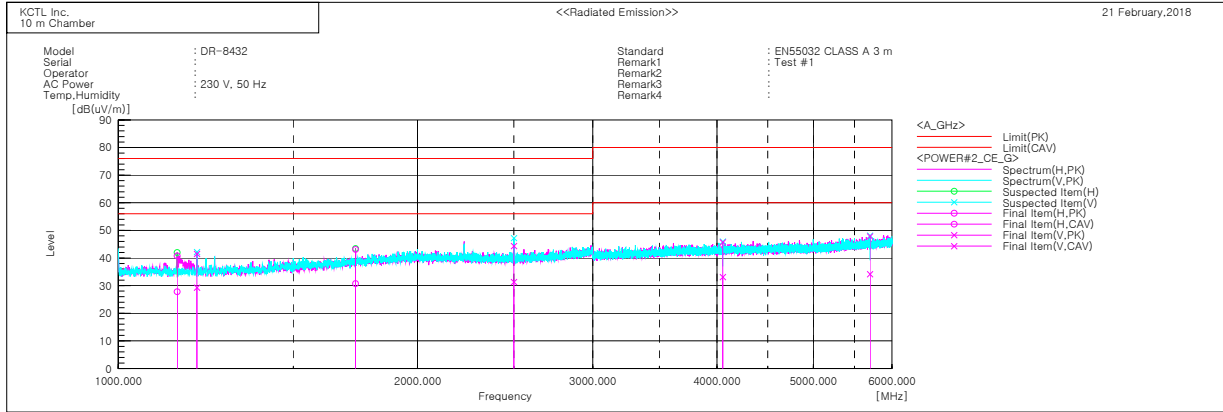

### Final Result

| No. | Frequency [MHz] | (P) | Reading PK [dB(uV)] | Reading CAV [dB(uV)] | c.f [dB(1/m)] | Result PK [dB(uV/m)] | Result CAV [dB(uV/m)] | Limit PK [dB(uV/m)] | Limit AV [dB(uV/m)] | Margin PK [dB] | Margin CAV [dB] | Height [cm] | Angle [deg] |
|-----|-----------------|-----|---------------------|----------------------|---------------|----------------------|-----------------------|---------------------|---------------------|----------------|-----------------|-------------|-------------|
| 1   | 1145.892        | H   | 51.7                | 38.7                 | -10.9         | 40.8                 | 27.8                  | 76.0                | 56.0                | 35.2           | 28.2            | 100.0       | 80.9        |
| 2   | 1199.609        | V   | 52.1                | 39.9                 | -10.6         | 41.5                 | 29.3                  | 76.0                | 56.0                | 34.5           | 26.7            | 100.0       | 184.9       |
| 3   | 1732.511        | H   | 49.0                | 36.6                 | -5.9          | 43.1                 | 30.7                  | 76.0                | 56.0                | 32.9           | 25.3            | 100.0       | 58.7        |
| 4   | 2499.817        | V   | 48.5                | 35.4                 | -4.1          | 44.4                 | 31.3                  | 76.0                | 56.0                | 31.6           | 24.7            | 100.0       | 32.1        |
| 5   | 4055.183        | V   | 43.9                | 31.3                 | 1.8           | 45.7                 | 33.1                  | 80.0                | 60.0                | 34.3           | 26.9            | 100.0       | 26.0        |
| 6   | 5701.501        | V   | 43.0                | 29.4                 | 4.8           | 47.8                 | 34.2                  | 80.0                | 60.0                | 32.2           | 25.8            | 100.0       | 19.9        |

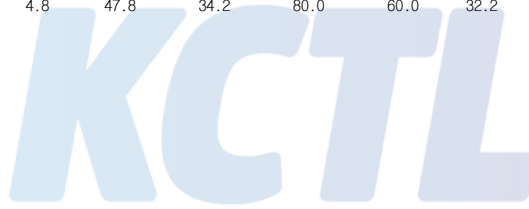

### ◆ Correction(Distance: 3.3 m)

| Frequency [MHz] | (P) | Reading PK [dB(μV)] | Reading CAV [dB(μV)] | c.f [dB(1/m)] | Result PK [dB(μV/m)] | Result CAV [dB(μV/m)] | Limit PK [dB(μV/m)] | Limit CAV [dB(μV/m)] | Margin PK [dB] | Margin CAV [dB] |
|-----------------|-----|---------------------|----------------------|---------------|----------------------|-----------------------|---------------------|----------------------|----------------|-----------------|
| 1145.892        | H   | 51.7                | 38.7                 | -10.1         | 41.6                 | 28.6                  | 76.0                | 56.0                 | 34.4           | 27.4            |
| 1199.609        | V   | 52.1                | 39.9                 | -9.8          | 42.3                 | 30.1                  | 76.0                | 56.0                 | 33.7           | 25.9            |
| 1732.511        | H   | 49.0                | 36.6                 | -5.1          | 43.9                 | 31.5                  | 76.0                | 56.0                 | 32.1           | 24.5            |
| 2499.817        | V   | 48.5                | 35.4                 | -3.3          | 45.2                 | 32.1                  | 76.0                | 56.0                 | 30.8           | 23.9            |
| 4055.183        | V   | 43.9                | 31.3                 | 2.6           | 46.5                 | 33.9                  | 80.0                | 60.0                 | 33.5           | 26.1            |
| 5701.501        | V   | 43.0                | 29.4                 | 5.6           | 48.6                 | 35.0                  | 80.0                | 60.0                 | 31.4           | 25.0            |

This test report shall not be reproduced, except in full, without the written approval.

## 6.3 Harmonics

|                    |                   |                   |             |                |           |
|--------------------|-------------------|-------------------|-------------|----------------|-----------|
| Test specification | EN 61000-3-2:2014 |                   |             |                |           |
| Testing voltage    | 230 V, 50 Hz      |                   |             |                |           |
| Test facility      | EMI Test area(6F) |                   |             |                |           |
| Date               | 2018-02-23        |                   |             |                |           |
| Temperature(°C)    | 20.8 °C           | Humidity (% R.H.) | 27.1 % R.H. | Pressure (kPa) | 101.9 kPa |
| Remarks            | Pass              |                   |             |                |           |

### 6.3.1 Measurement procedure

The equipment is supplied in series with shunt(s)  $R_m$  or current transformer(s) from a source having the same nominal voltage and frequency as the rated supply voltage and frequency of the equipment. Measurements shall be made under normal load, or conditions for adequate heat discharge, and under normal operating conditions. User's operation controls or automatic programmers shall be set to produce the maximum harmonic component, for each successive harmonic component in turn. For the purpose of harmonic current limitation, equipment is classified as follows :

Class A : Equipment not specified in one of the three other Classes shall be considered as Class A equipment.

- Balanced three-phase equipment;
- Household appliances, excluding equipment identified as Class D;
- Tools, excluding portable tools;
- Dimmers for incandescent lamps;
- Audio equipment.

Class B : Portable tools; Arc welding equipment which is not professional equipment.

Class C : Lighting equipment.

Class D : Equipment having a specified power according to 6.2.2 less than or equal to 600 w, of the following types:

- Personal computers and personal computer monitors;
- Television receivers.
- Refrigerators and freezers having one or more variable-speed drives to control compressor motor(s).

**KCTL Inc.**

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR18-SEC0064

Page (35) of (72)

**KCTL**

### 6.3.2 Used equipments

| Equipment                                    | Model no. | Serial no. | Makers | Next Cal. Date | Used                                |
|--|-----------|------------|--------|----------------|-------------------------------------|
| Hamonic / Flicker Meter<br>(AC POWER SOURCE) | 5001IX    | 54894      | C.I.   | 2018.03.21     | <input checked="" type="checkbox"/> |
| Hamonic / Flicker Meter<br>(Analyzer)        | PACS-1    | 72072      | C.I.   | 2018.04.07     | <input checked="" type="checkbox"/> |

### 6.3.3 Photographs of test setup



# KCTL Inc.


65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR18-SEC0064

Page (36) of (72)



## 6.3.4 Measurement result

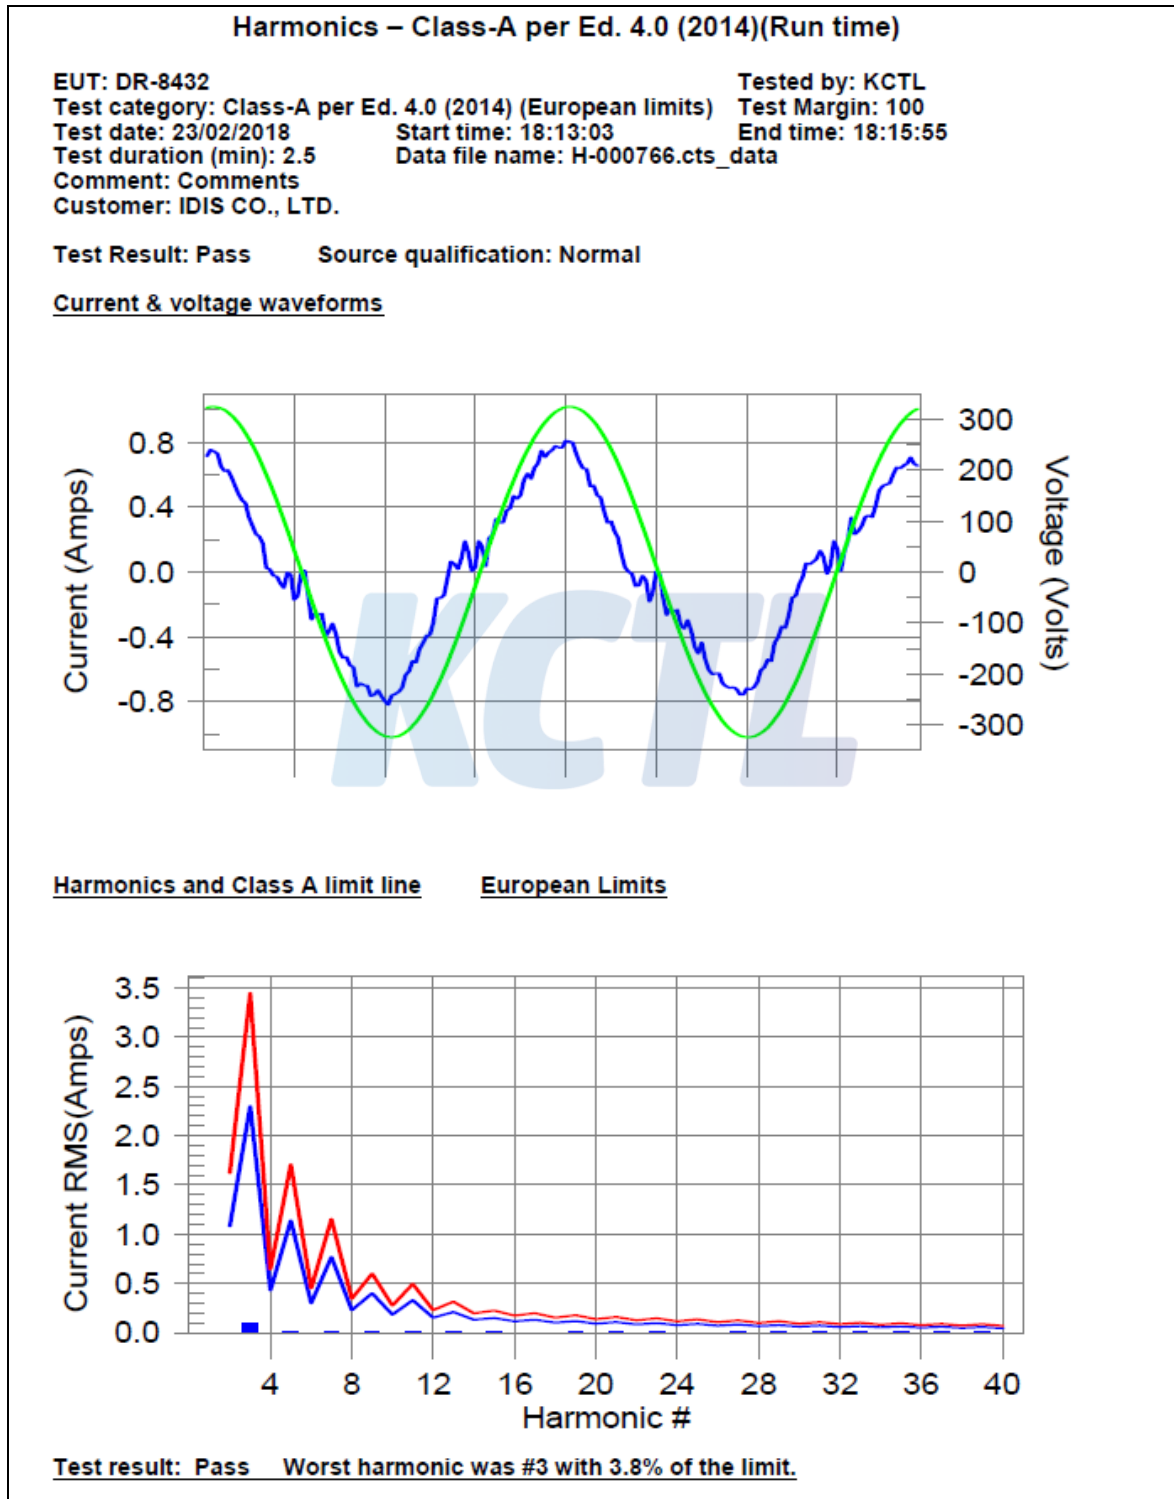

**KCTL Inc.**

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR18-SEC0064

Page (37) of (72)



### Current Test Result Summary (Run time)

EUT: DR-8432 Tested by: KCTL  
 Test category: Class-A per Ed. 4.0 (2014) (European limits) Test Margin: 100  
 Test date: 23/02/2018 Start time: 18:13:03 End time: 18:15:55  
 Test duration (min): 2.5 Data file name: H-000766.cts\_data  
 Comment: Comments  
 Customer: IDIS CO., LTD.

Test Result: Pass Source qualification: Normal  
 THC(A): 0.092 I-THD(%): 21.3 POHC(A): 0.000 POHC Limit(A): 0.251  
 Highest parameter values during test:

|                       |                      |
|-----------------------|----------------------|
| V_RMS (Volts): 229.41 | Frequency(Hz): 50.00 |
| I_Peak (Amps): 0.867  | I_RMS (Amps): 0.470  |
| I_Fund (Amps): 0.454  | Crest Factor: 1.862  |
| Power (Watts): 99.8   | Power Factor: 0.937  |

| Harm# | Harms(avg) | 100%Limit | %of Limit | Harms(max) | 150%Limit | %of Limit | Status |
|-------|------------|-----------|-----------|------------|-----------|-----------|--------|
| 2     | 0.000      | 1.080     | N/A       | 0.001      | 1.620     | N/A       | Pass   |
| 3     | 0.088      | 2.300     | 3.8       | 0.088      | 3.450     | 2.6       | Pass   |
| 4     | 0.000      | 0.430     | N/A       | 0.000      | 0.645     | N/A       | Pass   |
| 5     | 0.015      | 1.140     | 1.3       | 0.016      | 1.710     | 0.9       | Pass   |
| 6     | 0.000      | 0.300     | N/A       | 0.000      | 0.450     | N/A       | Pass   |
| 7     | 0.013      | 0.770     | 1.7       | 0.013      | 1.155     | 1.1       | Pass   |
| 8     | 0.000      | 0.230     | N/A       | 0.000      | 0.345     | N/A       | Pass   |
| 9     | 0.011      | 0.400     | 2.8       | 0.013      | 0.600     | 2.2       | Pass   |
| 10    | 0.000      | 0.184     | N/A       | 0.000      | 0.276     | N/A       | Pass   |
| 11    | 0.007      | 0.330     | 2.1       | 0.007      | 0.495     | 1.4       | Pass   |
| 12    | 0.000      | 0.153     | N/A       | 0.000      | 0.230     | N/A       | Pass   |
| 13    | 0.005      | 0.210     | N/A       | 0.005      | 0.315     | N/A       | Pass   |
| 14    | 0.000      | 0.131     | N/A       | 0.000      | 0.197     | N/A       | Pass   |
| 15    | 0.005      | 0.150     | 3.5       | 0.007      | 0.225     | 3.0       | Pass   |
| 16    | 0.000      | 0.115     | N/A       | 0.000      | 0.173     | N/A       | Pass   |
| 17    | 0.002      | 0.132     | N/A       | 0.002      | 0.198     | N/A       | Pass   |
| 18    | 0.000      | 0.102     | N/A       | 0.000      | 0.153     | N/A       | Pass   |
| 19    | 0.004      | 0.118     | N/A       | 0.004      | 0.178     | N/A       | Pass   |
| 20    | 0.000      | 0.092     | N/A       | 0.000      | 0.138     | N/A       | Pass   |
| 21    | 0.002      | 0.107     | N/A       | 0.002      | 0.161     | N/A       | Pass   |
| 22    | 0.000      | 0.084     | N/A       | 0.000      | 0.125     | N/A       | Pass   |
| 23    | 0.004      | 0.098     | N/A       | 0.004      | 0.147     | N/A       | Pass   |
| 24    | 0.000      | 0.077     | N/A       | 0.000      | 0.115     | N/A       | Pass   |
| 25    | 0.001      | 0.090     | N/A       | 0.004      | 0.135     | N/A       | Pass   |
| 26    | 0.000      | 0.071     | N/A       | 0.000      | 0.107     | N/A       | Pass   |
| 27    | 0.002      | 0.083     | N/A       | 0.003      | 0.125     | N/A       | Pass   |
| 28    | 0.001      | 0.066     | N/A       | 0.001      | 0.099     | N/A       | Pass   |
| 29    | 0.003      | 0.078     | N/A       | 0.003      | 0.116     | N/A       | Pass   |
| 30    | 0.000      | 0.061     | N/A       | 0.000      | 0.092     | N/A       | Pass   |
| 31    | 0.003      | 0.073     | N/A       | 0.004      | 0.109     | N/A       | Pass   |
| 32    | 0.000      | 0.058     | N/A       | 0.001      | 0.086     | N/A       | Pass   |
| 33    | 0.003      | 0.068     | N/A       | 0.003      | 0.102     | N/A       | Pass   |
| 34    | 0.000      | 0.054     | N/A       | 0.000      | 0.081     | N/A       | Pass   |
| 35    | 0.002      | 0.064     | N/A       | 0.003      | 0.096     | N/A       | Pass   |
| 36    | 0.000      | 0.051     | N/A       | 0.000      | 0.077     | N/A       | Pass   |
| 37    | 0.003      | 0.061     | N/A       | 0.004      | 0.091     | N/A       | Pass   |
| 38    | 0.000      | 0.048     | N/A       | 0.000      | 0.073     | N/A       | Pass   |
| 39    | 0.004      | 0.058     | N/A       | 0.005      | 0.087     | N/A       | Pass   |
| 40    | 0.000      | 0.046     | N/A       | 0.000      | 0.069     | N/A       | Pass   |



**KCTL Inc.**

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR18-SEC0064

Page (38) of (72)



### Voltage Source Verification Data (Run time)

EUT: DR-8432 Tested by: KCTL  
 Test category: Class-A per Ed. 4.0 (2014) (European limits) Test Margin: 100  
 Test date: 23/02/2018 Start time: 18:13:03 End time: 18:15:55  
 Test duration (min): 2.5 Data file name: H-000766.cts\_data  
 Comment: Comments  
 Customer: IDIS CO., LTD.

Test Result: Pass Source qualification: Normal

Highest parameter values during test:

|                        |                      |
|------------------------|----------------------|
| Voltage (Vrms): 229.41 | Frequency(Hz): 50.00 |
| I Peak (Amps): 0.867   | I RMS (Amps): 0.470  |
| I Fund (Amps): 0.454   | Crest Factor: 1.862  |
| Power (Watts): 99.8    | Power Factor: 0.937  |

| Harm# | Harmonics V-rms | Limit V-rms | % of Limit | Status |
|-------|-----------------|-------------|------------|--------|
| 2     | 0.102           | 0.459       | 22.20      | OK     |
| 3     | 0.523           | 2.065       | 25.34      | OK     |
| 4     | 0.025           | 0.459       | 5.48       | OK     |
| 5     | 0.021           | 0.918       | 2.26       | OK     |
| 6     | 0.021           | 0.459       | 4.62       | OK     |
| 7     | 0.027           | 0.688       | 3.99       | OK     |
| 8     | 0.014           | 0.459       | 2.98       | OK     |
| 9     | 0.018           | 0.459       | 3.97       | OK     |
| 10    | 0.015           | 0.459       | 3.38       | OK     |
| 11    | 0.030           | 0.229       | 13.07      | OK     |
| 12    | 0.014           | 0.229       | 6.11       | OK     |
| 13    | 0.023           | 0.229       | 10.04      | OK     |
| 14    | 0.012           | 0.229       | 5.13       | OK     |
| 15    | 0.008           | 0.229       | 3.41       | OK     |
| 16    | 0.010           | 0.229       | 4.54       | OK     |
| 17    | 0.011           | 0.229       | 4.77       | OK     |
| 18    | 0.014           | 0.229       | 5.89       | OK     |
| 19    | 0.014           | 0.229       | 6.25       | OK     |
| 20    | 0.005           | 0.229       | 2.27       | OK     |
| 21    | 0.009           | 0.229       | 4.09       | OK     |
| 22    | 0.009           | 0.229       | 3.73       | OK     |
| 23    | 0.007           | 0.229       | 2.87       | OK     |
| 24    | 0.010           | 0.229       | 4.21       | OK     |
| 25    | 0.009           | 0.229       | 3.97       | OK     |
| 26    | 0.011           | 0.229       | 4.59       | OK     |
| 27    | 0.005           | 0.229       | 2.29       | OK     |
| 28    | 0.008           | 0.229       | 3.32       | OK     |
| 29    | 0.005           | 0.229       | 1.99       | OK     |
| 30    | 0.011           | 0.229       | 4.58       | OK     |
| 31    | 0.006           | 0.229       | 2.41       | OK     |
| 32    | 0.007           | 0.229       | 2.87       | OK     |
| 33    | 0.008           | 0.229       | 3.62       | OK     |
| 34    | 0.003           | 0.229       | 1.48       | OK     |
| 35    | 0.008           | 0.229       | 3.27       | OK     |
| 36    | 0.004           | 0.229       | 1.65       | OK     |
| 37    | 0.006           | 0.229       | 2.41       | OK     |
| 38    | 0.009           | 0.229       | 4.04       | OK     |
| 39    | 0.022           | 0.229       | 9.63       | OK     |
| 40    | 0.009           | 0.229       | 3.75       | OK     |

## 6.4 Flicker

|                    |                   |                   |             |                |           |
|--------------------|-------------------|-------------------|-------------|----------------|-----------|
| Test specification | EN 61000-3-3:2013 |                   |             |                |           |
| Testing voltage    | 230 V, 50 Hz      |                   |             |                |           |
| Test facility      | EMI Test area(6F) |                   |             |                |           |
| Date               | 2018-02-23        |                   |             |                |           |
| Temperature(°C)    | 20.8 °C           | Humidity (% R.H.) | 27.1 % R.H. | Pressure (kPa) | 101.9 kPa |
| Remarks            | Pass              |                   |             |                |           |

### 6.4.1 Measurement procedure

EUT was connected to the power analyzer system.

Measurement was performed to obtain the desired flicker parameters.

The measuring time depends on which parameters are to be measured.

$$P_{ft} = 2 \text{ h}$$

$$P_{st} = 10 \text{ min}$$

Controls and automatic programs shall be set to produce the most unfavorable sequence of voltage changes, using only those combinations of controls and programs are mentioned by the manufacturer in the instruction manual.



**KCTL Inc.**

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR18-SEC0064

Page (40) of (72)

**KCTL**

### 6.4.2 Used equipments

| Equipment                                    | Model no. | Serial no. | Makers | Next Cal. Date | Used                                |
|--|-----------|------------|--------|----------------|-------------------------------------|
| Hamonic / Flicker Meter<br>(AC POWER SOURCE) | 5001IX    | 54894      | C.I.   | 2018.03.21     | <input checked="" type="checkbox"/> |
| Hamonic / Flicker Meter<br>(Analyzer)        | PACS-1    | 72072      | C.I.   | 2018.04.07     | <input checked="" type="checkbox"/> |

### 6.4.3 Photographs of test setup



**KCTL Inc.**


65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR18-SEC0064

Page (41) of (72)



#### 6.4.4 Measurement result

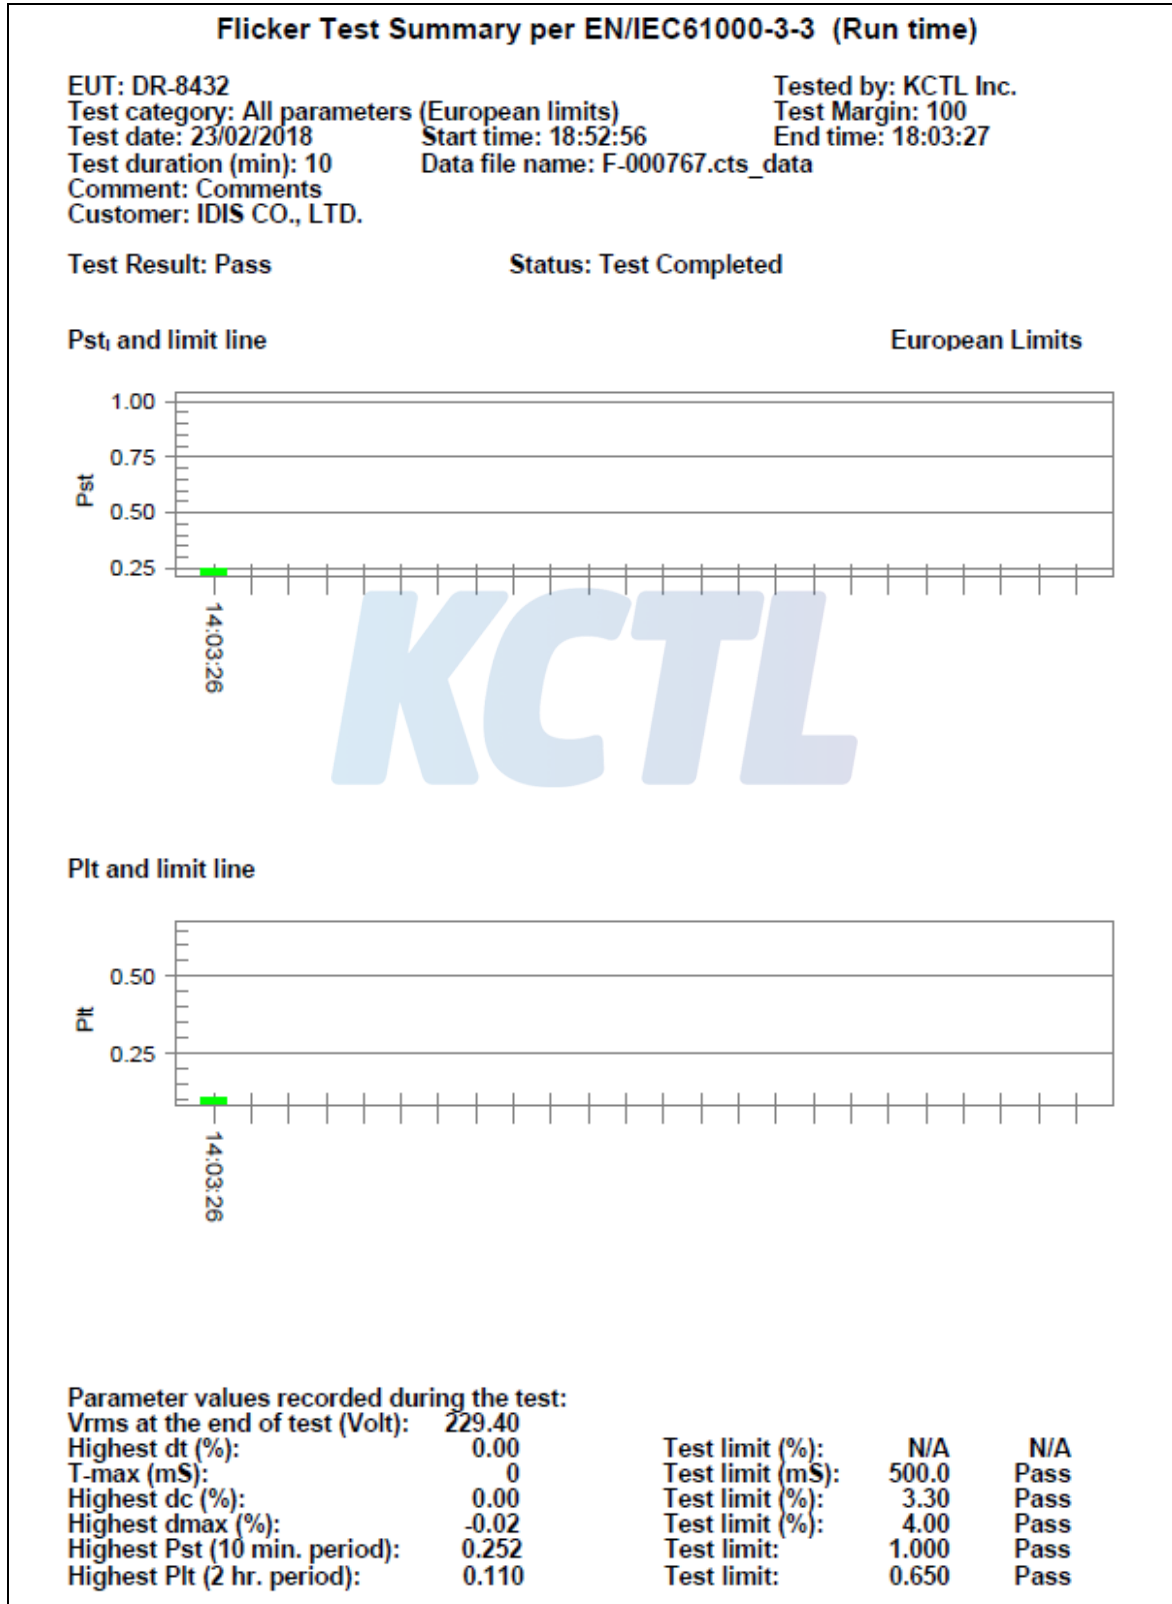

This test report shall not be reproduced, except in full, without the written approval.

## 6.5 Electrostatic Discharge

|                                     |  |   |   |                |           |
|-------------------------------------|--|---|---|----------------|-----------|
| Test specification                  | EN 61000-4-2:2009  |   |   |                |           |
| Test level                          | <input checked="" type="checkbox"/> Contact: $\pm 6$ kV<br><input checked="" type="checkbox"/> Air: $\pm 2$ kV, $\pm 4$ kV, $\pm 8$ kV<br><input checked="" type="checkbox"/> HCP: $\pm 6$ kV<br><input checked="" type="checkbox"/> VCP: $\pm 6$ kV |   |   |                |           |
| Discharge impedance                 | 330 $\Omega$ / 150 pF  |   |   |                |           |
| Number of discharge (Each polarity) | <input checked="" type="checkbox"/> Contact: 10  | <input checked="" type="checkbox"/> Air: 10 | <input checked="" type="checkbox"/> HCP / VCP: 10 |                |           |
| Interval between discharges         | 1 s  |   |   |                |           |
| Testing voltage                     | 230 V, 50 Hz   |   |   |                |           |
| Test facility                       | Shielded room (6F)   |   |   |                |           |
| Date                                | 2018-03-06   |   |   |                |           |
| Temperature( $^{\circ}$ C)          | 21.5 $^{\circ}$ C  | Humidity (% R.H.)                           | 49.2 % R.H.                                       | Pressure (kPa) | 101.7 kPa |
| Remarks                             | Pass<br>-There shall be no damage, malfunction or change of status due to the conditioning. Flickering of an indicator during the conditioning is permissible, providing that there is no residual change in the EUT or any change in outputs.       |   |   |                |           |

### 6.5.1 Measurement procedure

A ground reference plane was located on the floor, and connected to earth via a low Impedance connection. The return cable of the ESD generator was connected to the reference plane. In case of floor standing equipment, EUT was placed on the reference plane on 0.1 m of insulating Support. In case of table top equipment, EUT was placed on a wooden table 0.8 m above the reference grounded floor. A horizontal coupling plane (HCP) was placed on the table, and Connected to the reference plane via a 470 k $\Omega$  resistor located in each end (0.5 mm insulating support between EUT and HCP). In both cases a vertical coupling plane(VCP) OF 0.5 X 0.5 m was located 0.1 m from the EUT's sides. The VCP was connected to the reference plane in the same matter as the HCP.

### 6.5.2 Used equipments

| Equipment     | Model no. | Serial no. | Makers  | Next Cal. Date | Used                                |
|---------------|-----------|------------|---------|----------------|-------------------------------------|
| ESD SIMULATOR | ONYX30    | 183121     | HAEFELY | 2018.09.04     | <input checked="" type="checkbox"/> |
| ESD TESTER    | PESD1600  | H011309    | HAEFELY | 2018.05.04     | <input type="checkbox"/>            |
| HCP           | -         | -          | -       | -              | <input checked="" type="checkbox"/> |
| VCP           | -         | -          | -       | -              | <input checked="" type="checkbox"/> |

### 6.5.3 Photographs of test setup




6.5.4 Measurement result

Electrostatic Discharge (Test Point)

Air discharge



Contact discharge

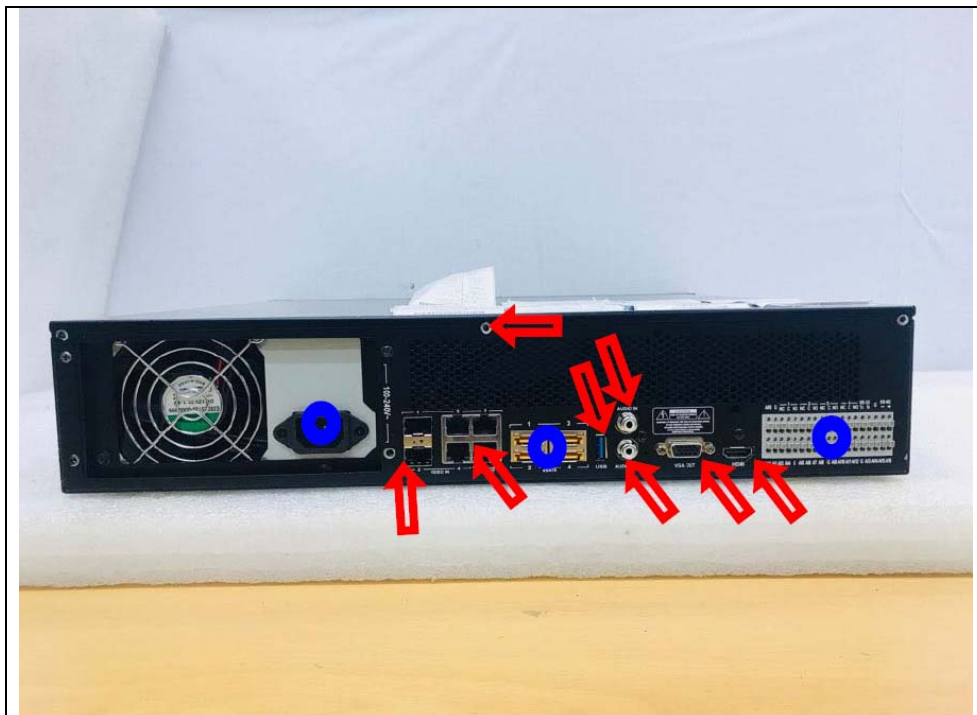



**KCTL Inc.**

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR18-SEC0064  
Page (45) of (72)

**KCTL**



**KCTL Inc.**

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR18-SEC0064

Page (46) of (72)

**HCP/VCP discharge**

| Location(EUT)     | Applied level ( $\pm$ ) | Result |
|-------------------|-------------------------|--------|
| HCP (All 4 sides) | $\pm 6$ kV              | Pass   |
| VCP (All 4 sides) | $\pm 6$ kV              | Pass   |


**Contact discharge**

| Location(EUT) | Applied level ( $\pm$ ) | Result |
|---------------|-------------------------|--------|
| Front         | $\pm 6$ kV              | Pass   |
| Rear          | $\pm 6$ kV              | Pass   |
| Left          | $\pm 6$ kV              | Pass   |
| Right         | $\pm 6$ kV              | Pass   |

**Air discharge**

| Location(EUT) | Applied level ( $\pm$ )            | Result |
|---------------|------------------------------------|--------|
| Front         | $\pm 2$ kV, $\pm 4$ kV, $\pm 8$ kV | Pass   |
| Rear          | $\pm 2$ kV, $\pm 4$ kV, $\pm 8$ kV | Pass   |
| Left          | $\pm 2$ kV, $\pm 4$ kV, $\pm 8$ kV | -      |
| Right         | $\pm 2$ kV, $\pm 4$ kV, $\pm 8$ kV | -      |



|   |   |   |
|---|---|---|
| <b>KCTL Inc.</b><br>65, Sinwon-ro, Yeongtong-gu,<br>Suwon-si, Gyeonggi-do, 16677, Korea<br>TEL: 82-31-285-0894 FAX: 82-505-299-8311<br><a href="http://www.kctl.co.kr">www.kctl.co.kr</a> | Report No.:<br><b>KR18-SEC0064</b><br>Page (47) of (72) |  |
|---|---|---|

## 6.6 Radio Frequency Electromagnetic Fields

|                         |  |                   |             |                |           |
|-------------------------|--|-------------------|-------------|----------------|-----------|
| Test specification      | EN 61000-4-3:2006 /A2:2010   |                   |             |                |           |
| Tested frequency        | 80 MHz ~ 1 GHz, 1 GHz ~ 2.7 GHz  |                   |             |                |           |
| Test level & Modulation | 1 V/m, 3 V/m, 10 V/m, 80 % Amplitude Modulation (1 kHz)<br>1 V/m, 3 V/m, 10 V/m, Pulse Modulation (1 Hz (0.5 s ON: 0.5s OFF))  |                   |             |                |           |
| Frequency Step          | 1 % step   |                   |             |                |           |
| Dwell time              | 3 s  |                   |             |                |           |
| Distance                | 3 m from EUT to tip of antenna   |                   |             |                |           |
| Testing voltage         | 230 V, 50 Hz   |                   |             |                |           |
| Test facility           | 6F Fully anechoic chamber (3 m)  |                   |             |                |           |
| Date                    | 2018-03-11   |                   |             |                |           |
| Temperature (°C)        | 19.5 °C  | Humidity (% R.H.) | 28.6 % R.H. | Pressure (kPa) | 101.9 kPa |
| Remarks                 | Pass<br>-There shall be no damage, malfunction or change of status due to the conditioning. Flickering of an indicator during the conditioning is permissible, providing that there is no residual change in the EUT or any change in outputs. |                   |             |                |           |

### 6.6.1 Measurement procedure

The test was performed at 3 m full anechoic chamber.


For floor standing equipment, the EUT was standing on the floor.

For tabletop equipment, the EUT was located on a wooden table 0.8 m above the floor.

The EUT was tested all sides, horizontal and vertical polarization.


### 6.6.2 Used equipments

| Equipment                                    | Model no. | Serial no. | Makers       | Next Cal. Date | Used |
|--|-----------|------------|--------------|----------------|------|
| POWER METER                                  | PM2002    | 302852     | AR           | 2018.08.25     | ☒    |
| POWER SENSOR                                 | PH2000    | 303224     | AR           | 2018.08.25     | ☒    |
| POWER SENSOR                                 | PH2000    | 311217     | AR           | 2018.08.25     | ☒    |
| DUAL DIRECTIONAL COUPLER                     | DC6180    | 303976     | AR           | 2018.08.25     | ☒    |
| Dual Directional Coupler                     | DC7200A   | 0349434    | AR           | 2018.08.16     | ☒    |
| Signal Generator                             | SMB100A   | 101737     | R&S          | 2018.05.04     | ☒    |
| BROADBAND AMPLIFIER                          | BBA 100   | 100996-1   | R&S          | -              | ☒    |
| RF Power Amplifier                           | 100S1G6AB | 0349688    | AR           | -              | ☒    |
| Broadband Ant.                               | LPDA-0803 | 130269     | ETS-LINDGREN | -              | ☒    |
| Antenna master                               | -         | -          | -            | -              | ☒    |
| Stacked Log.-Per. Antenna<br>0.1 GHz - 9 GHz | STLP9149  | 9149-511   | SCHWARZBECK  | -              | ☒    |

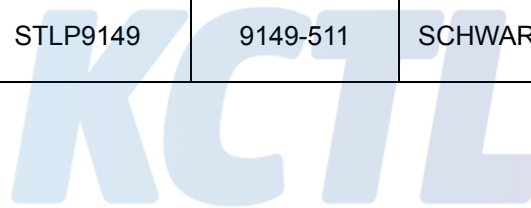


### 6.6.3 Photographs of test setup

[80 MHz ~ 1 GHz]

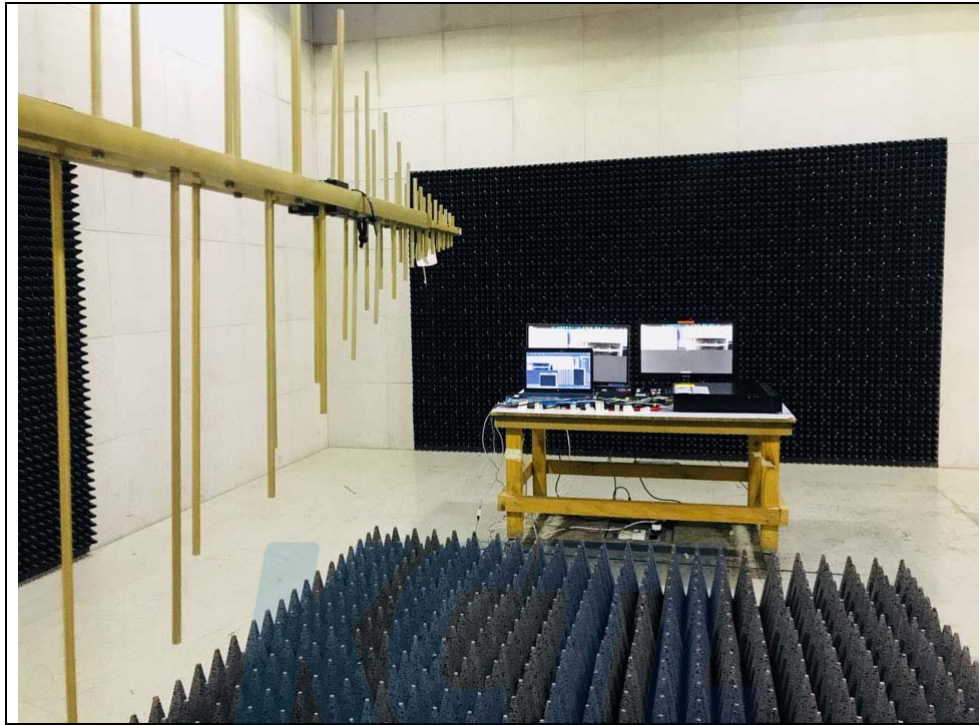

[1 GHz ~ 2.7 GHz]

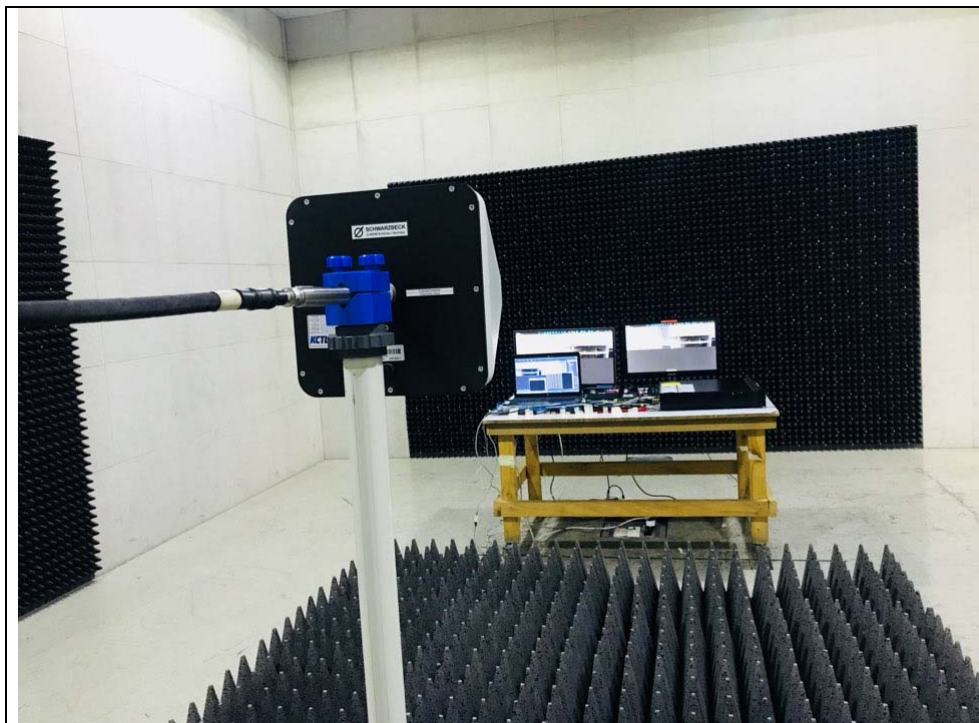

6.6.4 Measurement result

| Location(EUT) | Antenna polarization | Result |
|---------------|----------------------|--------|
| Front side    | Horizontal           | Pass   |
|               | Vertical             | Pass   |
| Rear side     | Horizontal           | Pass   |
|               | Vertical             | Pass   |
| Left side     | Horizontal           | Pass   |
|               | Vertical             | Pass   |
| Right side    | Horizontal           | Pass   |
|               | Vertical             | Pass   |



## 6.7 Electric Fast Transient/BURST

|                         |  |                   |             |                |           |
|-------------------------|--|-------------------|-------------|----------------|-----------|
| Test specification      | EN 61000-4-4:2012  |                   |             |                |           |
| Coupling                | <input checked="" type="checkbox"/> AC Main<br><input checked="" type="checkbox"/> Signal/Control: Clamp<br><input checked="" type="checkbox"/> Telecommunication: Clamp   |                   |             |                |           |
| Test level              | <input checked="" type="checkbox"/> AC Main: $\pm 2$ kV Peak<br><input checked="" type="checkbox"/> Signal/Control: $\pm 1$ kV Peak<br><input checked="" type="checkbox"/> Telecommunication: $\pm 1$ kV Peak                                  |                   |             |                |           |
| Repetition frequency    | 100 kHz, Tr/Th = 5 / 50 ns   |                   |             |                |           |
| Coupling time (Minimum) | 60 s   |                   |             |                |           |
| Testing voltage         | 230 V, 50 Hz   |                   |             |                |           |
| Test facility           | Shielded room (6F)   |                   |             |                |           |
| Date                    | 2018-03-05   |                   |             |                |           |
| Temperature(°C)         | 20.5 °C  | Humidity (% R.H.) | 30.2 % R.H. | Pressure (kPa) | 101.7 kPa |
| Remarks                 | Pass<br>-There shall be no damage, malfunction or change of status due to the conditioning. Flickering of an indicator during the conditioning is permissible, providing that there is no residual change in the EUT or any change in outputs. |                   |             |                |           |

### 6.7.1 Measurement procedure

A ground reference plane was located on the floor.

EFT generator was connected to reference ground plane via low impedance connection.

For floor standing equipment, EUT was placed on a 0.1 m wooden table.

For tabletop equipment, EUT was placed on a 0.1 m above the ground reference plane.

Test generator and coupling/decoupling network was placed on, and bounded to, the ground reference plane. When using the coupling clamp, the minimum distance between the coupling plates and all other conductive surfaces, except the ground reference plane beneath the coupling clamp, Shall be 0.5 m.

**KCTL Inc.**

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR18-SEC0064


Page (52) of (72)

**KCTL**

### 6.7.2 Used equipments

| Equipment                 | Model no.     | Serial no.  | Makers  | Next Cal. Date | Used                                |
|---------------------------|---------------|-------------|---------|----------------|-------------------------------------|
| ULTRA COMPACT SIMULATOR   | UCS 500-M6BS1 | V0545100858 | EM TEST | 2018.04.07     | <input checked="" type="checkbox"/> |
| ULTRA COMPACT SIMULATOR   | UCS 500M      | 0701-03     | EM TEST | 2018.08.24     | <input type="checkbox"/>            |
| Capacitive Coupling clamp | CA HFK        | 0001        | EM TEST | 2018.08.24     | <input checked="" type="checkbox"/> |

### 6.7.3 Photographs of test setup

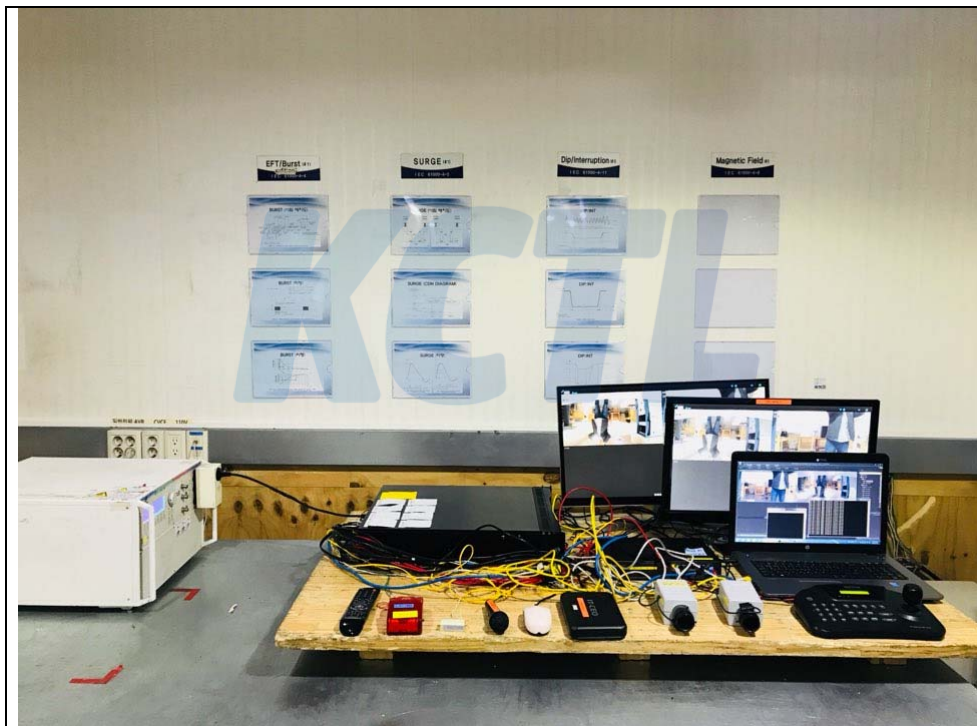



**KCTL Inc.**

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR18-SEC0064

Page (53) of (72)

**KCTL**

#### 6.7.4 Measurement result

##### AC Main

| Coupling point | (+)    | (-)    | Result |
|----------------|--------|--------|--------|
| L-N-PE         | + 2 kV | - 2 kV | Pass   |

##### Signal/Control

| Coupling point | (+)    | (-)    | Result |
|----------------|--------|--------|--------|
| Alarm In/Out   | + 1 kV | - 1 kV | Pass   |
| RS-485         | + 1 kV | - 1 kV | Pass   |
| Audio In/Out   | + 1 kV | - 1 kV | Pass   |
| RS-232         | + 1 kV | - 1 kV | Pass   |

##### Telecommunication

| Coupling point   | (+)    | (-)    | Result |
|------------------|--------|--------|--------|
| Vidoe In #3(LAN) | + 1 kV | - 1 kV | Pass   |
| LAN(RJ-45)       | + 1 kV | - 1 kV | Pass   |

This test report shall not be reproduced, except in full, without the written approval.



## 6.8 Surge

|                    |  |                      |  |                   |           |
|--------------------|--|----------------------|--|-------------------|-----------|
| Test specification | EN 61000-4-5:2014  |                      |  |                   |           |
| Coupling           | <input checked="" type="checkbox"/> AC Main: Direct<br><input checked="" type="checkbox"/> Signal: Direct<br><input checked="" type="checkbox"/> Telecommunication: CDN  |                      |  |                   |           |
| Test level         | <input checked="" type="checkbox"/> AC Main: <input checked="" type="checkbox"/> Differential mode: $\pm 0.5 \text{ kV}, \pm 1 \text{ kV}$<br><input checked="" type="checkbox"/> Common mode: $\pm 0.5 \text{ kV}, \pm 1 \text{ kV}, \pm 2 \text{ kV}$<br><input checked="" type="checkbox"/> Signal/Control: $\pm 0.5 \text{ kV}, \pm 1 \text{ kV}$<br><input checked="" type="checkbox"/> Telecommunication: $\pm 0.5 \text{ kV}, \pm 1 \text{ kV}$ |                      |  |                   |           |
| Coupling Impedance | <input checked="" type="checkbox"/> Differential mode: $18 \mu\text{F}$<br><input checked="" type="checkbox"/> $40 \Omega + 0.5 \mu\text{F}$   |                      | <input checked="" type="checkbox"/> Common mode: $10 \Omega + 9 \mu\text{F}$<br><input checked="" type="checkbox"/> Direct |                   |           |
| Surge pulse shape  | Tr/Th = 1.2 / 50 $\mu\text{s}$   |                      |  |                   |           |
| Angles             | 0°, 90°, 180°, 270°  |                      |  |                   |           |
| Number of surge    | 5  |                      |  |                   |           |
| Coupling time      | 60 s   |                      |  |                   |           |
| Testing voltage    | 230 V, 50 Hz   |                      |  |                   |           |
| Test facility      | Shielded room (6F)   |                      |  |                   |           |
| Date               | 2018-03-05   |                      |  |                   |           |
| Temperature(°C)    | 21.0 °C  | Humidity<br>(% R.H.) | 30.8 % R.H.  | Pressure<br>(kPa) | 101.7 kPa |
| Remarks            | Pass<br>-There shall be no damage, malfunction or change of status due to the conditioning. Flickering of an indicator during the conditioning is permissible, providing that there is no residual change in the EUT or any change in outputs.   |                      |  |                   |           |


### 6.8.1 Measurement procedure

A ground reference plane was located on the floor. SURGE generator was connected to reference ground plane via low impedance connection. For floor standing equipment & table top equipment, EUT was placed on a wooden table.

### 6.8.2 Used equipments

| Equipment                     | Model no.     | Serial no.  | Makers  | Next Cal. Date | Used                                |
|-------------------------------|---------------|-------------|---------|----------------|-------------------------------------|
| ULTRA COMPACT SIMULATOR       | UCS 500-M6BS1 | V0545100858 | EM TEST | 2018.04.07     | <input checked="" type="checkbox"/> |
| ULTRA COMPACT SIMULATOR       | UCS500M       | 0701-03     | EM TEST | 2018.08.24     | <input type="checkbox"/>            |
| ULTRA COMPACT SIMULATOR       | UCS500N5V     | P1429136861 | EM TEST | 2018.08.24     | <input type="checkbox"/>            |
| COUPLING & DECOUPLING NETWORK | CNV 508 N1    | V1108108861 | EM TEST | 2018.08.25     | <input checked="" type="checkbox"/> |

### 6.8.3 Photographs of test setup

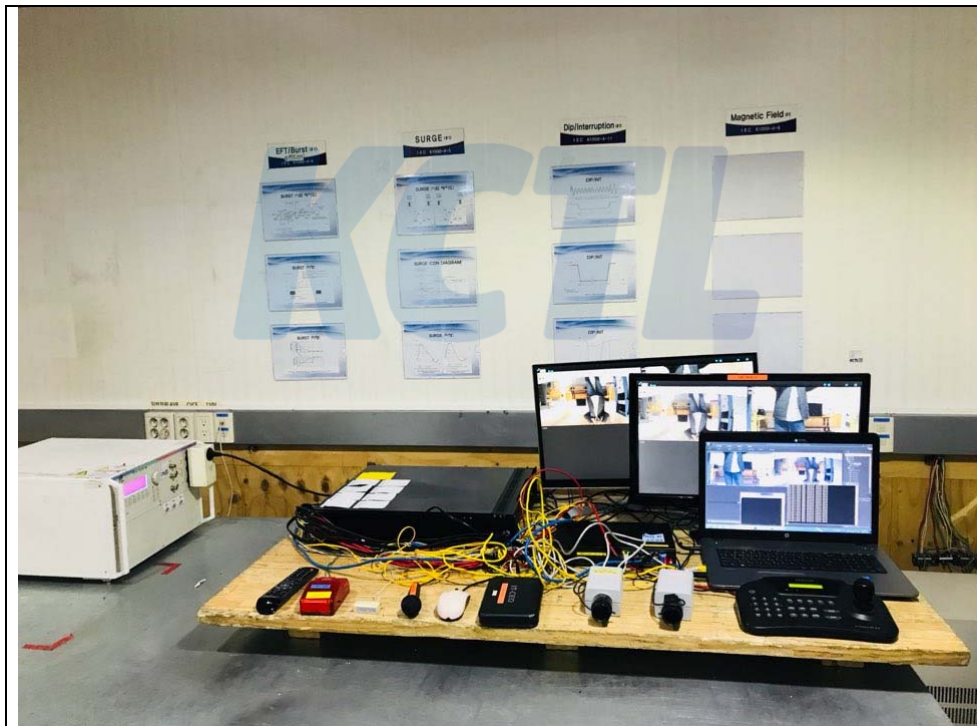

**KCTL Inc.**

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR18-SEC0064  
Page (56) of (72)



**KCTL Inc.**

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR18-SEC0064

Page (57) of (72)



#### 6.8.4 Measurement result

##### AC Main


| Coupling point | (+)                      | (-)                      | Result |
|----------------|--------------------------|--------------------------|--------|
| L-N            | + 0.5 kV, + 1 kV         | - 0.5 kV, - 1 kV         | Pass   |
| L-PE           | + 0.5 kV, + 1 kV, + 2 kV | - 0.5 kV, - 1 kV, - 2 kV | Pass   |
| N-PE           | + 0.5 kV, + 1 kV, + 2 kV | - 0.5 kV, - 1 kV, - 2 kV | Pass   |

##### Signal/Control

| Coupling point | (+)              | (-)              | Result |
|----------------|------------------|------------------|--------|
| Alarm In/Out   | + 0.5 kV, + 1 kV | - 0.5 kV, - 1 kV | Pass   |
| RS-485         | + 0.5 kV, + 1 kV | - 0.5 kV, - 1 kV | Pass   |
| Audio In/Out   | + 0.5 kV, + 1 kV | - 0.5 kV, - 1 kV | Pass   |
| RS-232         | + 0.5 kV, + 1 kV | - 0.5 kV, - 1 kV | Pass   |

##### Telecommunication

| Coupling point   | (+)              | (-)              | Result |
|------------------|------------------|------------------|--------|
| Vidoe In #3(LAN) | + 0.5 kV, + 1 kV | - 0.5 kV, - 1 kV | Pass   |
| LAN(RJ-45)       | + 0.5 kV, + 1 kV | - 0.5 kV, - 1 kV | Pass   |

|   |   |   |
|---|---|---|
| <b>KCTL Inc.</b><br>65, Sinwon-ro, Yeongtong-gu,<br>Suwon-si, Gyeonggi-do, 16677, Korea<br>TEL: 82-31-285-0894 FAX: 82-505-299-8311<br><a href="http://www.kctl.co.kr">www.kctl.co.kr</a> | Report No.:<br><b>KR18-SEC0064</b><br>Page (58) of (72) |  |
|---|---|---|

## 6.9 Conducted Immunity

|                         |                 |  |                   |             |               |           |
|-------------------------|-----------------|--|-------------------|-------------|---------------|-----------|
| Test specification      |                 | EN 61000-4-6:2014  |                   |             |               |           |
| Tested frequency        |                 | 0.15 MHz ~ 100 MHz   |                   |             |               |           |
| Test level & Modulation |                 | 1 V/m, 3 V/m, 10 V/m, 80 % Amplitude Modulation (1 kHz)<br>1 V/m, 3 V/m, 10 V/m, Pulse Modulation (1 Hz (0.5 s ON: 0.5s OFF))  |                   |             |               |           |
| Frequency Step          |                 | 1 % step   |                   |             |               |           |
| Dwell time              |                 | 3 s  |                   |             |               |           |
| Coupling method         |                 | <input checked="" type="checkbox"/> AC Main: CDN(M3)<br><input checked="" type="checkbox"/> Signal/Control: Clamp, CDN(T8 RJ45)<br><input checked="" type="checkbox"/> Telecommunication: CDN(T8-RJ45)   |                   |             |               |           |
| Testing voltage         |                 | 230 V, 50 Hz   |                   |             |               |           |
| Test facility           |                 | Shielded room (6F)   |                   |             |               |           |
| Date                    |                 | 2018-03-07 / 2018-03-08  |                   |             |               |           |
| 2018-03-07              | Temperature(°C) | 20.2 °C  | Humidity (% R.H.) | 32.6 % R.H. | Pressure(kPa) | 101.7 kPa |
| 2018-03-08              |                 | 20.5 °C  |                   | 27.4 % R.H. |               | 101.8 kPa |
| Remarks                 |                 | Pass<br>-There shall be no damage, malfunction or change of status due to the conditioning. Flickering of an indicator during the conditioning is permissible, providing that there is no residual change in the EUT or any change in outputs. |                   |             |               |           |

### 6.9.1 Measurement procedure

A ground reference plane was located on the floor.

The test was performed on a ground reference plane on a 0.1 m wooden table.

This test were performed using CDN for mains, clamp for signal and injection probe.

The frequency range was swept from 0.15 MHz to 80 MHz. This frequency range was Modulated with 1 kHz sine wave at 80 %.

The signal generators provided the modulated frequency at a 1 % step size.


The power and all network cable, I/O cables longer than 3 m length were tested.



### 6.9.2 Used equipments

| Equipment                | Model no.            | Serial no.  | Makers            | Next Cal. Date | Used                                |
|--------------------------|----------------------|-------------|-------------------|----------------|-------------------------------------|
| POWER SENSOR             | NRP-Z91              | 103183      | R&S               | 2018.08.25     | <input checked="" type="checkbox"/> |
| POWER SENSOR             | NRP-Z91              | 103184      | R&S               | 2018.08.25     | <input checked="" type="checkbox"/> |
| C.D.N                    | CDN L-801<br>M2 / M3 | 2936        | EM TEST           | 2018.08.24     | <input checked="" type="checkbox"/> |
| C.D.N                    | CDN M2/M3N           | 0111-04     | EM TEST           | 2018.08.24     | <input checked="" type="checkbox"/> |
| SIGNAL GENERATOR         | SMC100A              | 105221      | R&S               | 2018.08.01     | <input checked="" type="checkbox"/> |
| COAXIAL FIXED ATTENUATOR | 73-6-34              | MU918       | MCE/<br>WEINSCHEL | 2018.08.01     | <input checked="" type="checkbox"/> |
| BROADBAND AMPLIFIER      | BBA150               | 101937      | R&S               | 2018.08.25     | <input checked="" type="checkbox"/> |
| EM Clamp                 | KEMZ 801             | 17643       | SCHAFFNER         | 2018.04.07     | <input checked="" type="checkbox"/> |
| C.D.N                    | CDN T8 RJ45          | P1404129872 | EM TEST           | 2018.04.07     | <input checked="" type="checkbox"/> |
| C.D.N                    | CDN-T8-RJ45          | 0113-22     | EM TEST           | 2018.08.24     | <input checked="" type="checkbox"/> |

### 6.9.3 Photographs of test setup

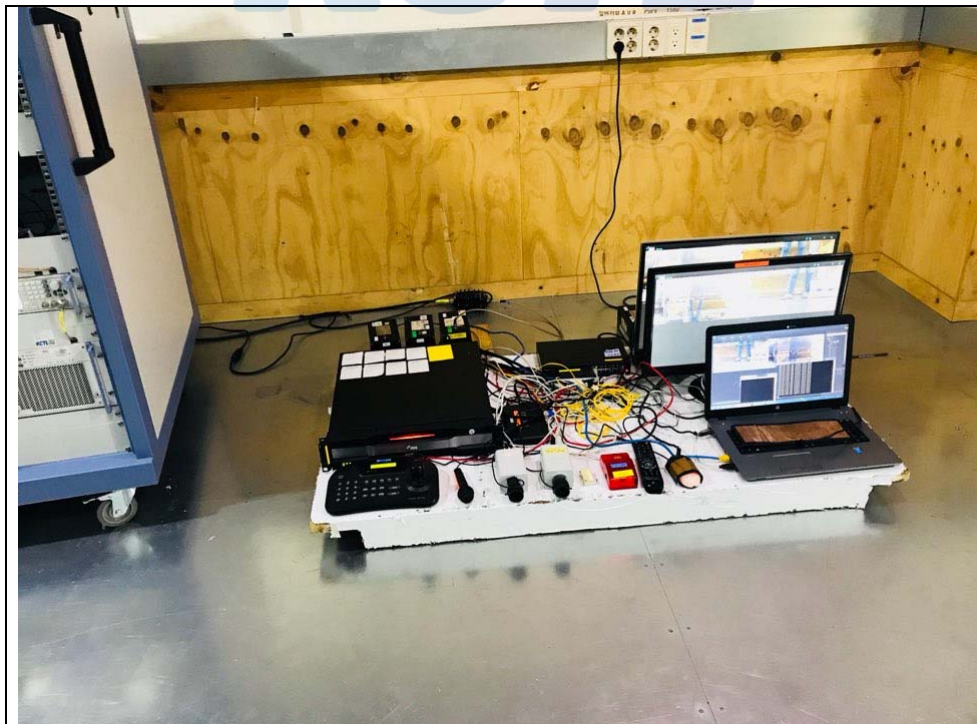

**KCTL Inc.**

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR18-SEC0064

Page (60) of (72)

**KCTL**

#### 6.9.4 Measurement result

##### AC Main

| Coupling point | Coupling method | Result |
|----------------|-----------------|--------|
| Power          | CDN(M3)         | Pass   |

##### Signal/Control

| Coupling point | Coupling method | Result |
|----------------|-----------------|--------|
| Alarm In/Out   | Clamp           | Pass   |
| RS-485         | Clamp           | Pass   |
| Audio In/Out   | Clamp           | Pass   |
| RS-232         | Clamp           | Pass   |

##### Telecommunication

| Coupling point    | Coupling method | Result |
|-------------------|-----------------|--------|
| Videoe In #3(LAN) | CDN(T8 RJ45)    | Pass   |
| LAN(RJ-45)        | CDN(T8-RJ45)    | Pass   |

This test report shall not be reproduced, except in full, without the written approval.



## 6.10 Dips and Interruption

|                    |  |                   |             |               |           |
|--------------------|--|-------------------|-------------|---------------|-----------|
| Test specification | EN 61000-4-11:2004   |                   |             |               |           |
| Number of dips     | 3 T  |                   |             |               |           |
| Duration           | 10 s   |                   |             |               |           |
| Phase              | Zero crossing (0 °)  |                   |             |               |           |
| Dwell time         | 1 s  |                   |             |               |           |
| Testing voltage    | 100 V, 50/60 Hz / 240 V, 50/60 Hz  |                   |             |               |           |
| Test facility      | Shielded room (6F)   |                   |             |               |           |
| Date               | 2018-03-05   |                   |             |               |           |
| Temperature(°C)    | 20.8 °C  | Humidity (% R.H.) | 30.6 % R.H. | Pressure(kPa) | 101.7 kPa |
| Remarks            | Pass<br>-There shall be no damage, malfunction or change of status due to the conditioning. Flickering of an indicator during the conditioning is permissible, providing that there is no residual change in the EUT or any change in outputs. |                   |             |               |           |

### 6.10.1 Measurement procedure

The dips/interruption test is only applicable to AC mains.

The dips/interruptions were applied at zero crossing.

### 6.10.2 Used equipments

| Equipment               | Model no.     | Serial no.  | Makers  | Next Cal. Date | Used                                |
|-------------------------|---------------|-------------|---------|----------------|-------------------------------------|
| ULTRA COMPACT SIMULATOR | UCS 500-M6BS1 | V0545100858 | EM TEST | 2018.04.07     | <input checked="" type="checkbox"/> |
| ULTRA COMPACT SIMULATOR | UCS 500M      | 0701-03     | EM TEST | 2018.08.24     | <input type="checkbox"/>            |

**KCTL Inc.**

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR18-SEC0064

Page (62) of (72)

**KCTL**

## 6.10.3 Photographs of test setup



## 6.10.4 Measurement result

100 V, 50/60 Hz / 240 V, 50/60 Hz

| Test Level (%UT) | Dip/Int. (%UT) | Duration /Period             | Angle (°) | Count number | Result |
|------------------|----------------|------------------------------|-----------|--------------|--------|
| 80 %             | 20 %           | 250 Period <sup>1)</sup>     | 0         | 3T           | Pass   |
| 70 %             | 30 %           | 25/30 Period                 | 0         | 3T           | Pass   |
| 40 %             | 60 %           | 10/12 Period                 | 0         | 3T           | Pass   |
| 0 %              | 100 %          | 250/300 Period <sup>2)</sup> | 0         | 3T           | Note   |

**Comment:**

- There was no change of operation status during above testing.

(250 Period<sup>1)</sup>, 25/30 Period, 10/12 Period)

- Note (250/300 Period<sup>2)</sup>)

The power of EUT is off during the test. After the test, EUT is getting back to normal operation.

It fully recorded using ancillary Power source equipment to content with Manufacturer's set up manual.

During the 250 period power loss, in accordance with the standard, a UPS was used to maintain full operation of the unit.

This test report shall not be reproduced, except in full, without the written approval.

## 6.11 Mains supply voltage variations

|                    |                                       |                   |             |               |           |
|--------------------|---------------------------------------|-------------------|-------------|---------------|-----------|
| Test specification | EN 50130-4:2011 /A1:2014              |                   |             |               |           |
| Supply voltage     | $U_{nom} + 10 \%$ , $U_{nom} - 15 \%$ |                   |             |               |           |
| Testing voltage    | 100 V, 50/60 Hz / 240 V, 50/60 Hz     |                   |             |               |           |
| Test facility      | Shielded room (6F)                    |                   |             |               |           |
| Date               | 2018-03-05                            |                   |             |               |           |
| Temperature(°C)    | 20.8 °C                               | Humidity (% R.H.) | 30.6 % R.H. | Pressure(kPa) | 101.7 kPa |
| Remarks            | Pass                                  |                   |             |               |           |

### 6.11.1 Used equipments

| Equipment               | Model no.     | Serial no.  | Makers  | Next Cal. Date | Used                                |
|-------------------------|---------------|-------------|---------|----------------|-------------------------------------|
| ULTRA COMPACT SIMULATOR | UCS 500-M6BS1 | V0545100858 | EM TEST | 2018.04.07     | <input checked="" type="checkbox"/> |
| ULTRA COMPACT SIMULATOR | UCS 500M      | 0701-03     | EM TEST | 2018.08.24     | <input type="checkbox"/>            |

### 6.11.2 Measurement result

100 V, 50/60 Hz

| Supply voltage |       | Result |
|----------------|-------|--------|
| + 10 %         | 110 V | Pass   |
| - 15 %         | 85 V  | Pass   |

240 V, 50/60 Hz

| Supply voltage |       | Result |
|----------------|-------|--------|
| + 10 %         | 264 V | Pass   |
| - 15 %         | 204 V | Pass   |

**Comment:**

- There was no change of operation status during above testing.

**KCTL Inc.**

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR18-SEC0064

Page (64) of (72)

**KCTL**

## 7. EUT photographs

### Whole



**KCTL Inc.**

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR18-SEC0064

Page (65) of (72)

**KCTL**

Front View



Rear View





**KCTL Inc.**

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR18-SEC0064

Page (66) of (72)

**KCTL**

Left View



Right View





**KCTL Inc.**

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR18-SEC0064

Page (67) of (72)

**KCTL**

Top View



Bottom View



**KCTL Inc.**

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR18-SEC0064

Page (68) of (72)

**KCTL**

Inside



KCTL

**KCTL Inc.**

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR18-SEC0064

Page (69) of (72)

**KCTL**

USB Mouse



**KCTL Inc.**

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR18-SEC0064

Page (70) of (72)

**KCTL**



**KCTL Inc.**

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR18-SEC0064

Page (71) of (72)



Remote Control





**KCTL Inc.**

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR18-SEC0064  
Page (72) of (72)

**KCTL**

